STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 3
AMENDED REPORT ☐

APPLICATION FOR PERMIT TO DRILL

1. WELL NAME and NUMBER
NBU 1022-11A4CS

2. TYPE OF WORK
DRILL NEW WELL ● REENTER P&A WELL ○ DEEPEN WELL ○

3. FIELD OR WILDCAT
NATURAL BUTTES

4. TYPE OF WELL
Gas Well Coalbed Methane Well: NO

5. UNIT or COMMUNITIZATION AGREEMENT NAME
NATURAL BUTTES

6. NAME OF OPERATOR
KERR-MCGEE OIL & GAS ONSHORE, L.P.

7. OPERATOR PHONE
720 929-6515

8. ADDRESS OF OPERATOR
P.O. Box 173779, Denver, CO, 80217

9. OPERATOR E-MAIL
julie.jacobson@anadarko.com

10. MINERAL LEASE NUMBER (FEDERAL, INDIAN, OR STATE)
UO1197A-ST

11. MINERAL OWNERSHIP
FEDERAL ○ INDIAN ○ STATE ● FEE ○

12. SURFACE OWNERSHIP
FEDERAL ○ INDIAN ○ STATE ● FEE ○

13. NAME OF SURFACE OWNER (if box 12 = 'fee')

14. SURFACE OWNER PHONE (if box 12 = 'fee')

15. ADDRESS OF SURFACE OWNER (if box 12 = 'fee')

16. SURFACE OWNER E-MAIL (if box 12 = 'fee')

17. INDIAN ALLOTTEE OR TRIBE NAME (if box 12 = 'INDIAN')

18. INTEND TO COMMINGLE PRODUCTION FROM MULTIPLE FORMATIONS
YES ● (Submit Commingling Application) NO ○

19. SLANT
VERTICAL ○ DIRECTIONAL ● HORIZONTAL ○

20. LOCATION OF WELL	FOOTAGES	QTR-QTR	SECTION	TOWNSHIP	RANGE	MERIDIAN
LOCATION AT SURFACE	2411 FNL 1535 FEL	SWNE	11	10.0 S	22.0 E	S
Top of Uppermost Producing Zone	1075 FNL 490 FEL	NENE	11	10.0 S	22.0 E	S
At Total Depth	1075 FNL 490 FEL	NENE	11	10.0 S	22.0 E	S

21. COUNTY
UINTAH

22. DISTANCE TO NEAREST LEASE LINE (Feet)
1075

23. NUMBER OF ACRES IN DRILLING UNIT
1674

25. DISTANCE TO NEAREST WELL IN SAME POOL (Applied For Drilling or Completed)
1355

26. PROPOSED DEPTH
MD: 8705 TVD: 8426

27. ELEVATION - GROUND LEVEL
5046

28. BOND NUMBER
22013542

29. SOURCE OF DRILLING WATER / WATER RIGHTS APPROVAL NUMBER IF APPLICABLE
43-8496

Hole, Casing, and Cement Information

String	Hole Size	Casing Size	Length	Weight	Grade & Thread	Max Mud Wt.	Cement	Sacks	Yield	Weight
Surf	11	8.625	0 - 2070	28.0	J-55 LT&C	0.2	Type V	180	1.15	15.8
							Class G	270	1.15	15.8
Prod	7.875	4.5	0 - 8705	11.6	I-80 LT&C	12.5	Premium Lite High Strength	260	3.38	11.0
							50/50 Poz	1220	1.31	14.3

ATTACHMENTS

VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES

- ☑ WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER
- ☑ COMPLETE DRILLING PLAN
- ☐ AFFIDAVIT OF STATUS OF SURFACE OWNER AGREEMENT (IF FEE SURFACE)
- ☐ FORM 5. IF OPERATOR IS OTHER THAN THE LEASE OWNER
- ☑ DIRECTIONAL SURVEY PLAN (IF DIRECTIONALLY OR HORIZONTALLY DRILLED)
- ☑ TOPOGRAPHICAL MAP

NAME Andy Lytle **TITLE** Regulatory Analyst **PHONE** 720 929-6100

SIGNATURE **DATE** 08/10/2011 **EMAIL** andrew.lytle@anadarko.com

API NUMBER ASSIGNED
43047518050000

APPROVAL

Permit Manager

RECEIVED: October 25, 2011

Kerr-McGee Oil & Gas Onshore. L.P.

NBU 1022-11A4CS

Surface: 2411 FNL / 1535 FEL SWNE
BHL: 1075 FNL / 490 FEL NENE

Section 11 T10S R22E

Uintah County, Utah
Mineral Lease: UO1197A-ST

ONSHORE ORDER NO. 1

DRILLING PROGRAM

1. & 2. **Estimated Tops of Important Geologic Markers:**
Estimated Depths of Anticipated Water, Oil, Gas, or Mineral Formations:

Formation	Depth	Resource
Uinta	0 - Surface	
Green River	955	
Birds Nest	1252	Water
Mahogany	1615	Water
Wasatch	4031	Gas
Mesaverde	6252	Gas
MVU2	7209	Gas
MVL1	7766	Gas
TVD	8426	Gas
TD	8705	Gas

3. **Pressure Control Equipment** (Schematic Attached)

Please refer to the attached Drilling Program

4. **Proposed Casing & Cementing Program:**

Please refer to the attached Drilling Program

5. **Drilling Fluids Program:**

Please refer to the attached Drilling Program

6. **Evaluation Program:**

Please refer to the attached Drilling Program

RECEIVED: August 10, 2011

7. Abnormal Conditions:

Maximum anticipated bottom hole pressure calculated at 8426' TVD, approximately equals 5,393 psi (0.64 psi/ft = actual bottomhole gradient)

Maximum Anticipated Bottom Hole Pressure (MABHP) = Pore Pressure at TD

Maximum anticipated surface pressure equals approximately 3,527 psi (bottom hole pressure minus the pressure of a partially evacuated hole calculated at 0.22 psi/foot, per Onshore Order No. 2).

Per Onshore Order No. 2 - Max Anticipated Surf. Press.(MASP) = (Pore Pressure at next csg point-
(0.22 psi/ft-partial evac gradient x TVD of next csg point))

8. Anticipated Starting Dates:

Drilling is planned to commence immediately upon approval of this application.

9. Variances:

Please refer to the attached Drilling Program.
Onshore Order #2 – Air Drilling Variance

Kerr-McGee Oil & Gas Onshore LP (KMG) respectfully requests a variance to several requirements associated with air drilling outlined in Onshore Order 2

- *Blowout Prevention Equipment (BOPE) requirements;*
- *Mud program requirements; and*
- *Special drilling operation (surface equipment placement) requirements associated with air drilling.*

This Standard Operating Practices addendum provides supporting information as to why KMG current air drilling practices for constructing the surface casing hole should be granted a variance to Onshore Order 2 air drilling requirements.

The reader should note that the air rig is used only to construct a stable surface casing hole through a historically difficult lost circulation zone. A conventional rotary rig follows the air rig, and is used to drill and construct the majority of the wellbore.

More notable, KMG has used the air rig layout and procedures outlined below to drill the surface casing hole in approximately 675 wells without incident of blow out or loss of life.

Background

In a typical well, KMG utilizes an air rig for drilling the surface casing hole, an interval from the surface to surface casing depths, which varies in depth from 1,700 to 2,800 feet. The air rig drilling operation does not drill through productive or over pressured formations in KMG field, but does penetrate the Uinta and Green River Formations. The purpose of the air drilling operation is to overcome the severe loss circulation zone in the Green River known as the Bird's Nest while creating a stable hole for the surface casing. The surface casing hole is generally drilled to approximately 500 feet below the Bird's Nest.

RECEIVED: August 10, 2011

Before the surface air rig is mobilized, a rathole rig is utilized to set and cement conductor pipe through a competent surface formation. Generally, the conductor is set at 40 feet. In some cases, conductor may be set deeper in areas that the surface formation is not found competent. This rig also drills the rat and mouse holes in preparation for the surface casing and production string drilling operations.

The air rig is then mobilized to drill the surface casing hole by drilling a 11 inch hole to just above the Bird's Nest interval with an air hammer. The hammer is then tripped and replaced with a 11 inch tri-cone bit. The tri-cone bit is used to drill to the surface casing point, approximately 500 feet below the loss circulation zone (Bird's Nest). The 8-5/8 inch surface casing is then run and cemented in place, thereby isolating the lost circulation zone.

KMG fully appreciates Onshore Order 2 well control and safety requirements associated with a typical air drilling operations. However, the requirements of Onshore Order 2 are excessive with respect to the air rig layout and drilling operation procedures that are currently in practice to drill and control the surface casing hole in KMG Fields.

Variance for BOPE Requirements
The air rig operation utilizes a properly lubricated and maintained air bowl diverter system which diverts the drilling returns to a six-inch blooie line. The air bowl is the only piece of BOPE equipment which is installed during drilling operations and is sufficient to contain the air returns associated with this drilling operation. As was discussed earlier, the drilling of the surface hole does not encounter any over pressured or productive zones, and as a result standard BOPE equipment should not be required. In addition, standard drilling practices do not support the use of BOPE on 40 feet of conductor pipe.

Variance for Mud Material Requirements
Onshore Order 2 also states that sufficient quantities of mud materials shall be maintained or readily accessible for the purpose of assuring adequate well control. Once again, the surface hole drilling operations does not encounter over pressured or productive intervals, and as a result there is not a need to control pressure in the surface hole with a mud system. Instead of mud, the air rigs utilize water from the reserve pit for well control, if necessary. A skid pump which is located near the reserve pit (see attachment) will supply the water to the well bore.

Variance for Special Drilling Operation (surface equipment placement) Requirements
Onshore Order 2 requires specific safety distances or setbacks for the placement of associated standard air drilling equipment, wellbore, and reserve pits. The air rigs used to drill the surface holes are not typical of an air rig used to drill a producing hole in other parts of the US. These are smaller in nature and designed to fit a KMG location. The typical air rig layout for drilling surface hole in the field is attached.

Typically the blooie line discharge point is required to be 100 feet from the well bore. In the case of a KMG well, the reserve pit is only 45 feet from the rig and is used for the drill cuttings. The blooie line, which transports the drill cuttings from the well to the reserve pit, subsequently discharges only 45 feet from the well bore.

Typically the air rig compressors are required to be located in the opposite direction from the blooie line and a minimum of 100 feet from the well bore. At the KMG locations, the air rig compressors are approximately 40 feet from the well bore and approximately 60 feet from the blooie line discharge due to the unique air rig design. The air compressors (see attachment) are located on the rig (1250 cfm) and

RECEIVED: August 10, 2011

on a standby trailer (1170 cfm). A booster sits between the two compressors and boosts the output from 350 psi to 2000 psi. The design does put the booster and standby compressor opposite from the blooie line.

Lastly, Onshore Order 2 addresses the need for an automatic igniter or continuous pilot light on the blooie line. The air rig does not utilize an igniter as the surface hole drilling operation does not encounter productive formations.

Conclusion

The air rig operating procedures and the attached air rig layout have effectively maintained well control while drilling the surface holes in KMG Fields. KMG respectfully requests a variance from Onshore Order 2 with respect to air drilling well control requirements as discussed above.

10. Other Information:

Please refer to the attached Drilling Program.

RECEIVED: August 10, 2011

KERR-McGEE OIL & GAS ONSHORE LP

DRILLING PROGRAM

COMPANY NAME	KERR-McGEE OIL & GAS ONSHORE LP			DATE	August 9, 2011
WELL NAME	**NBU 1022-11A4CS**			TD	8,426' TVD 8,705' MD
FIELD	Natural Buttes	COUNTY	Uintah	STATE	Utah
FINISHED ELEVATION	5045'				
SURFACE LOCATION	SWNE 2411 FNL 1535 FEL Sec 11 T 10S R 22E				
	Latitude: 39.964115 Longitude: -109.402537 NAD 27				
BTM HOLE LOCATION	NENE 1075 FNL 490 FEL Sec 11 T 10S R 22E				
	Latitude: 39.967781 Longitude: -109.398773 NAD 27				
OBJECTIVE ZONE(S)	Wasatch/Mesaverde				
ADDITIONAL INFO	Regulatory Agencies: UDOGM (Minerals), UDOGM (Surface), UDOGM Tri-County Health Dept.				

GEOLOGICAL			MECHANICAL		
LOGS	FORMATION TOPS	DEPTH	HOLE SIZE	CASING SIZE	MUD WEIGHT
		40'	14"		
			12-1/4	8-5/8", 28#, IJ-55, LTC	Air mist
		200'			
			11'	8-5/8", 28#, IJ-55, LTC	Air mist

All water flows encountered while drilling will be reported to the appropriate agencies.

Green River @	0,955'
Top of Birds Nest @	1,252'
Mahogany @	1,615'
Preset f/ GL @ 2,070' TVD	

Note: 11" surface hole will usually be drilled ±400' below the lost circulation zone (aka bird's nest). Drilled depth may be ±200' of the estimated set depth depending on the acutal depth of the loss zone.

Wasatch @	4,031'
Mverde @	6,252' TVD
MVU2 @	7,209' TVD
MVU1 @	7,766' TVD

Mud logging program TBD

Cased hole logging program from TD - surf csg

		7-7/8"	4-1/2" 11.6# I-80 or equivalent BTC/LTC csg
			Water / Fresh Water Mud 8.3-12.5 ppg

Max anticipated Mud required 12.5 ppg

TD @ 8,426' TVD 8,705' MD

API Well Number: 43047518050000

KERR-McGEE OIL & GAS ONSHORE LP

DRILLING PROGRAM

CASING PROGRAM

	SIZE	INTERVAL			WT.	GR.	CPLG.	DESIGN FACTORS BURST	COLLAPSE	LTC	BTC TENSION
CONDUCTOR	14"	0-40'									
								3,390	1,880	348,000	N/A
SURFACE	8-5/8"	0	to	2,070	28.00	IJ-55	LTC	2.61	1.94	6.86	N/A
								7,780	6,350	279,000	367,000
PRODUCTION	4-1/2"	0	to	8,705	11.60	I-80	LTC/BTC	1.11	1.16	3.42	4.49

Surface Casing:

(Burst Assumptions: TD = 12.5 ppg) 0.73 psi/ft = frac gradient @ surface shoe

Fracture at surface shoe with 0.1 psi/ft gas gradient above

(Collapse Assumption: Fully Evacuated Casing, Max MW) (Tension Assumptions: Air Weight of Casing*Buoy.Fact. of water)

Production casing:

(Burst Assumptions: Pressure test with 8.4ppg @ 7000 psi) 0.64 psi/ft = bottomhole gradient

(Collapse Assumption: Fully Evacuated Casing, Max MW) (Tension Assumptions: Air Weight of Casing*Buoy.Fact. of water)

CEMENT PROGRAM

		FT. OF FILL	DESCRIPTION	SACKS	EXCESS	WEIGHT	YIELD
SURFACE	LEAD	500'	Premium cmt + 2% CaCl	180	60%	15.80	1.15
Option 1			+ 0.25 pps flocele				
	TOP OUT CMT (6 jobs)	1,200'	20 gals sodium silicate + Premium cmt	270	0%	15.80	1.15
			+ 2% CaCl + 0.25 pps flocele				
SURFACE			**NOTE: If well will circulate water to surface, option 2 will be utilized**				
Option 2	LEAD	1,570'	65/35 Poz + 6% Gel + 10 pps gilsonite	150	35%	11.00	3.82
			+ 0.25 pps Flocele + 3% salt BWOW				
	TAIL	500'	Premium cmt + 2% CaCl	150	35%	15.80	1.15
			+ 0.25 pps flocele				
	TOP OUT CMT	as required	Premium cmt + 2% CaCl	as req.		15.80	1.15
PRODUCTION	LEAD	3,525'	Premium Lite II +0.25 pps	260	20%	11.00	3.38
			celloflake + 5 pps gilsonite + 10% gel				
			+ 0.5% extender				
	TAIL	5,180'	50/50 Poz/G + 10% salt + 2% gel	1,220	35%	14.30	1.31
			+ 0.1% R-3				

*Substitute caliper hole volume plus 0% excess for LEAD if accurate caliper is obtained

*Substitute caliper hole volume plus 10% excess for TAIL if accurate caliper is obtained

FLOAT EQUIPMENT & CENTRALIZERS

SURFACE	Guide shoe, 1 jt, insert float. Centralize first 3 joints with bow spring centralizers. Thread lock guide shoe
PRODUCTION	Float shoe, 1 jt, float collar. No centralizers will be used.

ADDITIONAL INFORMATION

Test casing head to 750 psi after installing. Test surface casing to 1,500 psi prior to drilling out.

BOPE: 11" 5M with one annular and 2 rams. The BOPE will be installed before the production hole is drilled and tested to 5,000 psi (annular to 2,500 psi) prior to drilling out the surface casing shoe. Record on chart recorder and tour sheet. Function test rams on each trip. Maintain safety valve and inside BOP on rig floor at all times. Most rigs have top drives; however, if used, the Kelly is to be equipped with upper and lower kelly valves.

Surveys will be taken at 1,000' minimum intervals.

Most rigs have PVT System for mud monitoring. If no PVT is available, visual monitoring will be utilized.

DRILLING ENGINEER: _____ **DATE:** _____

Nick Spence / Danny Showers

DRILLING SUPERINTENDENT: _____ **DATE:** _____

Kenny Gathings / Lovel Young

EXHIBIT A
NBU 1022-11A4CS

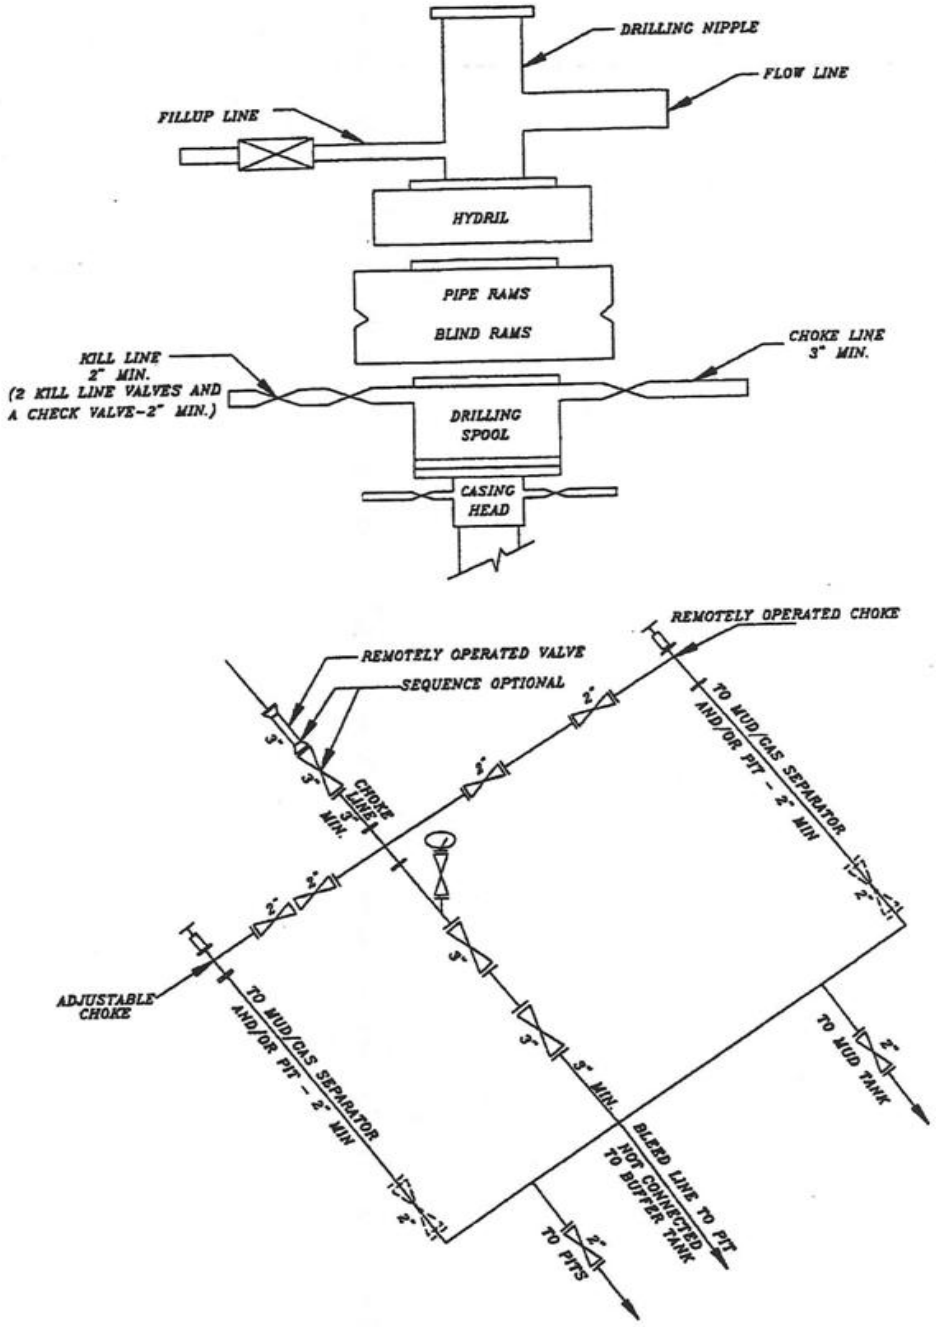

SCHEMATIC DIAGRAM OF 5,000 PSI BOP STACK

RECEIVED: August 10, 2011

API Well Number: 43047518050000

T10S, R22E, S.L.B.&M.

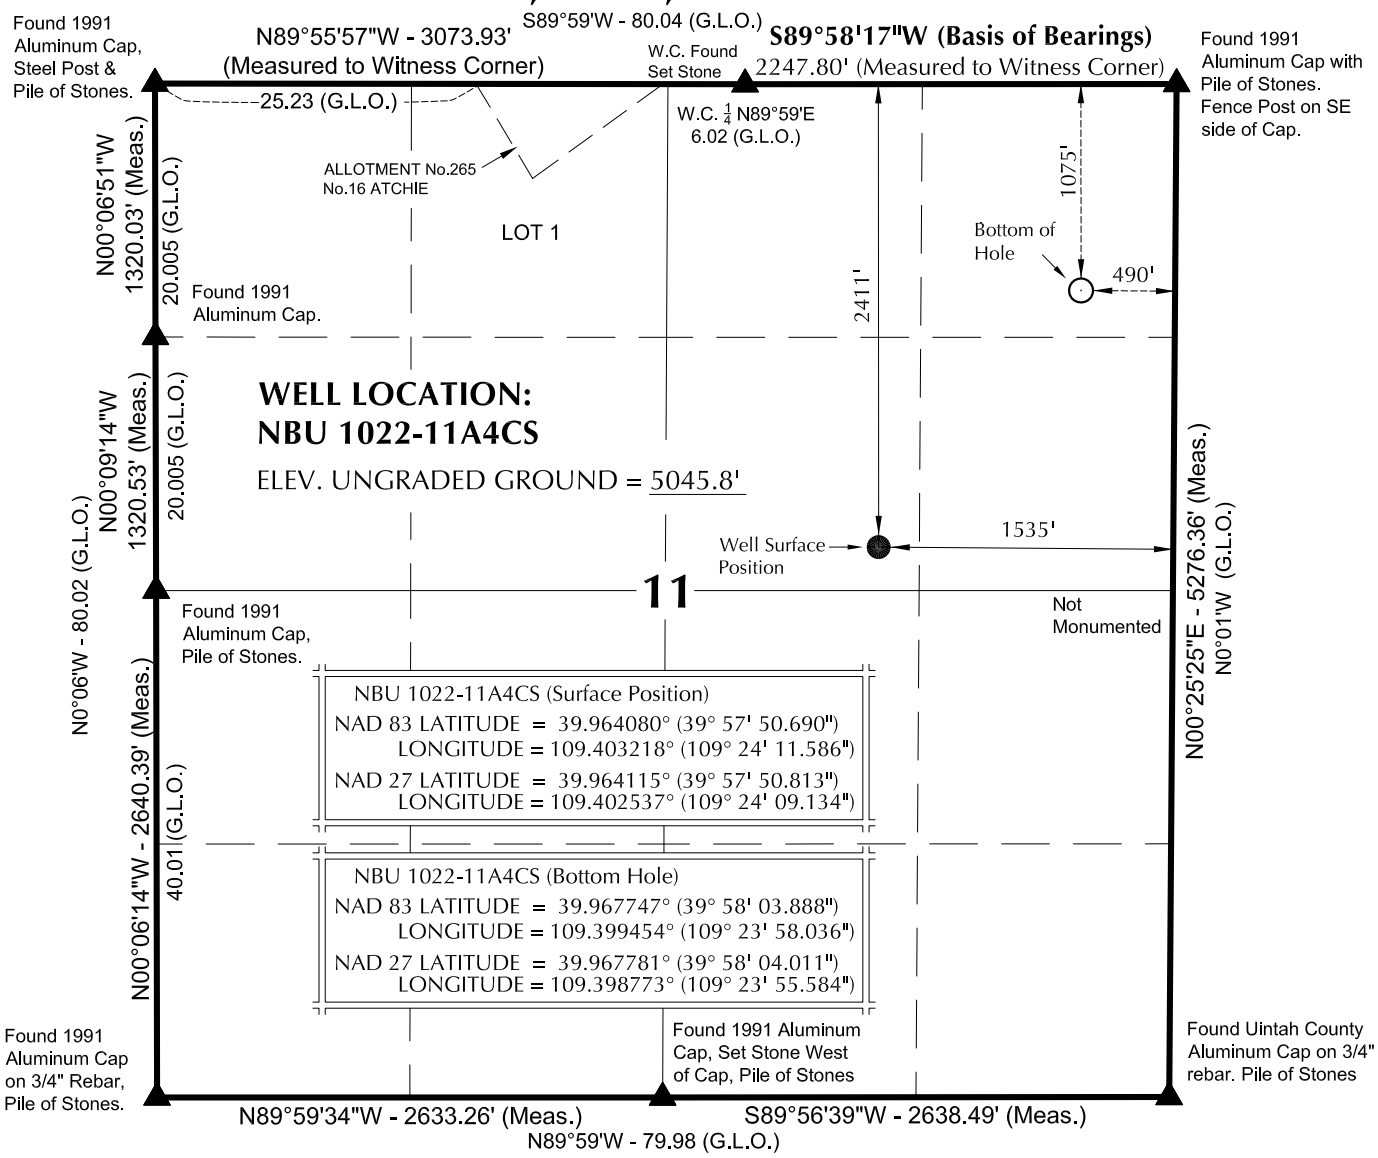

NOTES:

▲ = Section Corners Located

1. Well footages are measured at right angles to the Section Lines.
2. G.L.O. distances are shown in feet or chains. 1 chain = 66 feet.
3. The Bottom of hole bears N38°16'04"E 1702.41' from the Surface Position.
4. Bearings are based on Global Positioning Satellite observations.
5. Basis of elevation is Tri-Sta "Two Water" located in the NW ¼ of Section 1, T10S, R21E, S.L.B.&M. The elevation of this Tri-Sta is shown on the Big Pack Mtn NE 7.5 Min. Quadrangle as being 5238'.

1000' 500' 0' 1000'

SCALE

N

SURVEYOR'S CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

PROFESSIONAL LAND SURVEYOR No.6028691 JOHN R LAUGH STATE OF UTAH

PROFESSIONAL LAND SURVEYOR
REGISTRATION No. 6028691
STATE OF UTAH

1-17-11

Kerr-McGee Oil & Gas Onshore, LP
1099 18th Street - Denver, Colorado 80202

WELL PAD: NBU 1022-11G4

NBU 1022-11A4CS
WELL PLAT
1075' FNL, 490' FEL (Bottom Hole)
NE ¼ NE ¼ OF SECTION 11, T10S, R22E, S.L.B.&M., UINTAH COUNTY, UTAH.

609 CONSULTING, LLC
2155 North Main Street
Sheridan WY 82801
Phone 307-674-0609
Fax 307-674-0182

TIMBERLINE (435) 789-1365
ENGINEERING & LAND SURVEYING, INC.
209 NORTH 300 WEST - VERNAL, UTAH 84078

DATE SURVEYED: 12-23-10	SURVEYED BY: R.Y.	SHEET NO: 2
DATE DRAWN: 01-08-11	DRAWN BY: E.M.S.	2 OF 18
SCALE: 1" = 1000'	Date Last Revised:	

API Well Number: 43047518050000

WELL NAME	SURFACE POSITION					BOTTOM HOLE				
	NAD83		NAD27			NAD83		NAD27		
	LATITUDE	LONGITUDE	LATITUDE	LONGITUDE	FOOTAGES	LATITUDE	LONGITUDE	LATITUDE	LONGITUDE	FOOTAGES
NBU 1022-11H1BS	39°57'50.748" 39.964097°	109°24'11.482" 109.403190°	39°57'50.871" 39.964131°	109°24'09.030" 109.402508°	2405' FNL 1526' FEL	39°58'00.618" 39.966838°	109°23'58.070" 109.399464°	39°58'00.741" 39.966873°	109°23'55.619" 109.398783°	1406' FNL 490' FEL
NBU 1022-11A4CS	39°57'50.690" 39.964080°	109°24'11.586" 109.403218°	39°57'50.813" 39.964115°	109°24'09.134" 109.402537°	2411' FNL 1535' FEL	39°58'03.888" 39.967747°	109°23'58.036" 109.399454°	39°58'04.011" 39.967781°	109°23'55.584" 109.398773°	1075' FNL 490' FEL
NBU 1022-11G1CS	39°57'50.631" 39.964064°	109°24'11.689" 109.403247°	39°57'50.755" 39.964099°	109°24'09.237" 109.402566°	2417' FNL 1542' FEL	39°57'55.206" 39.965335°	109°24'12.971" 109.403603°	39°57'55.329" 39.965369°	109°24'10.519" 109.402922°	1954' FNL 1646' FEL
NBU 1022-11G1BS	39°57'50.573" 39.964048°	109°24'11.793" 109.403276°	39°57'50.696" 39.964082°	109°24'09.341" 109.402595°	2423' FNL 1550' FEL	39°57'59.020" 39.966394°	109°24'14.934" 109.404148°	39°57'59.143" 39.966429°	109°24'12.482" 109.403467°	1568' FNL 1802' FEL
NBU 1022-11G4BS	39°57'50.515" 39.964032°	109°24'11.897" 109.403305°	39°57'50.638" 39.964066°	109°24'09.445" 109.402624°	2429' FNL 1558' FEL	39°57'52.489" 39.964580°	109°24'14.977" 109.404160°	39°57'52.613" 39.964615°	109°24'12.524" 109.403479°	2229' FNL 1800' FEL
NBU 1022-11G4CS	39°57'50.456" 39.964016°	109°24'12.000" 109.403333°	39°57'50.580" 39.964050°	109°24'09.548" 109.402652°	2435' FNL 1566' FEL	39°57'49.229" 39.963675°	109°24'14.998" 109.404166°	39°57'49.352" 39.963709°	109°24'12.546" 109.403485°	2559' FNL 1799' FEL
NBU 272	39°57'50.374" 39.963993°	109°24'11.604" 109.403223°	39°57'50.497" 39.964027°	109°24'09.152" 109.402542°	2443' FNL 1536' FEL					

RELATIVE COORDINATES - From Surface Position to Bottom Hole

WELL NAME	NORTH	EAST	WELL NAME	NORTH	EAST	WELL NAME	NORTH	EAST	WELL NAME	NORTH	EAST
NBU 1022-11H1BS	999.7'	1,043.9'	NBU 1022-11A4CS	1,336.6'	1,054.4'	NBU 1022-11G1CS	462.9'	-100.1'	NBU 1022-11G1BS	854.8'	-245.2'
WELL NAME	NORTH	EAST	WELL NAME	NORTH	EAST						
NBU 1022-11G4BS	199.7'	-240.0'	NBU 1022-11G4CS	-124.4'	-233.4'						

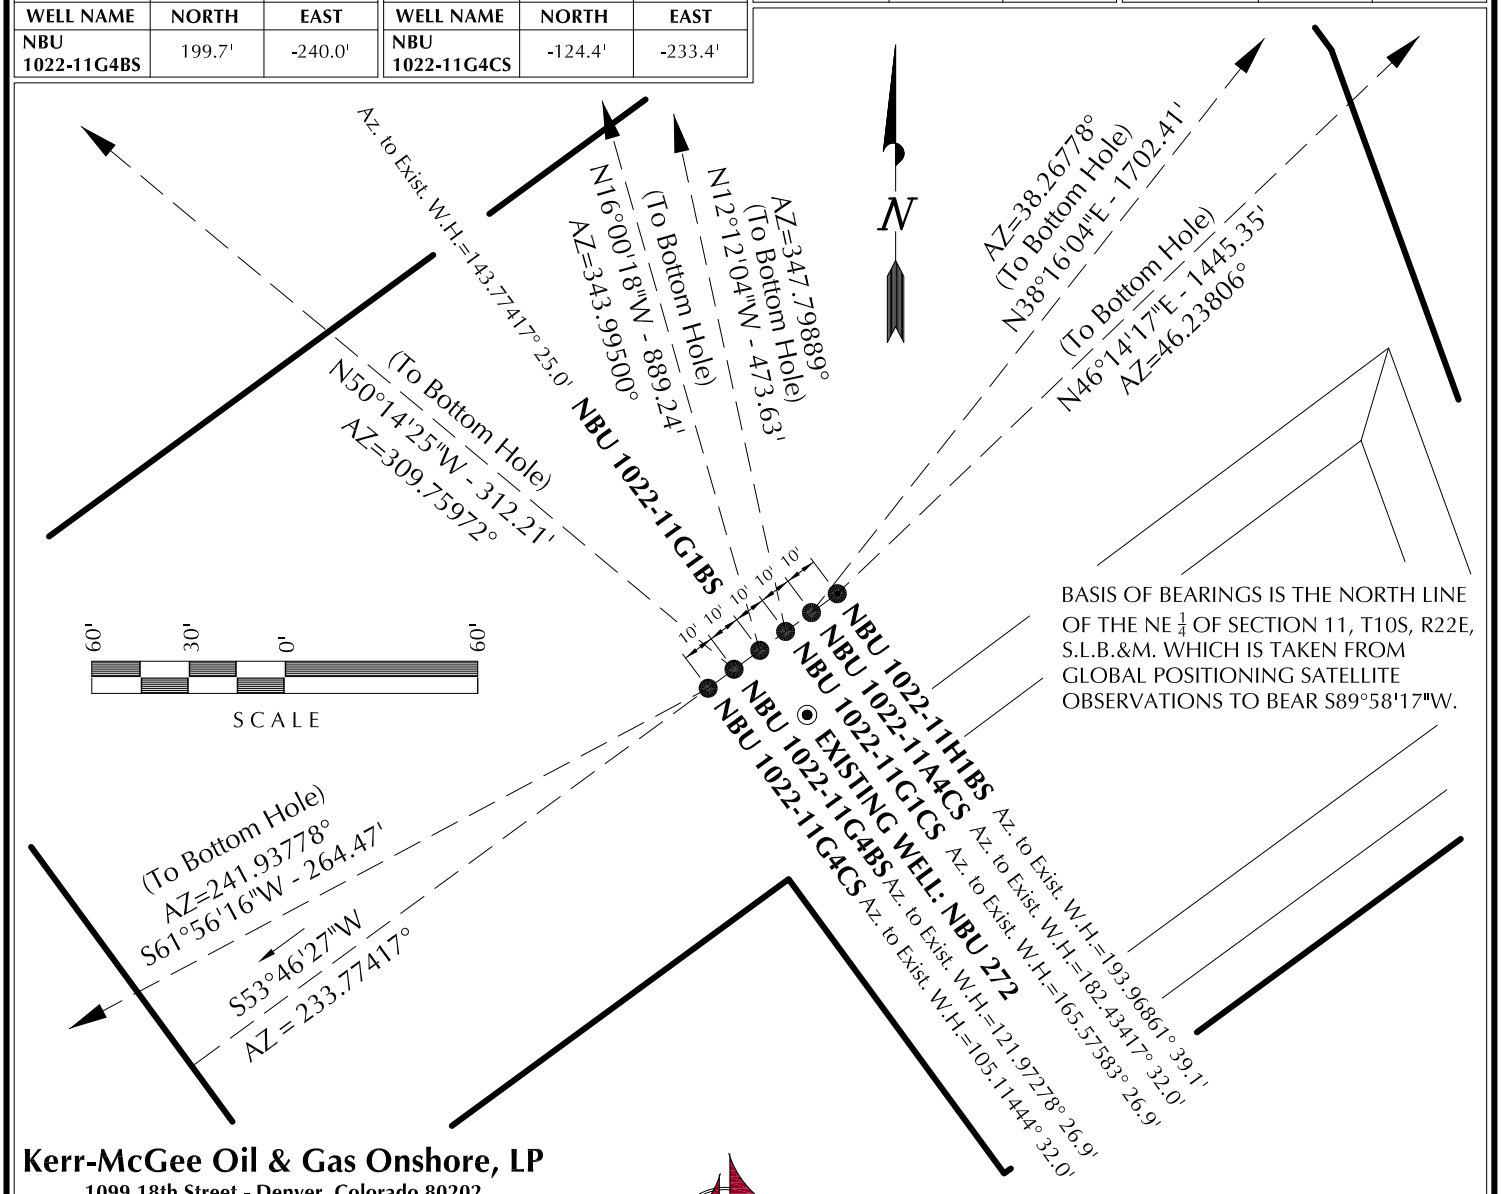

Kerr-McGee Oil & Gas Onshore, LP
1099 18th Street - Denver, Colorado 80202

WELL PAD - NBU 1022-11G4

WELL PAD INTERFERENCE PLAT
WELLS - NBU 1022-11H1BS, NBU 1022-11A4CS, NBU 1022-11G1CS, NBU 1022-11G1BS, NBU 1022-11G4BS & NBU 1022-11G4CS
LOCATED IN SECTION 11, T10S, R22E, S.L.B.&M., UINTAH COUNTY, UTAH.

609 CONSULTING, LLC
2155 North Main Street
Sheridan WY 82801
Phone 307-674-0609
Fax 307-674-0182

TIMBERLINE (435) 789-1365
ENGINEERING & LAND SURVEYING, INC.
209 NORTH 300 WEST - VERNAL, UTAH 84078

DATE SURVEYED: 12-23-10	SURVEYED BY: R.Y.	SHEET NO: 7
DATE DRAWN: 01-08-11	DRAWN BY: E.M.S.	7 OF 18
SCALE: 1" = 60'	Date Last Revised:	

RECEIVED: August 10, 2011

API Well Number: 43047518050000

DESIGN NOTE: THE NBU 1022-11G4 WELL PAD HAS BEEN DESIGNED SPECIFICALLY FOR THE ENSIGN / PIONEER RIG CONFIGURATION, DUE TO TOPOGRAPHICAL CONSTRAINTS.

PLEASE NOTE: LOCATIONS OF PROPOSED PIPELINES DISPLAYED WITHIN THE PAD AREA ARE FOR VISUALIZATION PURPOSES ONLY. ACTUAL LOCATIONS TO BE DETERMINED DURING CONSTRUCTION.

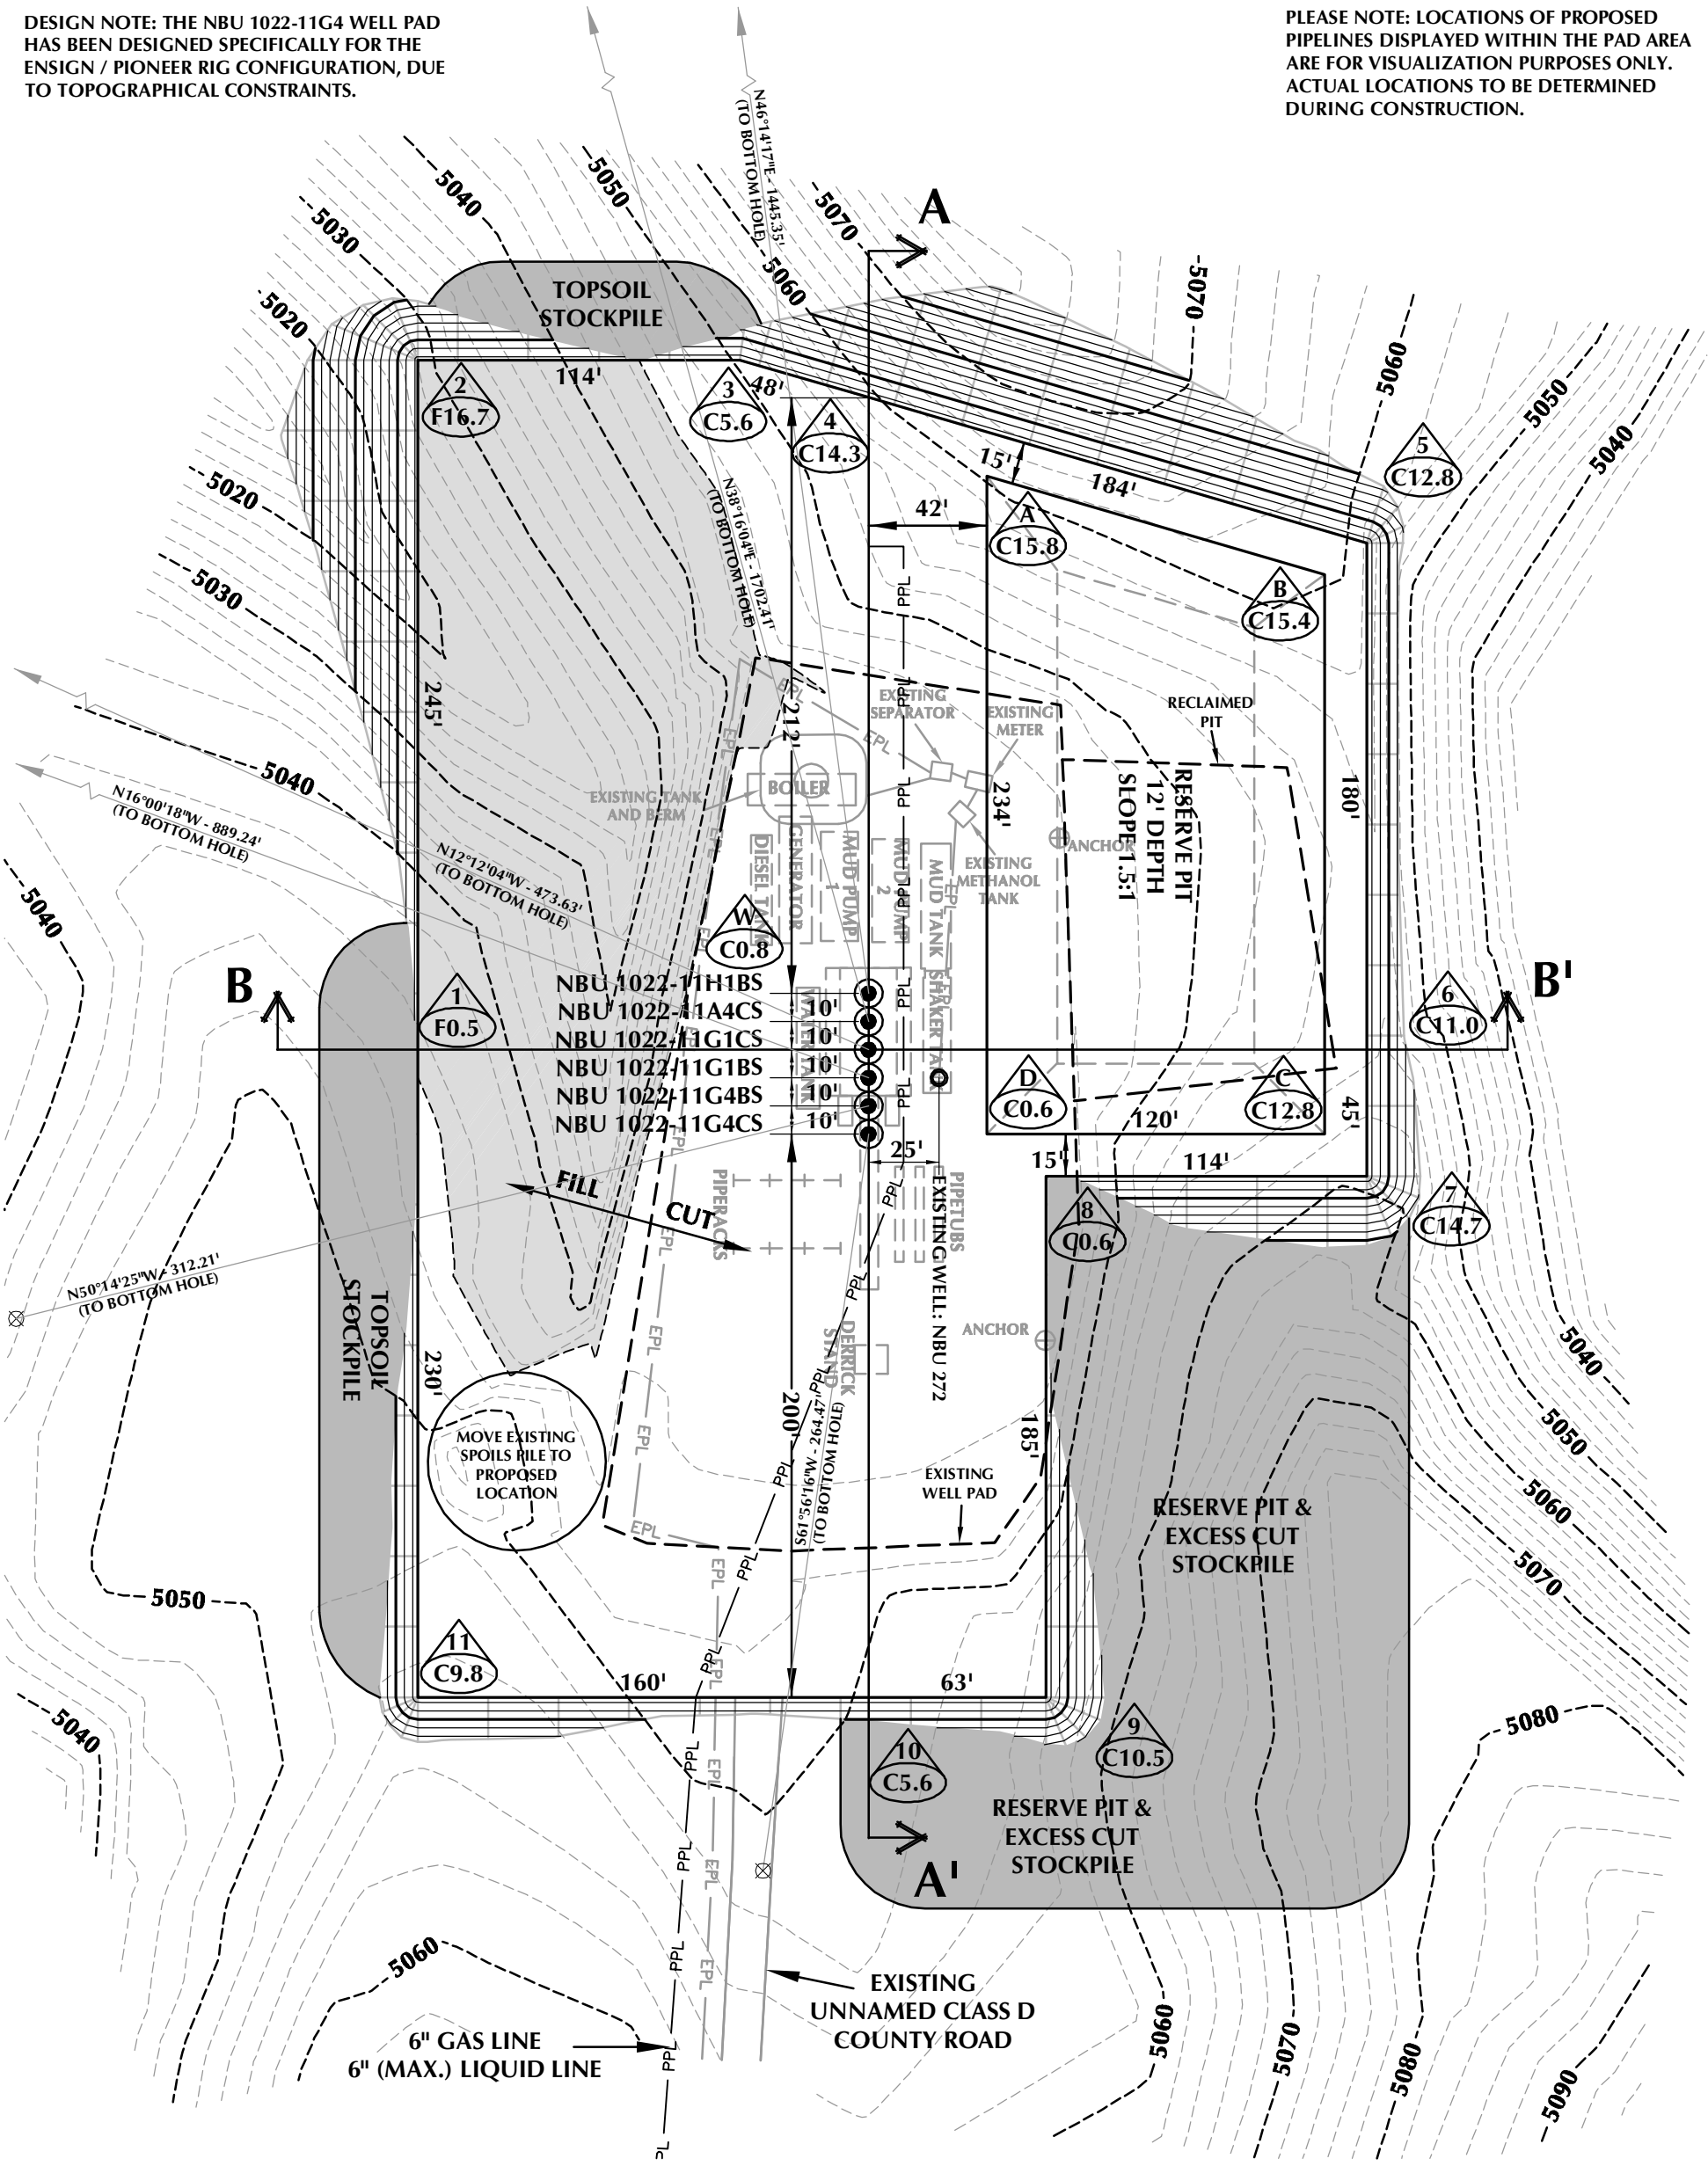

WELL PAD - NBU 1022-11G4 DESIGN SUMMARY

EXISTING GRADE @ CENTER OF WELL PAD = 5045.6'
FINISHED GRADE ELEVATION = 5044.8'
CUT SLOPES = 1.5:1
FILL SLOPES = 1.5:1
TOTAL WELL PAD AREA = 3.63 ACRES
TOTAL DAMAGE AREA = 6.27 ACRES
SHRINKAGE FACTOR = 1.10
SWELL FACTOR = 1.00

Kerr-McGee Oil & Gas Onshore, LP
1099 18th Street - Denver, Colorado 80202

WELL PAD - NBU 1022-11G4

WELL PAD - LOCATION LAYOUT
NBU 1022-11H1BS, NBU 1022-11A4CS, NBU 1022-11G1CS, NBU 1022-11G1BS, NBU 1022-11G4BS & NBU 1022-11G4CS
LOCATED IN SECTION 11, T10S, R22E, S.L.B.&M., UINTAH COUNTY, UTAH

609 CONSULTING, LLC
2155 North Main Street
Sheridan, WY 82801
Phone 307-674-0609
Fax 307-674-0182

WELL PAD QUANTITIES
TOTAL CUT FOR WELL PAD = 19,268 C.Y.
TOTAL FILL FOR WELL PAD = 16,982 C.Y.
TOPSOIL @ 6" DEPTH = 2,146 C.Y.
EXCESS MATERIAL = 2,286 C.Y.

RESERVE PIT QUANTITIES
TOTAL CUT FOR RESERVE PIT
+/- 9,020 C.Y.
RESERVE PIT CAPACITY (2' OF FREEBOARD)
+/- 34,500 BARRELS

WELL PAD LEGEND
- EXISTING WELL LOCATION
- PROPOSED WELL LOCATION
- PROPOSED BOTTOM HOLE LOCATION
- EXISTING CONTOURS (2' INTERVAL)
- PROPOSED CONTOURS (2' INTERVAL)
- PPL — PROPOSED PIPELINE
- EPL — EXISTING PIPELINE

HORIZONTAL 0 30' 60' 1" = 60'
2' CONTOURS

TIMBERLINE (435) 789-1365
ENGINEERING & LAND SURVEYING, INC.
209 NORTH 300 WEST - VERNAL, UTAH 84078

SCALE: 1"=60' | DATE: 3/3/11 | SHEET NO: 8 8 OF 18
REVISED:

C:\VANADARKO\2010_62_NBU_FOCUS_1022-11_14\DWG\NBU_1022-11G4\NBU_1022-11G4_PAD_20110106.DWG, 3/3/2011 6:47:25 PM

RECEIVED: August 10, 2011

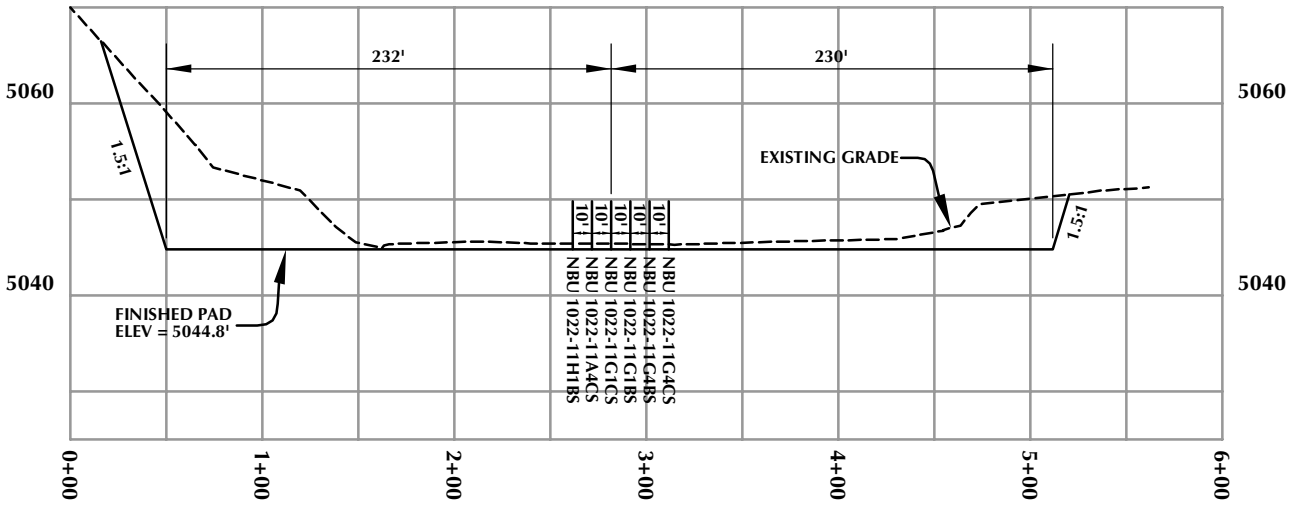

CROSS SECTION A-A'

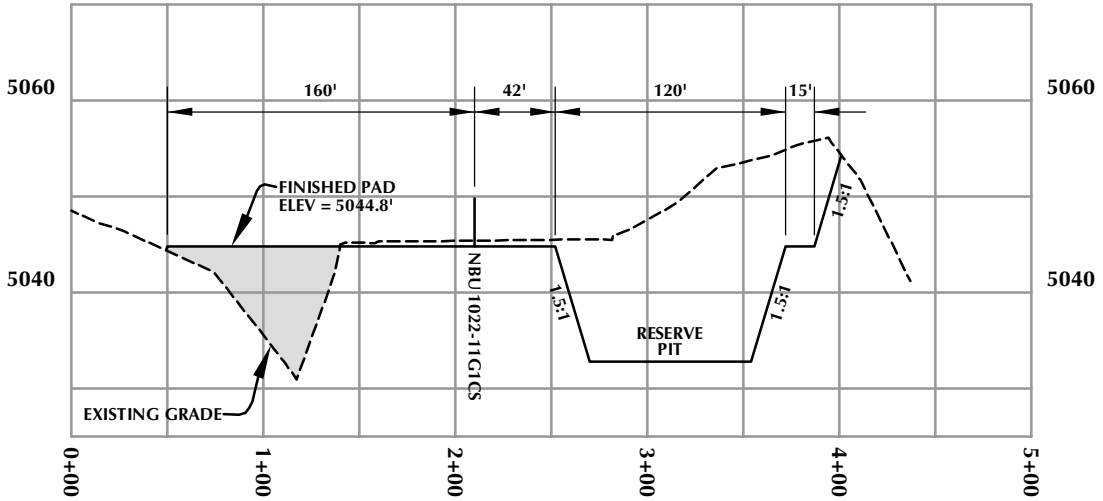

CROSS SECTION B-B'

Kerr-McGee Oil & Gas Onshore, LP
1099 18th Street - Denver, Colorado 80202

WELL PAD - NBU 1022-11G4

WELL PAD - CROSS SECTIONS
NBU 1022-11H1BS, NBU 1022-11A4CS,
NBU 1022-11G1CS, NBU 1022-11G1BS,
NBU 1022-11G4BS & NBU 1022-11G4CS
LOCATED IN SECTION 11, T10S, R22E,
S.L.B.&M., UINTAH COUNTY, UTAH

609
CONSULTING, LLC
2155 North Main Street
Sheridan, WY 82801
Phone 307-674-0609
Fax 307-674-0182

HORIZONTAL 0 50' 100' 1" = 100'
VERTICAL 0 10' 20' 1" = 20'

TIMBERLINE (435) 789-1365
ENGINEERING & LAND SURVEYING, INC.
209 NORTH 300 WEST - VERNAL, UTAH 84078

Scale: 1"=100' | Date: 3/3/11 | SHEET NO: 9 9 OF 18
REVISED:

K:\ANADARKO\2010_62_NBU_FOCUS_1022-11_14\DWG\NBU_1022-11G4\NBU_1022-11G4_PAD_20110106.DWG, 3/3/2011 6:39:01 PM

RECEIVED: August 10, 2011

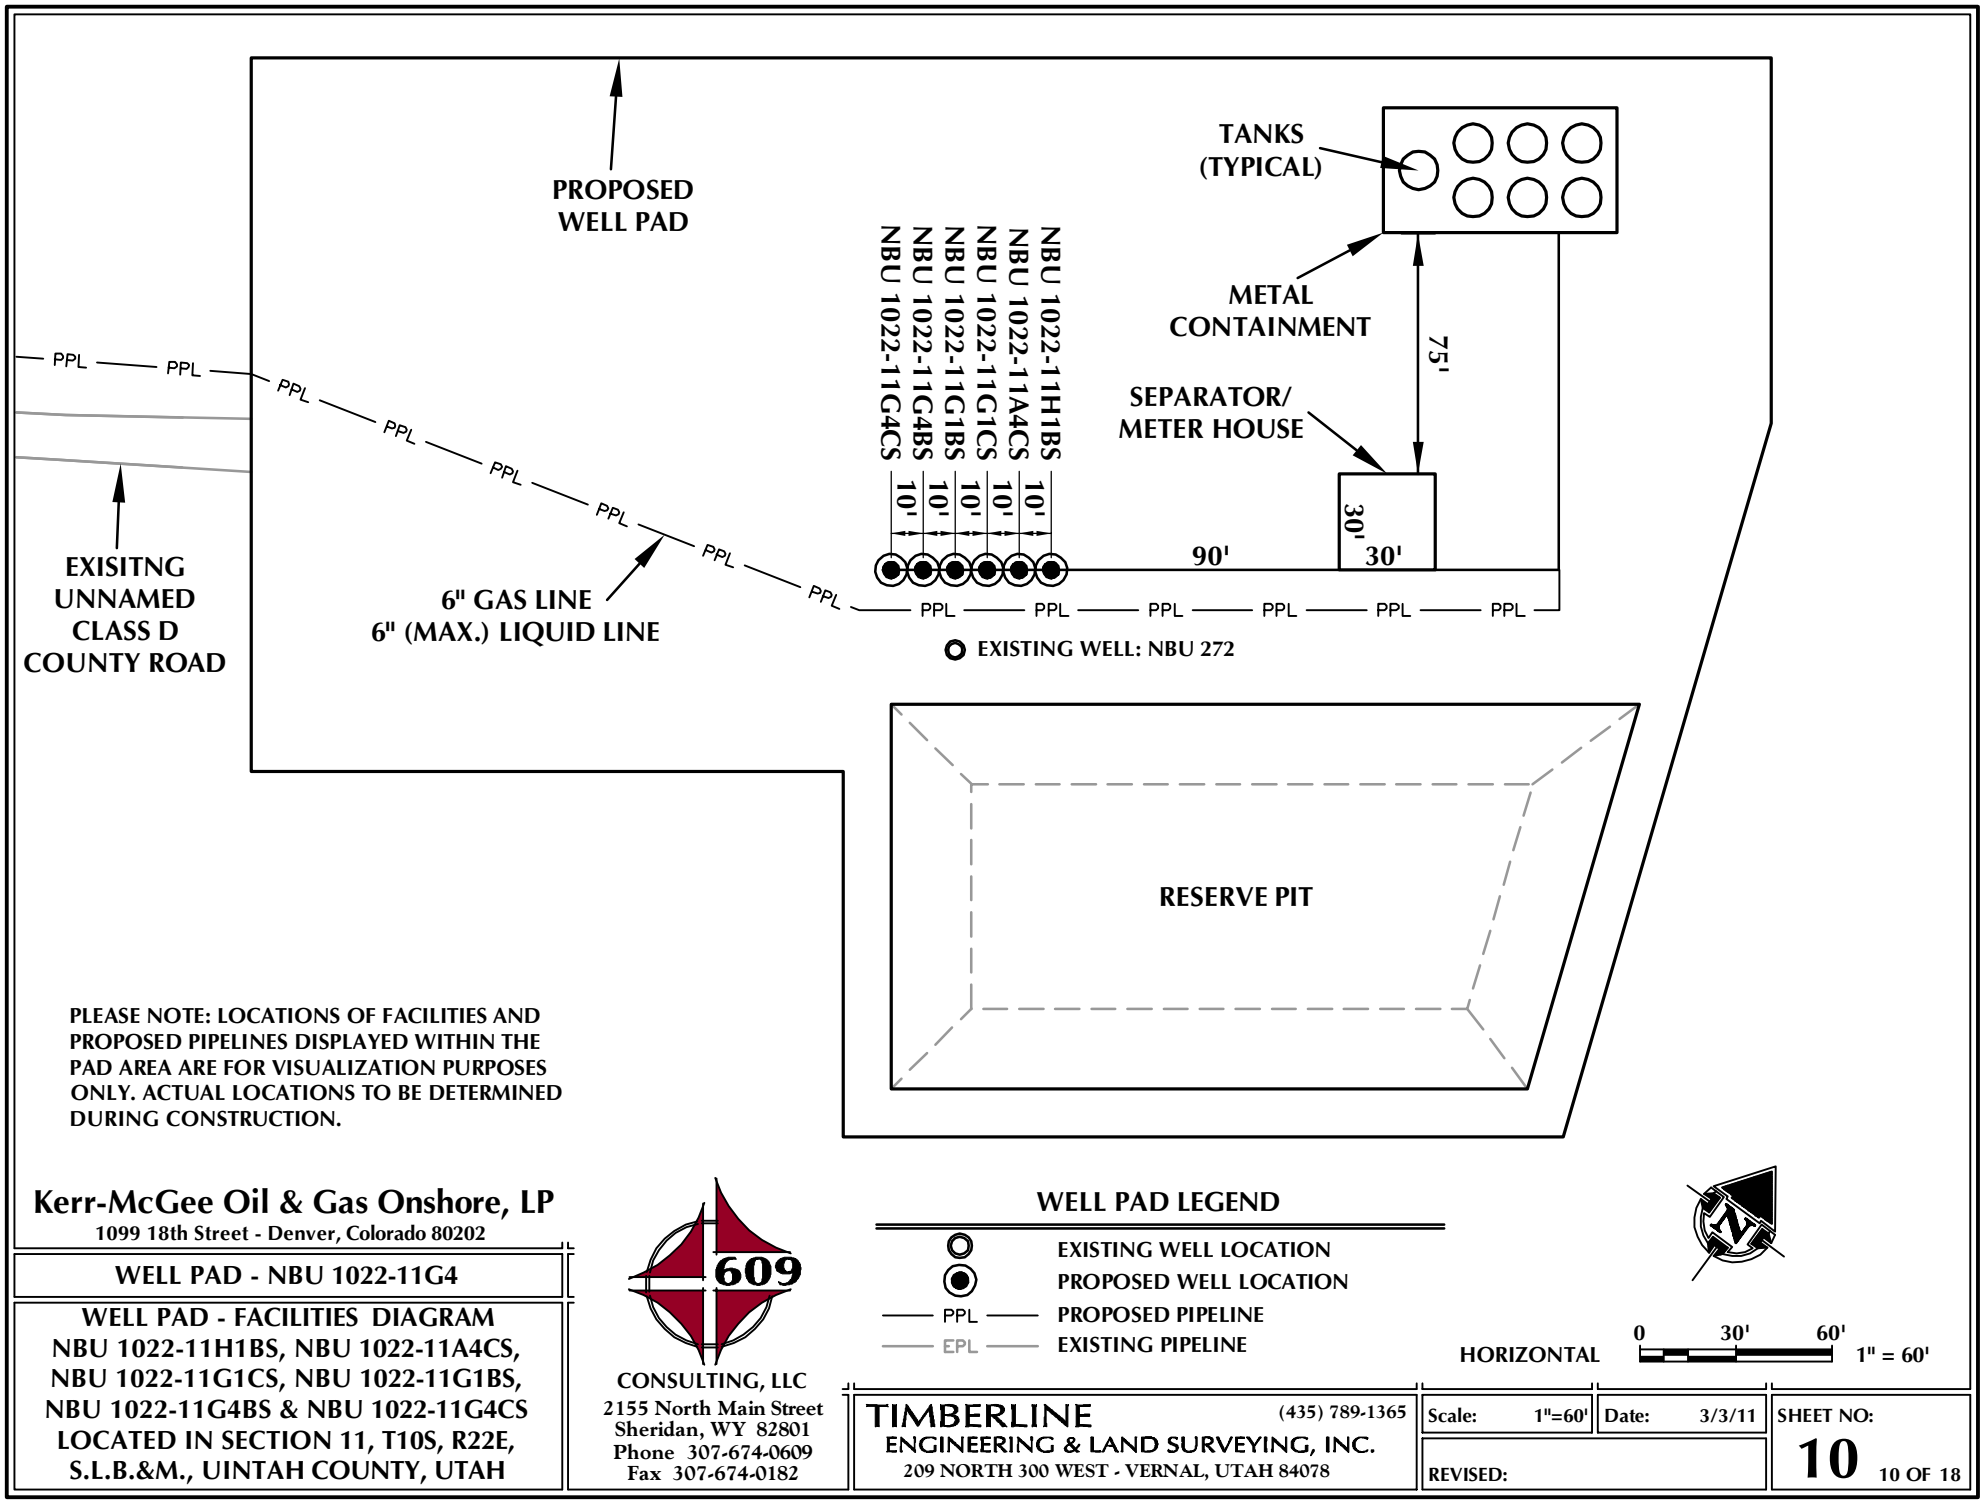

Kerr-McGee Oil & Gas Onshore, LP
1099 18th Street - Denver, Colorado 80202

WELL PAD - NBU 1022-11G4

WELL PAD - FACILITIES DIAGRAM
NBU 1022-11H1BS, NBU 1022-11A4CS,
NBU 1022-11G1CS, NBU 1022-11G1BS,
NBU 1022-11G4BS & NBU 1022-11G4CS
LOCATED IN SECTION 11, T10S, R22E,
S.L.B.&M., UINTAH COUNTY, UTAH

609
CONSULTING, LLC
2155 North Main Street
Sheridan, WY 82801
Phone 307-674-0609
Fax 307-674-0182

WELL PAD LEGEND

- EXISTING WELL LOCATION
- PROPOSED WELL LOCATION
- PPL — PROPOSED PIPELINE
- EPL — EXISTING PIPELINE

HORIZONTAL 0 30' 60' 1" = 60'

TIMBERLINE (435) 789-1365
ENGINEERING & LAND SURVEYING, INC.
209 NORTH 300 WEST - VERNAL, UTAH 84078

Scale: 1"=60' | Date: 3/3/11 | SHEET NO: 10 10 OF 18
REVISED:

K:\ANADARKO\2010_62_NBU_FOCUS_1022-11_14\DWG\NBU_1022-11G4\NBU_1022-11G4_PAD_20110106.DWG, 3/3/2011 6:40:06 PM

RECEIVED: August 10, 2011

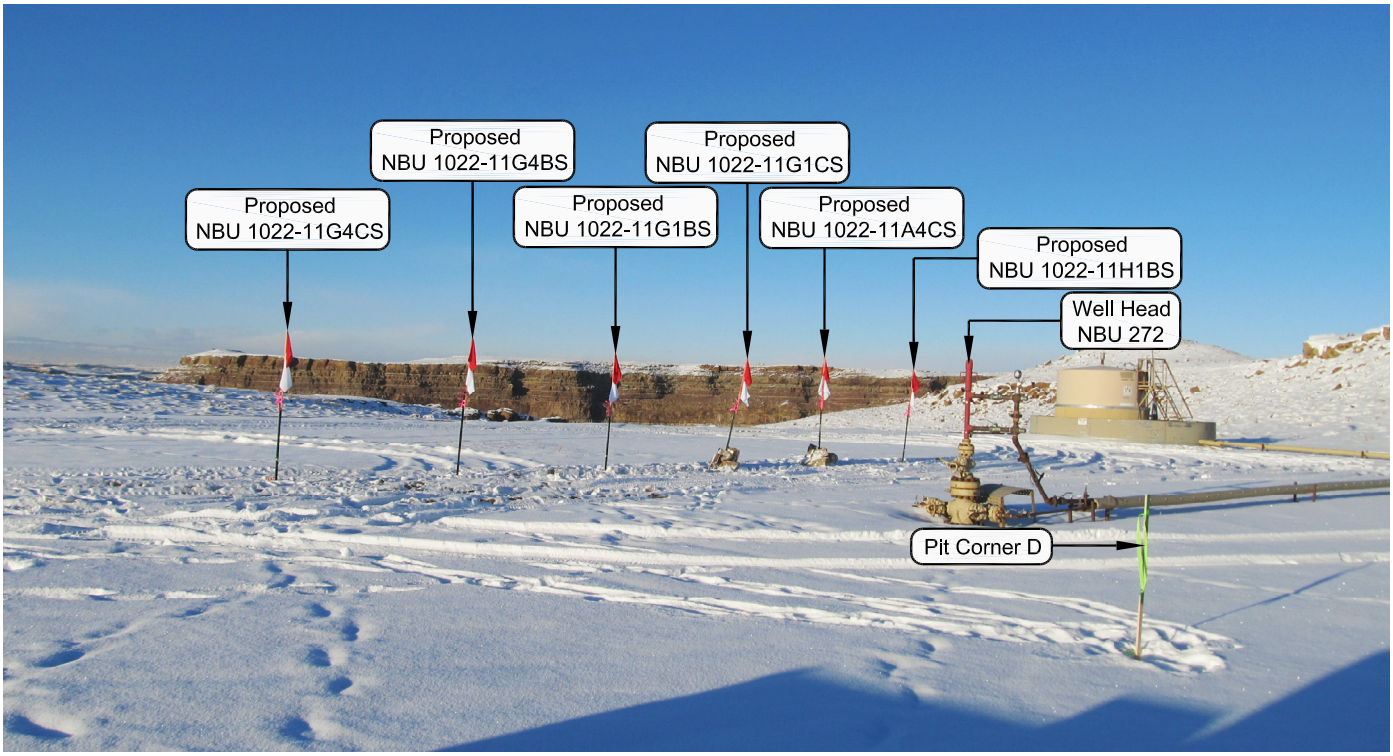

PHOTO VIEW: FROM PIT CORNER D TO LOCATION STAKE **CAMERA ANGLE: NORTHERLY**

PHOTO VIEW: FROM EXISTING ACCESS ROAD **CAMERA ANGLE: NORTHEASTERLY**

Kerr-McGee Oil & Gas Onshore, LP
1099 18th Street - Denver, Colorado 80202

WELL PAD - NBU 1022-11G4

LOCATION PHOTOS
NBU 1022-11H1BS, NBU 1022-11A4CS, NBU 1022-11G1CS, NBU 1022-11G1BS, NBU 1022-11G4BS & NBU 1022-11G4CS
LOCATED IN SECTION 11, T10S, R22E, S.L.B.&M., UINTAH COUNTY, UTAH.

609 CONSULTING, LLC
2155 North Main Street
Sheridan WY 82801
Phone 307-674-0609
Fax 307-674-0182

TIMBERLINE (435) 789-1365
ENGINEERING & LAND SURVEYING, INC.
209 NORTH 300 WEST - VERNAL, UTAH 84078

DATE PHOTOS TAKEN: 01-08-11	PHOTOS TAKEN BY: M.S.B.	SHEET NO: 11
DATE DRAWN: 01-08-11	DRAWN BY: E.M.S.	11 OF 18
Date Last Revised:		

RECEIVED: August 10, 2011

API Well Number: 43047518050000

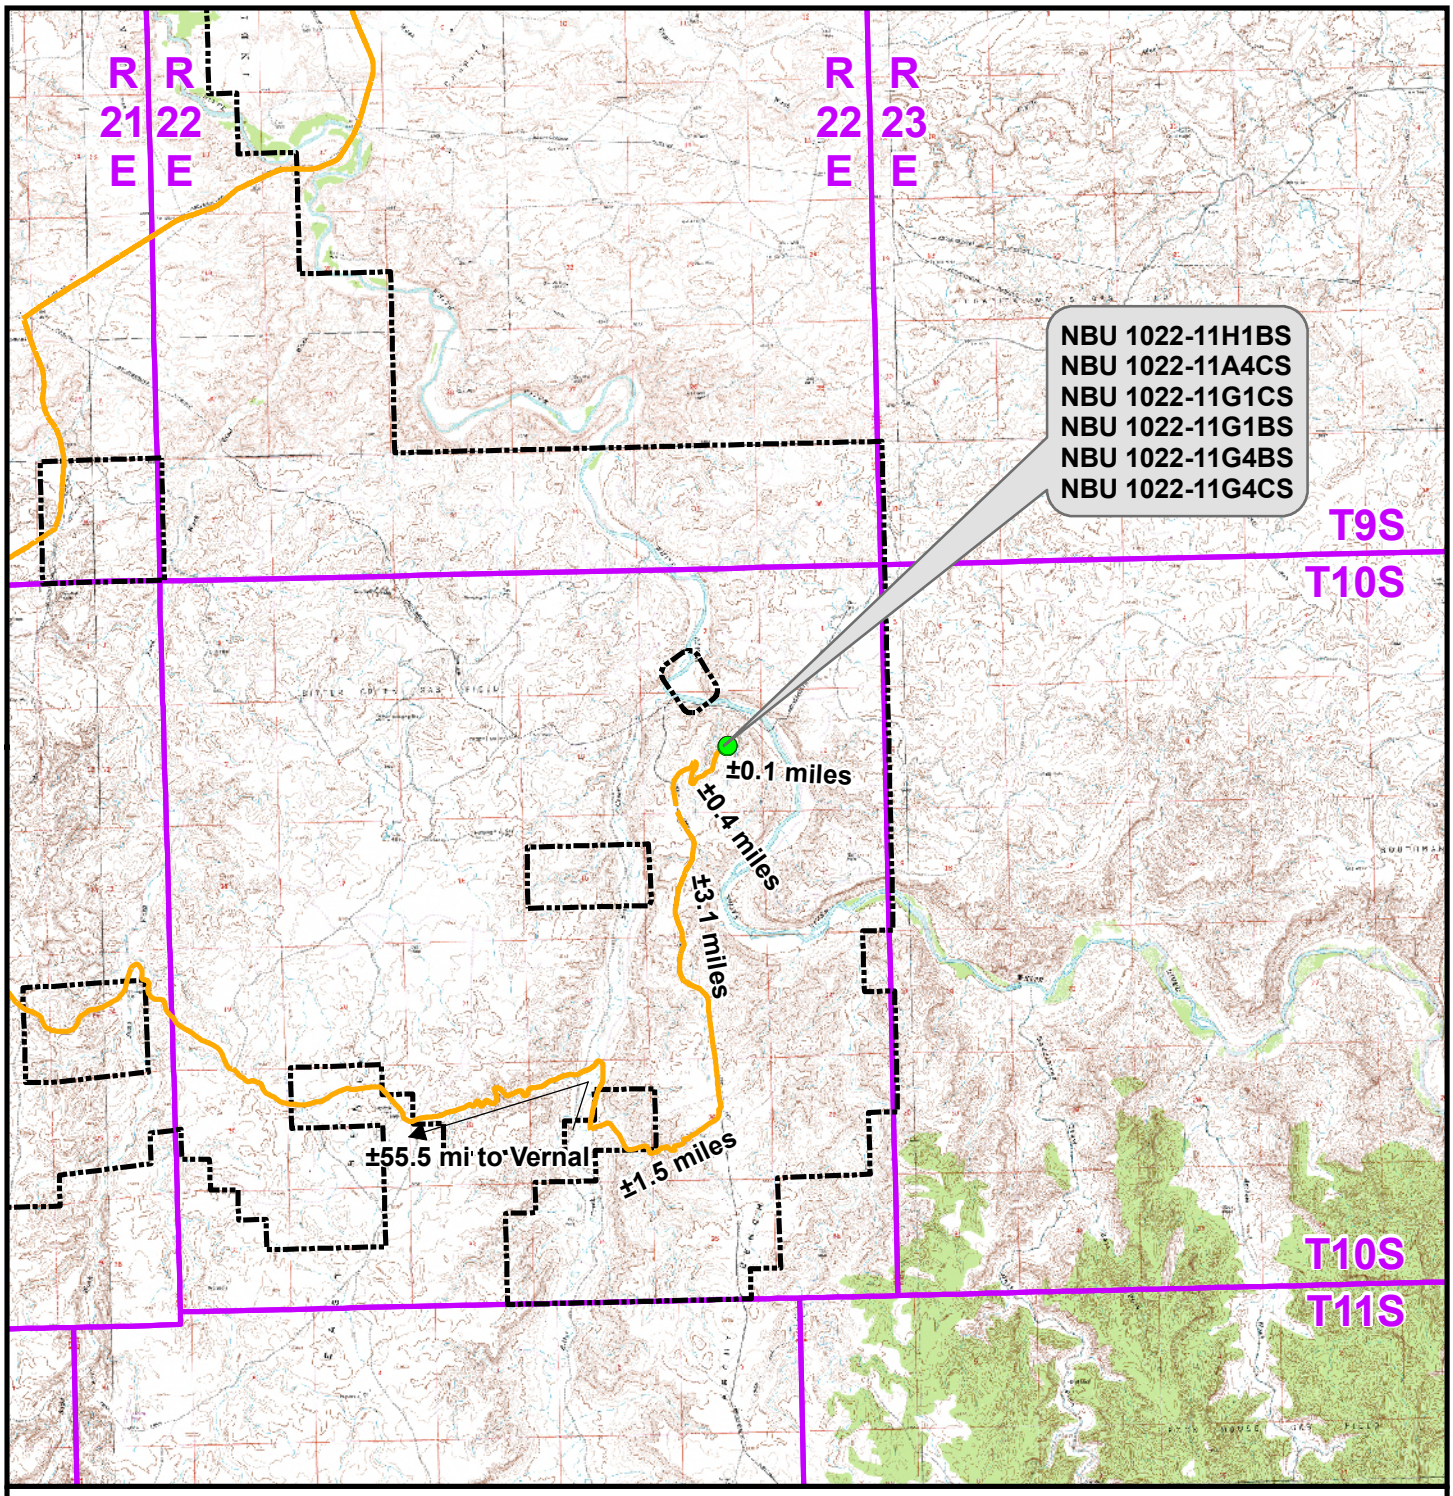

Legend

Distance From Well Pad - NBU 1022-11G4 To Unit Boundary: ±2,611ft

Proposed Well Location

Natural Buttes Unit Boundary

Access Route - Proposed

Kerr-McGee Oil & Gas Onshore, LP
1099 18th Street, Denver, Colorado 80202

WELL PAD - NBU 1022-11G4

TOPO A

NBU 1022-11H1BS, NBU 1022-11A4CS, NBU 1022-11G1CS, NBU 1022-11G1BS, NBU 1022-11G4BS & NBU 1022-11G4CS LOCATED IN SECTION 11, T10S, R22E, S.L.B.&M., UINTAH COUNTY, UTAH

609 CONSULTING, LLC
2155 North Main Street
Sheridan, WY 82801
Phone (307) 674-0609
Fax (307) 674-0182

N

Scale: 1:100,000	NAD83 USP Central	Sheet No: 12 of 18	
Drawn: TL	Date: 3 Mar 2011		
Revised:	Date:		

RECEIVED: August 10, 2011

API Well Number: 43047518050000

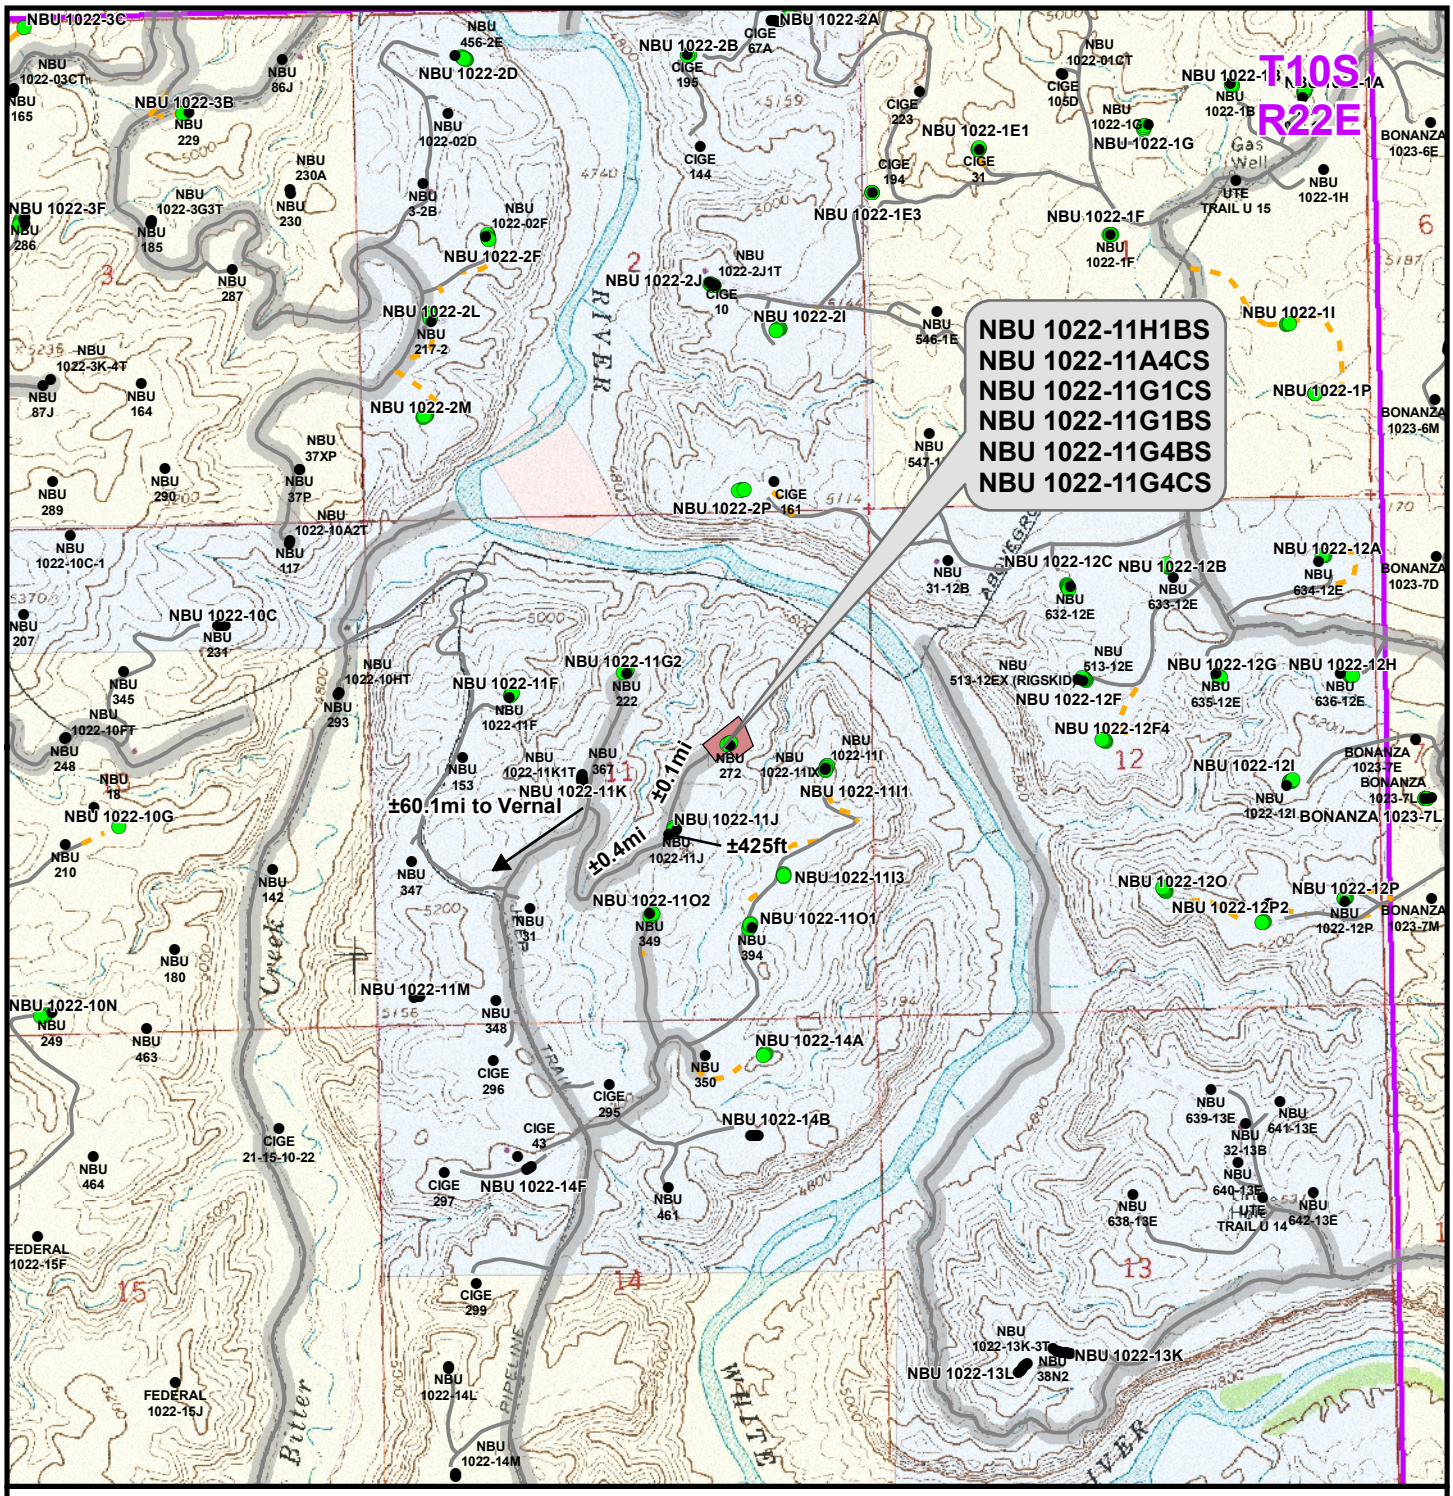

Legend

Well - Proposed | Well Pad | Road - Proposed | County Road | Bureau of Land Management | State

Well - Existing | Road - Existing | Indian Reservation | Private

Total Proposed Road Length: ±0ft

Kerr-McGee Oil & Gas Onshore, LP
1099 18th Street, Denver, Colorado 80202

WELL PAD - NBU 1022-11G4

TOPO B
NBU 1022-11H1BS, NBU 1022-11A4CS,
NBU 1022-11G1CS, NBU 1022-11G1BS,
NBU 1022-11G4BS & NBU 1022-11G4CS
LOCATED IN SECTION 11, T10S, R22E,
S.L.B.&M., UINTAH COUNTY, UTAH

609 CONSULTING, LLC
2155 North Main Street
Sheridan, WY 82801
Phone (307) 674-0609
Fax (307) 674-0182

N

Scale: 1" = 2,000ft	NAD83 USP Central	Sheet No:	
Drawn: TL	Date: 3 Mar 2011	13	13 of 18
Revised:	Date:		

API Well Number: 43047518050000

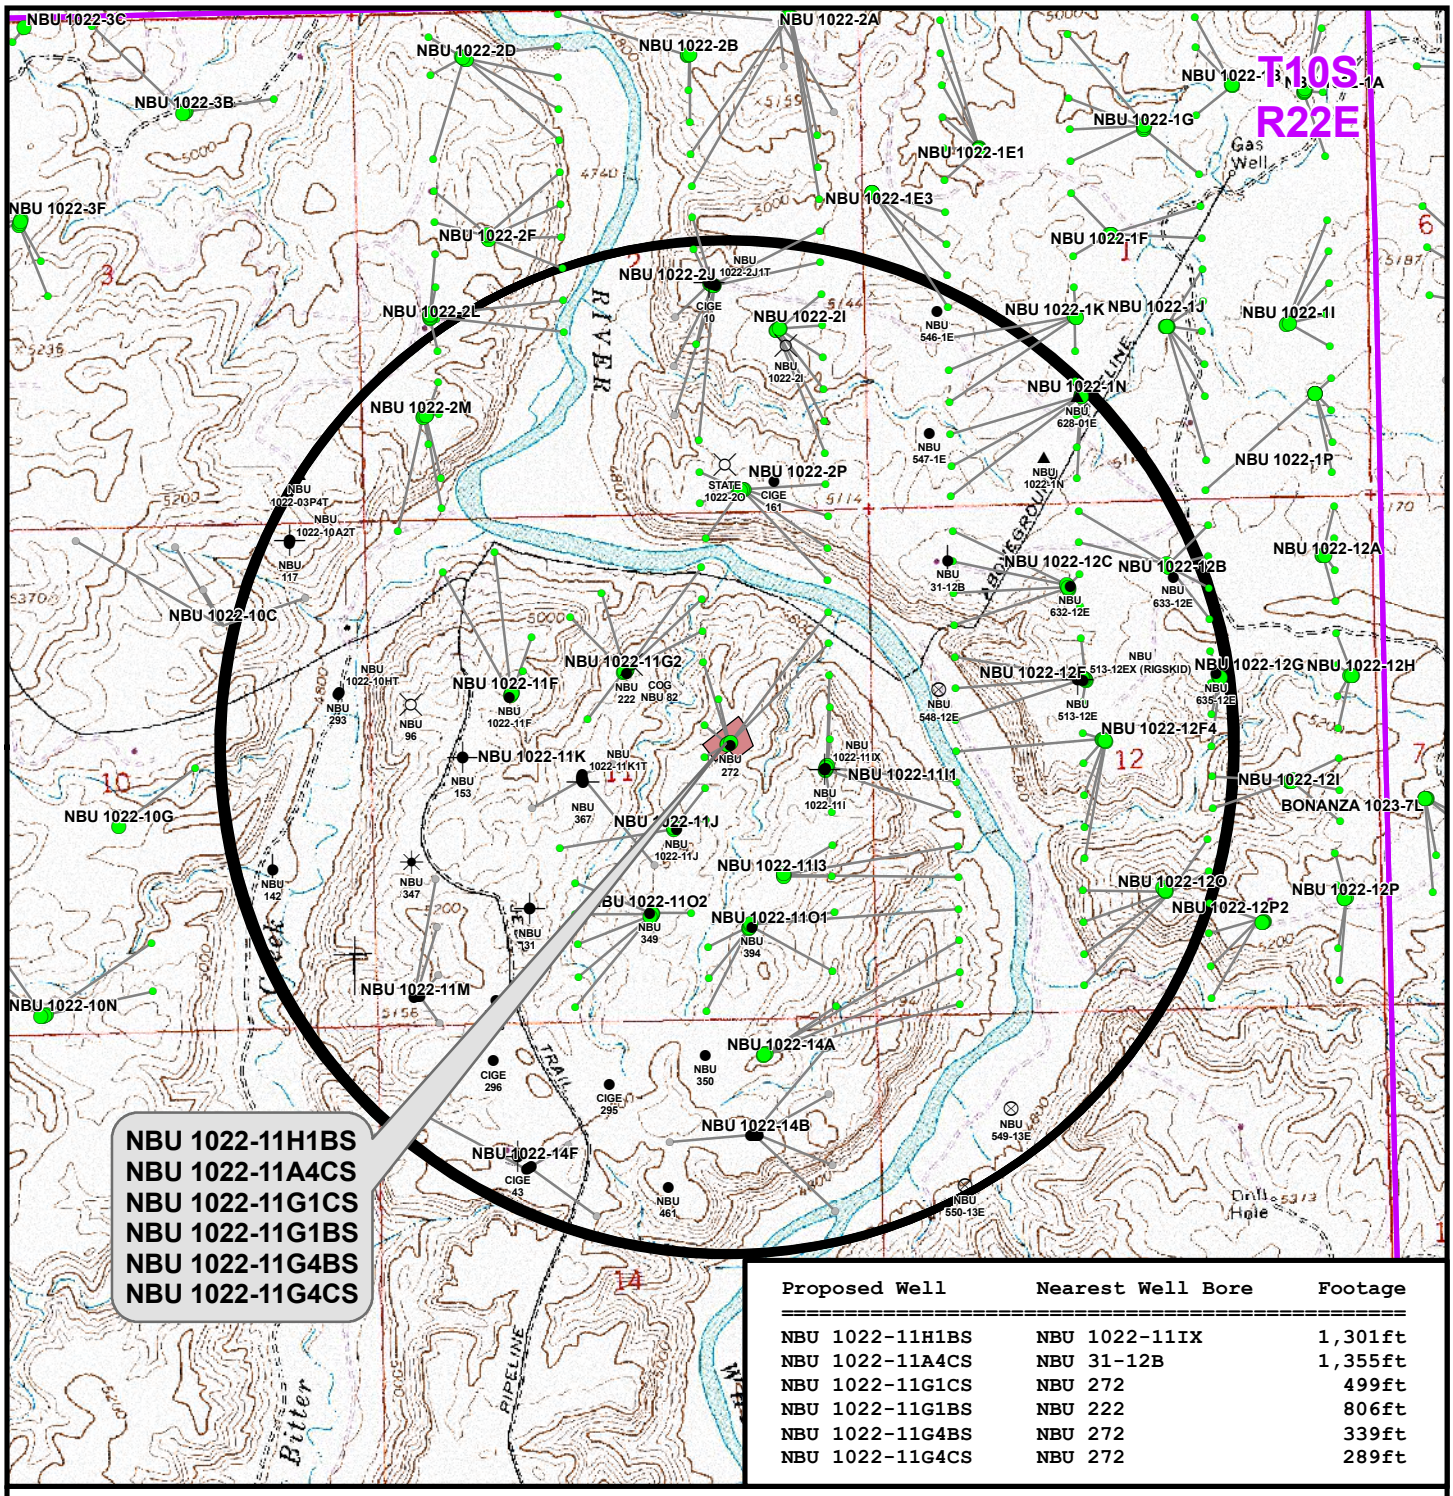

Proposed Well	Nearest Well Bore	Footage
NBU 1022-11H1BS	NBU 1022-11IX	1,301ft
NBU 1022-11A4CS	NBU 31-12B	1,355ft
NBU 1022-11G1CS	NBU 272	499ft
NBU 1022-11G1BS	NBU 222	806ft
NBU 1022-11G4BS	NBU 272	339ft
NBU 1022-11G4CS	NBU 272	289ft

Well locations derived from State of Utah, Dept. of Natural Resources, Division of Oil, Gas and Mining

Legend

- Well - Proposed
- Well Path
- Bottom Hole - Proposed
- Bottom Hole - Existing
- Well Pad
- Well - 1 Mile Radius

- Producing
- Active
- Spudded (Drilling commenced: Not yet completed)
- Approved permit (APD); not yet spudded
- New Permit (Not yet approved or drilled)
- Inactive
- Drilling Operations Suspended
- Temporarily-Abandoned
- Shut-In
- Plugged and Abandoned
- Location Abandoned
- Dry hole marker, buried
- Returned APD (Unapproved)

Kerr-McGee Oil & Gas Onshore, LP
1099 18th Street, Denver, Colorado 80202

WELL PAD - NBU 1022-11G4

TOPO C
NBU 1022-11H1BS, NBU 1022-11A4CS, NBU 1022-11G1CS, NBU 1022-11G1BS, NBU 1022-11G4BS & NBU 1022-11G4CS
LOCATED IN SECTION 11, T10S, R22E, S.L.B.&M., UINTAH COUNTY, UTAH

609 CONSULTING, LLC
2155 North Main Street
Sheridan, WY 82801
Phone (307) 674-0609
Fax (307) 674-0182

N

Scale: 1" = 2,000ft	NAD83 USP Central	Sheet No:
Drawn: TL	Date: 8 Feb 2011	14 of 18
Revised:	Date:	

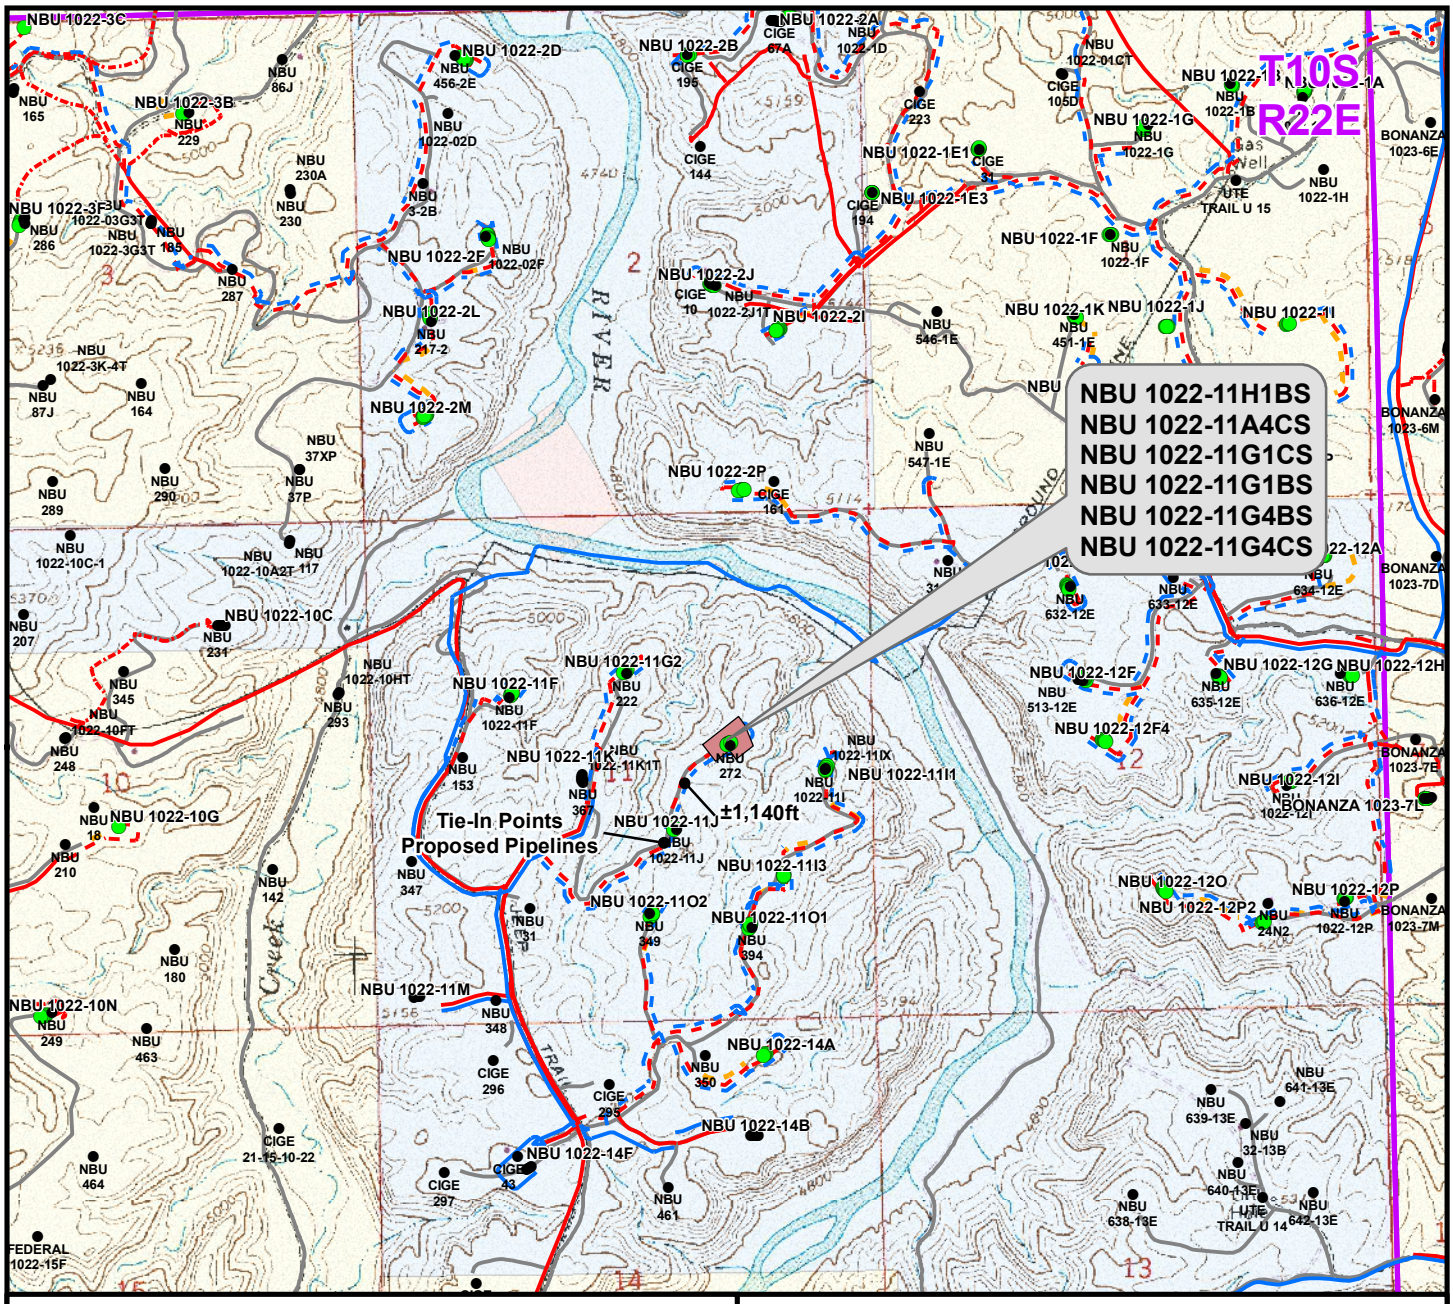

Proposed Liquid Pipeline	Length
Proposed 6" (Max.) (Meter House to Edge of Pad)	±490ft
Proposed 6" (Max.) (Edge of Pad to 11J Intersection)	±1,140ft
TOTAL PROPOSED LIQUID PIPELINE =	±1,630ft

Proposed Gas Pipeline	Length
Proposed 6" (Meter House to Edge of Pad)	±490ft
Proposed 6" (Edge of Pad to 11J Intersection)	±1,140ft
TOTAL PROPOSED GAS PIPELINE =	1,630ft

Legend

- Well - Proposed
- Well - Existing
- Well Pad
- Gas Pipeline - Proposed
- Gas Pipeline - To Be Upgraded
- Gas Pipeline - Existing
- Liquid Pipeline - Proposed
- Liquid Pipeline - Existing
- Road - Proposed
- Road - Existing
- Bureau of Land Management
- Indian Reservation
- State
- Private

Kerr-McGee Oil & Gas Onshore, LP
1099 18th Street, Denver, Colorado 80202

WELL PAD - NBU 1022-11G4

TOPO D
NBU 1022-11H1BS, NBU 1022-11A4CS, NBU 1022-11G1CS, NBU 1022-11G1BS, NBU 1022-11G4BS & NBU 1022-11G4CS
LOCATED IN SECTION 11, T10S, R22E, S.L.B.&M., UINTAH COUNTY, UTAH

609 CONSULTING, LLC
2155 North Main Street
Sheridan, WY 82801
Phone (307) 674-0609
Fax (307) 674-0182

N

Scale: 1" = 2,000ft	NAD83 USP Central	Sheet No: 15	15 of 18
Drawn: JFE	Date: 8 Feb 2011		
Revised:	Date:		

RECEIVED: August 10, 2011

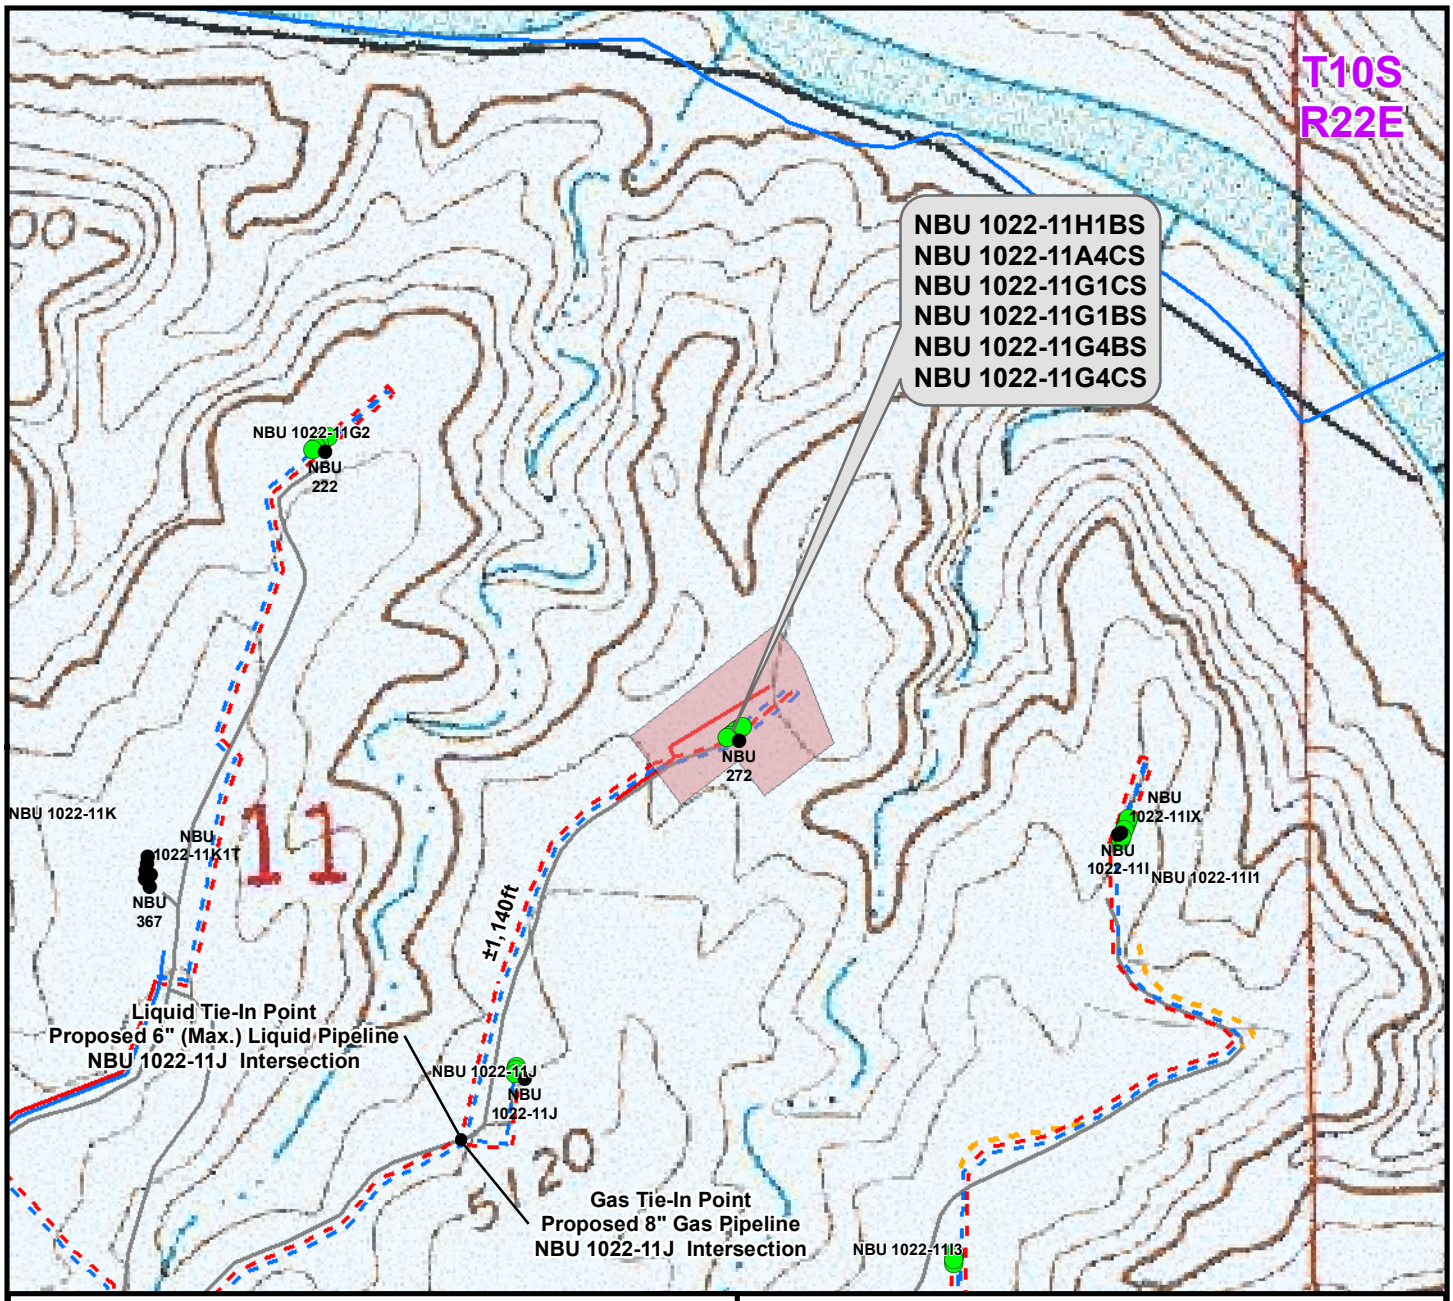

Proposed Liquid Pipeline	Length
Proposed 6"(Max.) (Meter House to Edge of Pad)	±490ft
Proposed 6"(Max.) (Edge of Pad to 11J Intersection)	±1,140ft
TOTAL PROPOSED LIQUID PIPELINE =	±1,630ft

Proposed Gas Pipeline	Length
Proposed 6" (Meter House to Edge of Pad)	±490ft
Proposed 6" (Edge of Pad to 11J Intersection)	±1,140ft
TOTAL PROPOSED GAS PIPELINE =	1,630ft

Legend

- Well - Proposed
- Well - Existing
- Well Pad
- Gas Pipeline - Proposed
- Gas Pipeline - To Be Upgraded
- Gas Pipeline - Existing
- Liquid Pipeline - Proposed
- Liquid Pipeline - Existing
- Road - Proposed
- Road - Existing
- Bureau of Land Management
- Indian Reservation
- State
- Private

Kerr-McGee Oil & Gas Onshore, LP
1099 18th Street, Denver, Colorado 80202

WELL PAD - NBU 1022-11G4

TOPO D2 (PAD & PIPELINE DETAIL)
NBU 1022-11H1BS, NBU 1022-11A4CS,
NBU 1022-11G1CS, NBU 1022-11G1BS,
NBU 1022-11G4BS & NBU 1022-11G4CS
LOCATED IN SECTION 11, T10S, R22E,
S.L.B.&M., UINTAH COUNTY, UTAH

609 CONSULTING, LLC
2155 North Main Street
Sheridan, WY 82801
Phone (307) 674-0609
Fax (307) 674-0182

N

Scale: 1" = 500ft	NAD83 USP Central	Sheet No:
Drawn: JFE	Date: 8 Feb 2011	16 16 of 18
Revised:	Date:	

RECEIVED: August 10, 2011

API Well Number: 43047518050000

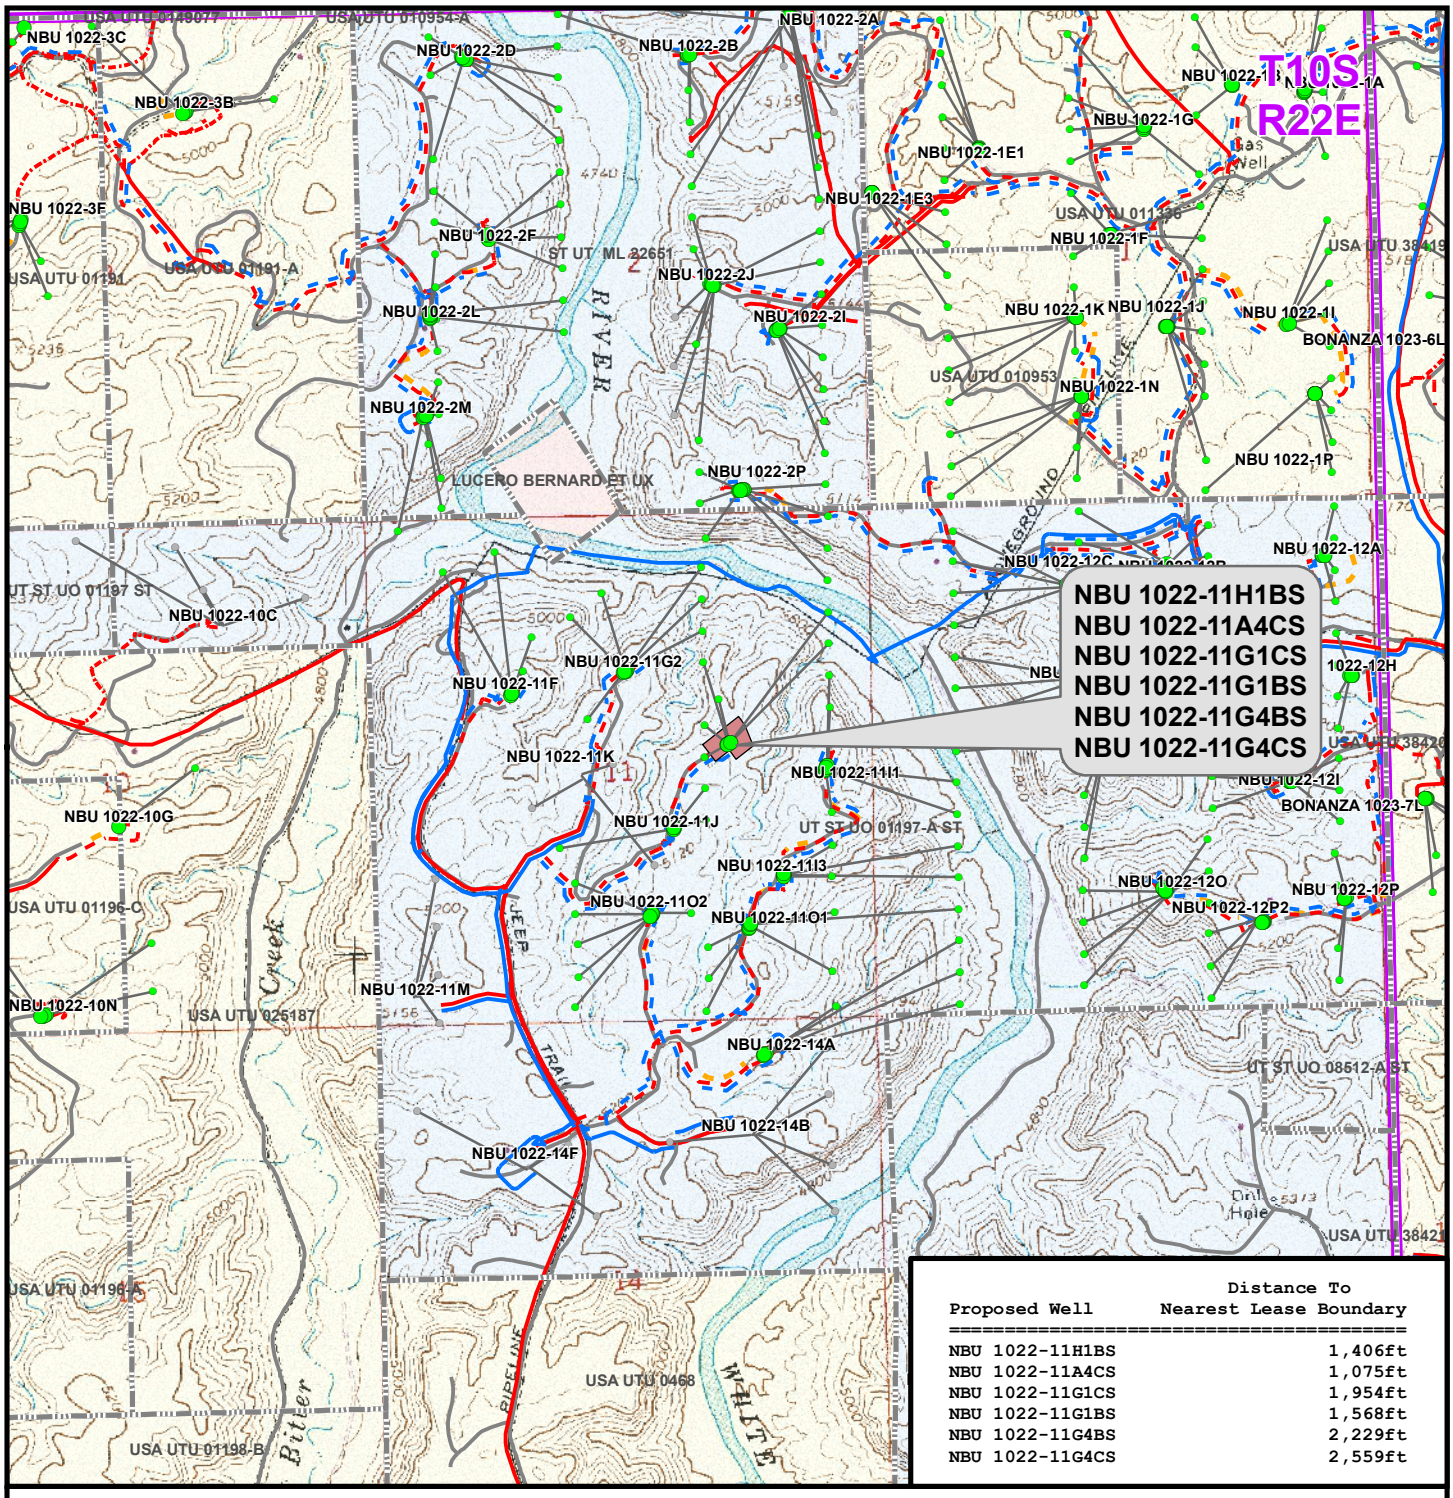

Proposed Well	Distance To Nearest Lease Boundary
NBU 1022-11H1BS	1,406ft
NBU 1022-11A4CS	1,075ft
NBU 1022-11G1CS	1,954ft
NBU 1022-11G1BS	1,568ft
NBU 1022-11G4BS	2,229ft
NBU 1022-11G4CS	2,559ft

Legend

- Well - Proposed
- Bottom Hole - Proposed
- Bottom Hole - Existing
- Well Path
- Well Pad
- Lease Boundary
- Gas Pipeline - Proposed
- Gas Pipeline - To Be Upgraded
- Gas Pipeline - Existing
- Liquid Pipeline - Proposed
- Liquid Pipeline - Existing
- Road - Proposed
- Road - Existing
- Bureau of Land Management
- Indian Reservation
- State
- Private

Kerr-McGee Oil & Gas Onshore, LP
1099 18th Street, Denver, Colorado 80202

WELL PAD - NBU 1022-11G4

TOPO E
NBU 1022-11H1BS, NBU 1022-11A4CS, NBU 1022-11G1CS, NBU 1022-11G1BS, NBU 1022-11G4BS & NBU 1022-11G4CS
LOCATED IN SECTION 11, T10S, R22E, S.L.B.&M., UINTAH COUNTY, UTAH

609 CONSULTING, LLC
2155 North Main Street
Sheridan, WY 82801
Phone (307) 674-0609
Fax (307) 674-0182

N

Scale: 1" = 2,000ft	NAD83 USP Central	Sheet No: 17	17 of 18
Drawn: TL	Date: 8 Feb 2011		
Revised:	Date:		

Kerr-McGee Oil & Gas Onshore, LP
WELL PAD - NBU 1022-11G4
WELLS – NBU 1022-11H1BS, NBU 1022-11A4CS,
NBU 1022-11G1CS, NBU 1022-11G1BS,
NBU 1022-11G4BS & NBU 1022-11G4CS
Section 11, T10S, R22E, S.L.B.&M.

From the intersection of U.S. Highway 40 and 500 East Street in Vernal, Utah, proceed in an easterly, then southerly direction along U.S. Highway 40 approximately 3.3 miles to the junction of State Highway 45. Exit right and proceed in a southerly direction along State Highway 45 approximately 20.2 miles to the junction of the Glen Bench Road (County B Road 3260). Exit right and proceed in a southwesterly direction along the Glen Bench Road approximately 23.8 miles to the intersection of the Bitter Creek Road (County B Road 4120). Exit left and proceed in a southeasterly direction along the Bitter Creek Road approximately 8.2 miles to the junction of the Bitter Creek Cut Off Road (County B Road 4140). Exit left and proceed in an easterly direction along the Bitter Creek Cut Off Road approximately 1.5 miles to the junction of the Archy Bench Road (County D Road 4150). Exit left and proceed in a northerly direction along the Archy Bench Road approximately 3.1 miles to a Class D County Road to the south. Exit right and proceed in a southerly, then northeasterly direction along the Class D County Road approximately 0.4 miles to the proposed NBU 1022-11J well pad. Continue through the NBU 1022-11J well pad approximately 425 feet in a northeasterly direction along the Class D County Road. Proceed in a northeasterly direction along the Class D County Road approximately 0.1 miles to the proposed well location.

Total distance from Vernal, Utah to the proposed well location is approximately 60.7 miles in a southerly direction.

RECEIVED: August 10, 2011

API Well Number: 43047518050000

Scientific Drilling
Rocky Mountain Operations

Project: Uintah County, UT UTM12
Site: NBU 1022-11G4 PAD
Well: NBU 1022-11A4CS
Wellbore: OH
Design: PLAN #1 5-13-11 RHS

Anadarko Petroleum Corporation

WELL DETAILS: NBU 1022-11A4CS

GL 5045 & KB 14 @ 5059.00ft (ASSUMED)

+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
0.00	0.00	14516986.13	2088043.81	39° 57' 50.814 N	109° 24' 9.133 W

DESIGN TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude	Shape
PBHL	8426.00	1335.24	1054.88	14518340.05	2089074.60	39° 58' 4.012 N	109° 23' 55.583 W	Circle (Radius: 25.00)

- plan hits target center



Azimuths to True North
Magnetic North: 11.04°

Magnetic Field
Strength: 52331.4snT
Dip Angle: 65.86°
Date: 05/13/2011
Model: IGRF2010

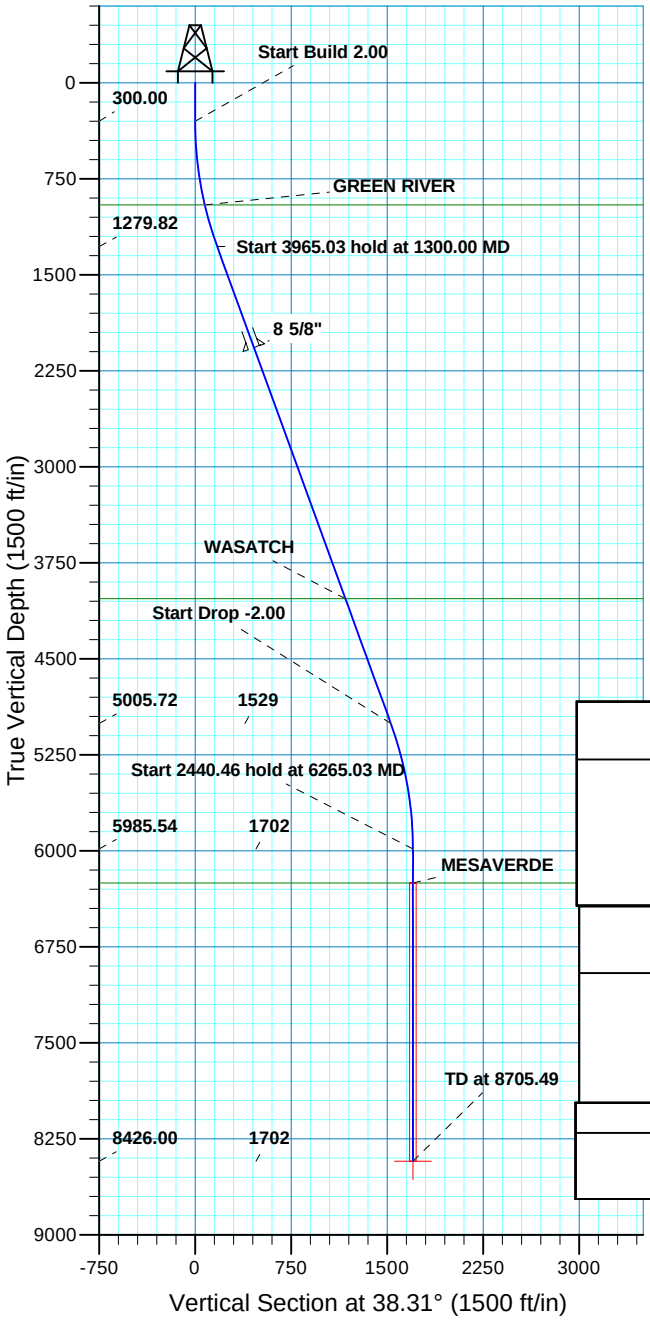

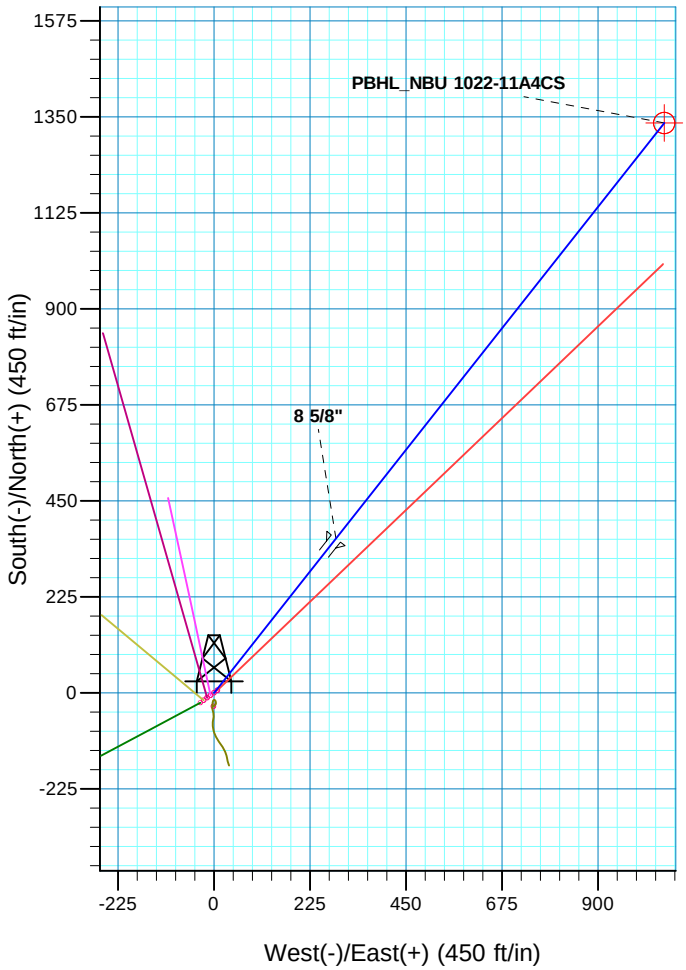

SECTION DETAILS

MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSect	
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	
1300.00	20.00	38.31	1279.82	135.57	107.10	2.00	38.31	172.77	
5265.03	20.00	38.31	5005.72	1199.67	947.78	0.00	0.00	1528.89	
6265.03	0.00	0.00	5985.54	1335.24	1054.88	2.00	180.00	1701.66	
8705.49	0.00	0.00	8426.00	1335.24	1054.88	0.00	0.00	1701.66	PBHL_NBU 1022-11A4CS

PROJECT DETAILS: Uintah County, UT UTM12

Geodetic System: Universal Transverse Mercator (US Survey Feet)
Datum: NAD 1927 - Western US
Ellipsoid: Clarke 1866
Zone: Zone 12N (114 W to 108 W)
Location: SECTION 11 T10S R22E
System Datum: Mean Sea Level

FORMATION TOP DETAILS

TVDPath	MDPath	Formation
955.00	960.85	GREEN RIVER
4031.00	4227.75	WASATCH
6252.00	6531.49	MESAVERDE

CASING DETAILS

TVD	MD	Name	Size
2070.00	2140.90	8 5/8"	8.625

RECE

Plan: PLAN #1 5-13-11 RHS (NBU 1022-11A4CS/OH)

Created By: RobertScott Date: 14:19, May 13 2011

Scientific Drilling
Rocky Mountain Operations

Kerr McGee Oil and Gas Onshore LP

Uintah County, UT UTM12
NBU 1022-11G4 PAD
NBU 1022-11A4CS

OH

Plan: PLAN #1 5-13-11 RHS

Standard Planning Report

13 May, 2011

Anadarko Petroleum Corporation

RECEIVED: August 10, 2011

Scientific Drilling
Rocky Mountain Operations

SDI
Planning Report

Anadarko Petroleum Corporation

Database:	EDM5000-RobertS-Local	**Local Co-ordinate Reference:**	Well NBU 1022-11A4CS
Company:	Kerr McGee Oil and Gas Onshore LP	**TVD Reference:**	GL 5045 & KB 14 @ 5059.00ft (ASSUMED)
Project:	Uintah County, UT UTM12	**MD Reference:**	GL 5045 & KB 14 @ 5059.00ft (ASSUMED)
Site:	NBU 1022-11G4 PAD	**North Reference:**	True
Well:	NBU 1022-11A4CS	**Survey Calculation Method:**	Minimum Curvature
Wellbore:	OH		
Design:	PLAN #1 5-13-11 RHS		

Project Uintah County, UT UTM12

Map System:	Universal Transverse Mercator (US Survey Feet)	**System Datum:**	Mean Sea Level
Geo Datum:	NAD 1927 - Western US		
Map Zone:	Zone 12N (114 W to 108 W)		

Site NBU 1022-11G4 PAD, SECTION 11 T10S R22E

Site Position:		**Northing:**	14,516,992.11 usft	**Latitude:**	39° 57' 50.872 N
From:	Lat/Long	**Easting:**	2,088,051.83 usft	**Longitude:**	109° 24' 9.029 W
Position Uncertainty:	0.00 ft	**Slot Radius:**	13.200 in	**Grid Convergence:**	1.03 °

Well NBU 1022-11A4CS, 2411 FNL 1535 FEL

Well Position	**+N/-S**	-5.83 ft	**Northing:**	14,516,986.13 usft	**Latitude:**	39° 57' 50.814 N
	+E/-W	-8.13 ft	**Easting:**	2,088,043.81 usft	**Longitude:**	109° 24' 9.133 W
Position Uncertainty		0.00 ft	**Wellhead Elevation:**		**Ground Level:**	5,045.00 ft

Wellbore OH

Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2010	05/13/2011	11.04	65.86	52,331

Design PLAN #1 5-13-11 RHS

Audit Notes:

Version:		**Phase:**	PLAN	**Tie On Depth:**	0.00

Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)
	0.00	0.00	0.00	38.31

Plan Sections

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00	
1,300.00	20.00	38.31	1,279.82	135.57	107.10	2.00	2.00	0.00	38.31	
5,265.03	20.00	38.31	5,005.72	1,199.67	947.78	0.00	0.00	0.00	0.00	
6,265.03	0.00	0.00	5,985.54	1,335.24	1,054.88	2.00	-2.00	0.00	180.00	
8,705.49	0.00	0.00	8,426.00	1,335.24	1,054.88	0.00	0.00	0.00	0.00	PBHL_NBU 1022-11A

RECEIVED: August 10, 2011

Scientific Drilling
Rocky Mountain Operations

SDI
Planning Report

Anadarko Petroleum Corporation

Database:	EDM5000-RobertS-Local	**Local Co-ordinate Reference:**	Well NBU 1022-11A4CS
Company:	Kerr McGee Oil and Gas Onshore LP	**TVD Reference:**	GL 5045 & KB 14 @ 5059.00ft (ASSUMED)
Project:	Uintah County, UT UTM12	**MD Reference:**	GL 5045 & KB 14 @ 5059.00ft (ASSUMED)
Site:	NBU 1022-11G4 PAD	**North Reference:**	True
Well:	NBU 1022-11A4CS	**Survey Calculation Method:**	Minimum Curvature
Wellbore:	OH		
Design:	PLAN #1 5-13-11 RHS		

Planned Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
Start Build 2.00									
400.00	2.00	38.31	399.98	1.37	1.08	1.75	2.00	2.00	0.00
500.00	4.00	38.31	499.84	5.48	4.33	6.98	2.00	2.00	0.00
600.00	6.00	38.31	599.45	12.31	9.73	15.69	2.00	2.00	0.00
700.00	8.00	38.31	698.70	21.88	17.28	27.88	2.00	2.00	0.00
800.00	10.00	38.31	797.47	34.15	26.98	43.52	2.00	2.00	0.00
900.00	12.00	38.31	895.62	49.12	38.81	62.60	2.00	2.00	0.00
960.85	13.22	38.31	955.00	59.54	47.04	75.88	2.00	2.00	0.00
GREEN RIVER									
1,000.00	14.00	38.31	993.06	66.77	52.75	85.10	2.00	2.00	0.00
1,100.00	16.00	38.31	1,089.64	87.08	68.80	110.98	2.00	2.00	0.00
1,200.00	18.00	38.31	1,185.27	110.02	86.92	140.21	2.00	2.00	0.00
1,300.00	20.00	38.31	1,279.82	135.57	107.10	172.77	2.00	2.00	0.00
Start 3965.03 hold at 1300.00 MD									
1,400.00	20.00	38.31	1,373.78	162.40	128.30	206.97	0.00	0.00	0.00
1,500.00	20.00	38.31	1,467.75	189.24	149.51	241.17	0.00	0.00	0.00
1,600.00	20.00	38.31	1,561.72	216.08	170.71	275.37	0.00	0.00	0.00
1,700.00	20.00	38.31	1,655.69	242.92	191.91	309.58	0.00	0.00	0.00
1,800.00	20.00	38.31	1,749.66	269.75	213.11	343.78	0.00	0.00	0.00
1,900.00	20.00	38.31	1,843.63	296.59	234.31	377.98	0.00	0.00	0.00
2,000.00	20.00	38.31	1,937.60	323.43	255.52	412.18	0.00	0.00	0.00
2,100.00	20.00	38.31	2,031.57	350.26	276.72	446.38	0.00	0.00	0.00
2,140.90	20.00	38.31	2,070.00	361.24	285.39	460.37	0.00	0.00	0.00
8 5/8"									
2,200.00	20.00	38.31	2,125.54	377.10	297.92	480.59	0.00	0.00	0.00
2,300.00	20.00	38.31	2,219.51	403.94	319.12	514.79	0.00	0.00	0.00
2,400.00	20.00	38.31	2,313.48	430.78	340.33	548.99	0.00	0.00	0.00
2,500.00	20.00	38.31	2,407.45	457.61	361.53	583.19	0.00	0.00	0.00
2,600.00	20.00	38.31	2,501.42	484.45	382.73	617.39	0.00	0.00	0.00
2,700.00	20.00	38.31	2,595.39	511.29	403.93	651.60	0.00	0.00	0.00
2,800.00	20.00	38.31	2,689.35	538.13	425.14	685.80	0.00	0.00	0.00
2,900.00	20.00	38.31	2,783.32	564.96	446.34	720.00	0.00	0.00	0.00
3,000.00	20.00	38.31	2,877.29	591.80	467.54	754.20	0.00	0.00	0.00
3,100.00	20.00	38.31	2,971.26	618.64	488.74	788.40	0.00	0.00	0.00
3,200.00	20.00	38.31	3,065.23	645.47	509.94	822.61	0.00	0.00	0.00
3,300.00	20.00	38.31	3,159.20	672.31	531.15	856.81	0.00	0.00	0.00
3,400.00	20.00	38.31	3,253.17	699.15	552.35	891.01	0.00	0.00	0.00
3,500.00	20.00	38.31	3,347.14	725.99	573.55	925.21	0.00	0.00	0.00
3,600.00	20.00	38.31	3,441.11	752.82	594.75	959.41	0.00	0.00	0.00
3,700.00	20.00	38.31	3,535.08	779.66	615.96	993.62	0.00	0.00	0.00
3,800.00	20.00	38.31	3,629.05	806.50	637.16	1,027.82	0.00	0.00	0.00
3,900.00	20.00	38.31	3,723.02	833.34	658.36	1,062.02	0.00	0.00	0.00
4,000.00	20.00	38.31	3,816.99	860.17	679.56	1,096.22	0.00	0.00	0.00
4,100.00	20.00	38.31	3,910.95	887.01	700.77	1,130.42	0.00	0.00	0.00
4,200.00	20.00	38.31	4,004.92	913.85	721.97	1,164.63	0.00	0.00	0.00
4,227.75	20.00	38.31	4,031.00	921.29	727.85	1,174.12	0.00	0.00	0.00
WASATCH									

Scientific Drilling
Rocky Mountain Operations

SDI
Planning Report

Anadarko Petroleum Corporation

Database:	EDM5000-RobertS-Local	**Local Co-ordinate Reference:**	Well NBU 1022-11A4CS
Company:	Kerr McGee Oil and Gas Onshore LP	**TVD Reference:**	GL 5045 & KB 14 @ 5059.00ft (ASSUMED)
Project:	Uintah County, UT UTM12	**MD Reference:**	GL 5045 & KB 14 @ 5059.00ft (ASSUMED)
Site:	NBU 1022-11G4 PAD	**North Reference:**	True
Well:	NBU 1022-11A4CS	**Survey Calculation Method:**	Minimum Curvature
Wellbore:	OH		
Design:	PLAN #1 5-13-11 RHS		

Planned Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
4,300.00	20.00	38.31	4,098.89	940.68	743.17	1,198.83	0.00	0.00	0.00
4,400.00	20.00	38.31	4,192.86	967.52	764.37	1,233.03	0.00	0.00	0.00
4,500.00	20.00	38.31	4,286.83	994.36	785.57	1,267.23	0.00	0.00	0.00
4,600.00	20.00	38.31	4,380.80	1,021.20	806.78	1,301.43	0.00	0.00	0.00
4,700.00	20.00	38.31	4,474.77	1,048.03	827.98	1,335.64	0.00	0.00	0.00
4,800.00	20.00	38.31	4,568.74	1,074.87	849.18	1,369.84	0.00	0.00	0.00
4,900.00	20.00	38.31	4,662.71	1,101.71	870.38	1,404.04	0.00	0.00	0.00
5,000.00	20.00	38.31	4,756.68	1,128.55	891.59	1,438.24	0.00	0.00	0.00
5,100.00	20.00	38.31	4,850.65	1,155.38	912.79	1,472.44	0.00	0.00	0.00
5,200.00	20.00	38.31	4,944.62	1,182.22	933.99	1,506.65	0.00	0.00	0.00
5,265.03	20.00	38.31	5,005.72	1,199.67	947.78	1,528.89	0.00	0.00	0.00
Start Drop -2.00									
5,300.00	19.30	38.31	5,038.66	1,208.90	955.07	1,540.65	2.00	-2.00	0.00
5,400.00	17.30	38.31	5,133.60	1,233.54	974.53	1,572.05	2.00	-2.00	0.00
5,500.00	15.30	38.31	5,229.57	1,255.56	991.93	1,600.11	2.00	-2.00	0.00
5,600.00	13.30	38.31	5,326.47	1,274.94	1,007.24	1,624.81	2.00	-2.00	0.00
5,700.00	11.30	38.31	5,424.17	1,291.66	1,020.45	1,646.12	2.00	-2.00	0.00
5,800.00	9.30	38.31	5,522.55	1,305.69	1,031.53	1,664.00	2.00	-2.00	0.00
5,900.00	7.30	38.31	5,621.50	1,317.01	1,040.48	1,678.43	2.00	-2.00	0.00
6,000.00	5.30	38.31	5,720.89	1,325.63	1,047.29	1,689.41	2.00	-2.00	0.00
6,100.00	3.30	38.31	5,820.60	1,331.51	1,051.93	1,696.90	2.00	-2.00	0.00
6,200.00	1.30	38.31	5,920.52	1,334.66	1,054.42	1,700.92	2.00	-2.00	0.00
6,265.03	0.00	0.00	5,985.54	1,335.24	1,054.88	1,701.66	2.00	-2.00	0.00
Start 2440.46 hold at 6265.03 MD									
6,300.00	0.00	0.00	6,020.51	1,335.24	1,054.88	1,701.66	0.00	0.00	0.00
6,400.00	0.00	0.00	6,120.51	1,335.24	1,054.88	1,701.66	0.00	0.00	0.00
6,500.00	0.00	0.00	6,220.51	1,335.24	1,054.88	1,701.66	0.00	0.00	0.00
6,531.49	0.00	0.00	6,252.00	1,335.24	1,054.88	1,701.66	0.00	0.00	0.00
MESAVERDE									
6,600.00	0.00	0.00	6,320.51	1,335.24	1,054.88	1,701.66	0.00	0.00	0.00
6,700.00	0.00	0.00	6,420.51	1,335.24	1,054.88	1,701.66	0.00	0.00	0.00
6,800.00	0.00	0.00	6,520.51	1,335.24	1,054.88	1,701.66	0.00	0.00	0.00
6,900.00	0.00	0.00	6,620.51	1,335.24	1,054.88	1,701.66	0.00	0.00	0.00
7,000.00	0.00	0.00	6,720.51	1,335.24	1,054.88	1,701.66	0.00	0.00	0.00
7,100.00	0.00	0.00	6,820.51	1,335.24	1,054.88	1,701.66	0.00	0.00	0.00
7,200.00	0.00	0.00	6,920.51	1,335.24	1,054.88	1,701.66	0.00	0.00	0.00
7,300.00	0.00	0.00	7,020.51	1,335.24	1,054.88	1,701.66	0.00	0.00	0.00
7,400.00	0.00	0.00	7,120.51	1,335.24	1,054.88	1,701.66	0.00	0.00	0.00
7,500.00	0.00	0.00	7,220.51	1,335.24	1,054.88	1,701.66	0.00	0.00	0.00
7,600.00	0.00	0.00	7,320.51	1,335.24	1,054.88	1,701.66	0.00	0.00	0.00
7,700.00	0.00	0.00	7,420.51	1,335.24	1,054.88	1,701.66	0.00	0.00	0.00
7,800.00	0.00	0.00	7,520.51	1,335.24	1,054.88	1,701.66	0.00	0.00	0.00
7,900.00	0.00	0.00	7,620.51	1,335.24	1,054.88	1,701.66	0.00	0.00	0.00
8,000.00	0.00	0.00	7,720.51	1,335.24	1,054.88	1,701.66	0.00	0.00	0.00
8,100.00	0.00	0.00	7,820.51	1,335.24	1,054.88	1,701.66	0.00	0.00	0.00
8,200.00	0.00	0.00	7,920.51	1,335.24	1,054.88	1,701.66	0.00	0.00	0.00
8,300.00	0.00	0.00	8,020.51	1,335.24	1,054.88	1,701.66	0.00	0.00	0.00
8,400.00	0.00	0.00	8,120.51	1,335.24	1,054.88	1,701.66	0.00	0.00	0.00
8,500.00	0.00	0.00	8,220.51	1,335.24	1,054.88	1,701.66	0.00	0.00	0.00
8,600.00	0.00	0.00	8,320.51	1,335.24	1,054.88	1,701.66	0.00	0.00	0.00
8,700.00	0.00	0.00	8,420.51	1,335.24	1,054.88	1,701.66	0.00	0.00	0.00
8,705.49	0.00	0.00	8,426.00	1,335.24	1,054.88	1,701.66	0.00	0.00	0.00

Scientific Drilling
Rocky Mountain Operations

SDI
Planning Report

Anadarko Petroleum Corporation

Database:	EDM5000-RobertS-Local	**Local Co-ordinate Reference:**	Well NBU 1022-11A4CS
Company:	Kerr McGee Oil and Gas Onshore LP	**TVD Reference:**	GL 5045 & KB 14 @ 5059.00ft (ASSUMED)
Project:	Uintah County, UT UTM12	**MD Reference:**	GL 5045 & KB 14 @ 5059.00ft (ASSUMED)
Site:	NBU 1022-11G4 PAD	**North Reference:**	True
Well:	NBU 1022-11A4CS	**Survey Calculation Method:**	Minimum Curvature
Wellbore:	OH		
Design:	PLAN #1 5-13-11 RHS		

Planned Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
PBHL_NBU 1022-11A4CS									

Design Targets

Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (ft)	+N/-S (ft)	+E/-W (ft)	Northing (usft)	Easting (usft)	Latitude	Longitude
PBHL_NBU 1022-11A4(- plan hits target center - Circle (radius 25.00)	0.00	0.00	8,426.00	1,335.24	1,054.88	14,518,340.05	2,089,074.60	39° 58' 4.012 N	109° 23' 55.583 W

Casing Points

Measured Depth (ft)	Vertical Depth (ft)	Name	Casing Diameter (in)	Hole Diameter (in)
2,140.90	2,070.00	8 5/8"	8.625	11.000

Formations

Measured Depth (ft)	Vertical Depth (ft)	Name	Lithology	Dip (°)	Dip Direction (°)
960.85	955.00	GREEN RIVER			
4,227.75	4,031.00	WASATCH			
6,531.49	6,252.00	MESAVERDE			

Plan Annotations

Measured Depth (ft)	Vertical Depth (ft)	Local Coordinates +N/-S (ft)	Local Coordinates +E/-W (ft)	Comment
300.00	300.00	0.00	0.00	Start Build 2.00
1,300.00	1,279.82	135.57	107.10	Start 3965.03 hold at 1300.00 MD
5,265.03	5,005.72	1,199.67	947.78	Start Drop -2.00
6,265.03	5,985.54	1,335.24	1,054.88	Start 2440.46 hold at 6265.03 MD
8,705.49	8,426.00	1,335.24	1,054.88	TD at 8705.49

	NBU 1022-11A4CS		
Surface:	2411 FNL / 1535 FEL	SWNE	Lot
BHL:	1075 FNL / 490 FEL	NENE	Lot
	NBU 1022-11G1BS		
Surface:	2423 FNL / 1550 FEL	SWNE	Lot
BHL:	1568 FNL / 1802 FEL	SWNE	Lot
	NBU 1022-11G1CS		
Surface:	2417 FNL / 1542 FEL	SWNE	Lot
BHL:	1954 FNL / 1646 FEL	SWNE	Lot
	NBU 1022-11G4BS		
Surface:	2429 FNL / 1558 FEL	SWNE	Lot
BHL:	2229 FNL / 1800 FEL	SWNE	Lot
	NBU 1022-11G4CS		
Surface:	2435 FNL / 1566 FEL	SWNE	Lot
BHL:	2559 FNL / 1799 FEL	SWNE	Lot
	NBU 1022-11H1BS		
Surface:	2405 FNL / 1526 FEL	SWNE	Lot
BHL:	1406 FNL / 490 FEL	SENE	Lot

Pad: 1022-11G4 PAD
Section 11 T10S R22E
Mineral Lease: UO1197A-ST

Uintah County, Utah
Operator: Kerr-McGee Oil & Gas Onshore LP

This SUPO contains surface operating procedures for Kerr-McGee Oil & Gas Onshore LP (KMG), a wholly owned subsidiary of Anadarko Petroleum Corporation (APC) pertaining to actions that involve the State of Utah School and Institutional Trust Lands Administration (SITLA) in the development of minerals leased to APC/KMG (including but not limited to, APDs/SULAs/ROEs/ROWs and/or easements.)

See associated Utah Division of Oil, Gas, and Mining (UDOGM) Form 3(s), plats, maps, and other attachments for site-specific information on projects represented herein.

In accordance with Utah Oil & Gas Conservation Rule R649-3-11 pertaining to Directional Drilling, these wells will be directionally drilled. Refer to Topo Map A for directions to the location and Topo Maps A and B for location of access roads within a 2-mile radius.

A. Existing Roads:

Existing roads consist of county and improved/unimproved lease roads. KMG will maintain existing roads in a condition that is the same as or better than before operations began and in a safe and usable condition. Maintenance of existing roads will continue until final abandonment and reclamation of well pads and/or other facilities. The road maintenance may include, but is not limited to, blading, ditching, culvert installation/cleanout, surfacing, and dust control.

Typically, roads, gathering lines and electrical distribution lines will occupy common disturbance corridors and roadways will be used as working space. All disturbances located in the same corridor will overlap each other to the maximum extent possible; in no case will the maximum disturbance width of the access road and utility corridors exceed 50', unless otherwise approved.

RECEIVED: August 10, 2011

B. Planned Access Roads:

No new access road is proposed.

If there are roads that are new or to be reconstructed, they will be located, designed, and maintained to meet the standards of SITLA and other commonly accepted Best Management Practices (BMPs). If a new road/corridor were to cross a water of the United States, KMG will adhere to the requirements of applicable Nationwide or Individual Permits of the Department of Army Corps of Engineers.

During the onsite, turnouts, major cut and fills, culverts, bridges, gates, cattle guards, low water crossings, or modifications needed to existing infrastructure/facilities were determined, as applicable, are typically shown on attached Exhibits and Topo maps.

C. Location of Existing and Proposed Facilities:

This pad will expand the existing pad for the NBU 272. The NBU 272 well location is a vertical producing well according to Utah Division of Oil, Gas and Mining (UDOGM) records as of August 5, 2011.

Production facilities (see Well Pad Design Summary and Facilities Diagram):

Production facilities will be installed on the disturbed portion of the well pad and may include bermed components (typically excluding dehy's and/or separators) that contain fluids (i.e. production tanks, produced liquids tanks). The berms will be constructed of compacted subsoil or corrugated metal, impervious, designed to hold 110% of the capacity of the largest tank, and be independent of the back cut. All permanent (on-site six months or longer) above ground structures constructed or installed, including pumping units, will be painted a flat, non-reflective, earth-tone color chosen at the onsite in coordination with SITLA.

Gathering Facilities:

The following pipeline transmission facilities will apply if the well is productive (see Topo D):

The total gas gathering (steel line pipe with fusion bond epoxy coating) pipeline distances from the meter to the tie in point is ±1,630' and the individual segments are broken up as follows:

±490' (0.09 miles) –New 6" buried gas pipeline from the meter to the edge of the pad. Please refer to Topo D2 - Pad and Pipeline Detail.
±1,140' (0.22 miles) –New 6" buried gas pipeline from the edge of pad to the tie-in at the proposed NBU 1022-11J Intersection 8" gas pipeline. Please refer to Topo D2 - Pad and Pipeline Detail.

The total liquid gathering pipeline distance from the separator to the tie in point is ±1,630'and the individual segments are broken up as follows:

±490' (0.09 miles) –New 6" (max) buried liquid pipeline from the separator to the edge of the pad. Please refer to Topo D2 - Pad and Pipeline Detail.
±1,140' (0.22 miles) –New 6" (max) buried liquid pipeline from the edge of pad to the tie-in at the proposed NBU 1022-11J Intersection. Please refer to Topo D2 - Pad and Pipeline Detail.

The liquid gathering lines will be made of polyethylene or a composite polyethylene/steel or polyethylene/fiberglass that is not subject to internal or external pipe corrosion. The content of the produced fluids to be transferred by the liquid gathering system will be approximately 92% produced water and 8% condensate. Trunk line valve connections for the water gathering system will be below ground but accessible from the surface in order to prevent freezing during winter time.

The proposed pipelines will be buried and will include gas gathering and liquid gathering pipelines in the same trench. Where the pipeline is adjacent to the road or well pad, the road and/or well pad will be utilized for construction activities and staging. KMG requests a permanent 30' right-of-way adjacent to the road for life-of-project for maintenance, repairs, and/or upgrades, no additional right-of-way will be needed beyond the 30'. Where the pipeline is not adjacent to the road or well pad, KMG requests a temporary 45' construction right-of-way 30' permanent right-of-way.

RECEIVED: August 10, 2011

The proposed trench width for the pipeline would range from 18-48 inches and will be excavated to a depth of 48 to 60 inches of normal soil cover or 24 inches of cover in consolidated rock. During construction blasting may occur along the proposed right-of-way where trenching equipment cannot cut into the bedrock. Large debris and rocks removed from the earth during trenching and blasting that could not be returned to the trench would be distributed evenly and naturally in the project area. The proposed pipelines will be pressure tested pneumatically (depending on size) or with fluids (either fresh or produced). If fluids are used, there will be no discharge to the surface.

Pipeline signs will be installed along the right-of-way to indicate the pipeline proximity and ownership, as well as to provide emergency contact phone numbers. Above ground valves, T's, and/or cathodic protection will be installed at various locations for connection, corrosion prevention and/or for safety purposes.

D. Location and Type of Water Supply:

Water for drilling purposes will be obtained from one of the following sources:

- Dalbo Inc.'s underground well located in Ouray, Utah, Sec. 32 T4S R3E, Water User Claim number 43-8496, application number 53617.
- Price Water Pumping Inc. Green River and White River, various sources, Water Right Number 49-1659, application number: a35745.

Water will be hauled to location over the roads marked on Maps A and B.

No water well is to be drilled on this lease.

E. Source of Construction Materials:

Construction operations will typically be completed with native materials found on location. If needed, construction materials that must be imported to the site (mineral material aggregate, soils or materials suitable for fill/surfacing) will be obtained from a nearby permitted source and described in subsequent Sundry requests. No construction materials will be removed from State lands without prior approval from SITLA.

F. Methods for Handling Waste Materials:

Should the well be productive, produced water will be contained in a water tank and will be transported by pipeline and/or truck to an approved disposal sites facilities and/or Salt Water Disposal (SWD) injection well. Currently, those facilities are:

RNI in Sec. 5 T9S R22E
Ace Oilfield in Sec. 2 T6S R20E
MC&MC in Sec. 12 T6S R19E
Pipeline Facility in Sec. 36 T9S R20E
Goat Pasture Evaporation Pond in SW/4 Sec. 16 T10S R22E
Bonanza Evaporation Pond in Sec. 2 T10S R23E
Ouray #1 SWD in Sec. 1 T9S R21E
NBU 159 SWD in Sec. 35 T9S R21E
CIGE 112D SWD in Sec. 19 T9S R21E
CIGE 114 SWD in Sec. 34 T9S R21E
NBU 921-34K SWD in Sec. 34 T9S R21E
NBU 921-33F SWD in Sec. 33 T9S R21E
NBU 921-34L SWD in Sec. 34 T9S R21E

Drill cuttings and/or fluids will be contained in the reserve/frac pit. Cuttings will be buried in pit(s) upon closure. Unless otherwise approved, no oil or other oil-based drilling additives, chromium/metals-based, or saline muds will be used during drilling. Only fresh water (as specified above), biodegradable polymer soap, bentonite clay, and/or non-toxic additives will be used in the mud system.

Pits will be constructed to minimize the accumulation of surface runoff. Should fluid hydrocarbons be encountered during drilling, completions or well testing, product will either be contained in test tanks on the well site or evacuated by vacuum trucks and transported to an approved disposal/sales facility. Should petroleum hydrocarbons unexpectedly be released into a pit, they will be removed as soon as practical but in no case will they remain longer than 72 hours unless an alternate is approved by SITLA. Should timely removal prove infeasible, the pit will be netted with mesh no larger than 1 inch until such time as hydrocarbons can be removed. Hydrocarbon removal will also take place prior to the closure of the pit, unless authorization is provided for disposal via alternative pit closure methods (e.g. solidification.)

RECEIVED: August 10, 2011

The reserve and/or fracture stimulation pit will be lined with a synthetic material 20 mil or thicker, The liner will be installed over smooth fill subgrade that is free of pockets, loose rocks, or other materials (i.e. sand, sifted dirt, bentonite, straw, etc.) that could damage the liner. Any additional pits necessary for subsequent operations, such as temporary flare or workover pits, will be contained within the originally approved well pad and disturbance boundaries. Such temporary pits will be backfilled and reclaimed within 180 days of completion of work at a well location.

For the protection of livestock and wildlife, all open pits and cellars will be fenced/covered to prevent wildlife or livestock entry. Total height of pit fencing will be at least 42 inches and corner posts will be cemented and/or braced in such a manner as to keep the fence tight at all times. Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distance between any 2 fence posts shall be no greater than 16 feet.

Pits containing drilling cuttings, mud, and/or completions fluids will be allowed to dry. Any free fluids remaining after after six (6) months from reaching total depth, date of completion, and/or determination of inactivity will be removed (as weather conditions allow) to an approved site and the pit reclaimed. Additional drying methods may include fly-ash solidification or sprinkler evaporation. Installation and operation of any sprinklers, pumps, and equipment will ensure that water spray or mist does not drift. Reserve pit liners will be cut off or folded as near to the mud surface as possible and as safety considerations allow and buried on location.

No garbage or non-exempt substances as defined by Resource Conservation and Recovery Act (RCRA) subtitle C will be placed in the reserve pit. All refuse generated during construction, drilling, completion, and well testing activities will be contained in an enclosed receptacle, removed from the drill locations promptly, and transported to an approved disposal facility.

Portable, self-contained chemical toilets and/or sewage processing facilities will be provided for human waste disposal. Upon completion of operations, or as required, the toilet holding tanks will be pumped and the contents disposed of in an approved sewage disposal facility. All applicable regulations pertaining to disposal of human and solid waste will be observed.

Any undesirable event, including accidental release of fluids, or release in excess of reportable quantities, will be managed according to the notification requirements of UDOGMs “Reporting Oil and Gas Undesirable Events” rule. Where State wells are participatory to a Federal agreement, according to NTL-3A, the appropriate Federal agencies will be notified.

Materials Management

Hazardous materials above reportable quantities will not be produced by drilling or completing proposed wells or constructing the pipelines/facilities. The term “hazardous materials” as used here means: (1) any substance, pollutant, or containment listed as hazardous under the Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA) of 1980, as amended 42 U.S.C. 9601 et seq., and the regulations issued under CERCLA; and (2) any hazardous waste as defined in RCRA of 1976, as amended. In addition, no extremely hazardous substance, as defined in 40 CFR 355, in threshold planning quantities, would be used, produced, stored, transported, or disposed of while producing any well.

Chemicals subject to reporting under Title III of the Superfund Amendments and Reauthorization Act (SARA) in quantities of 10,000 pounds or more may be produced and/or stored at production facilities and may be kept in limited quantities on drilling sites and well locations for short periods of time during drilling or completion activities.

G. Ancillary Facilities:

None are anticipated.

H. Well Site Layout (see Well Pad Design Summary):

The location, orientation and aerial extent of each drill pad; reserve/completion/flare pit; access road ingress/egress points, drilling rig, dikes/ditches, existing wells/infrastructure; proposed cuts and fills; and topsoil and spoil material stockpile locations are depicted on the exhibits for each project, where applicable. Site-specific conditions may require slight deviation in actual equipment and facility layout; however, the area of disturbance, as described in the survey, will not be exceeded.

Coordinates are provided in the National Spatial Reference System, North American Datum, 1927 (NAD27) or latest edition. Distances are depicted on each plat to the nearest two adjacent section lines.

RECEIVED: August 10, 2011

I. Plans for Reclamation of the Surface:

Surface reclamation will be undertaken in two phases: interim and final. Interim reclamation is conducted following well completion and extends through the period of production. This reclamation is for the area of the well pad that is not required for production activities. Final reclamation is conducted following well plugging/conversion and/or facility abandonment processes.

Reclamation activities in both phases may include but is not limited to the re-contouring or re-configuration of topographic surfaces, restoration of drainage systems, segregation of spoils materials, minimizing surface disturbance, re-evaluating backfill requirements, pit closure, topsoil redistribution, soil treatments, seeding and weed control.

Interim Reclamation

Interim reclamation includes pit closure, re-contouring (where possible), soil bed preparation, topsoil placement, seeding, and/or weed control.

Interim re-contouring involves bringing all construction material from cuts and fills back onto the well pad and site and reestablishing the natural contours where desirable and practical. Fill and stockpiled spoils no longer necessary to the operation will be spread on the cut slopes and covered with stockpiled topsoil. All stockpiled top soils will be used for interim reclamation where practical to maintain soil viability. Where possible, the land surface will be left “rough” after re-contouring to ensure that the maximum surface area will be available to support the reestablishment of vegetative cover.

A reserve pit, upon being allowed to dry, will be backfilled and compacted with cover materials that are void of any topsoil, vegetation, large stones, rocks or foreign objects. Soils that are moisture laden, saturated, or partially/completely frozen will not be used for backfill or cover. The pit area will be mounded to allow for settling and to promote positive surface drainage away from the pit.

Final Reclamation

Final reclamation will be performed for newly drilled unproductive wells and/or at the end of the life of a productive well. As soon as practical after the conclusion of drilling and testing operations, unproductive drill holes will be plugged and abandoned (P&A). Site and road reclamation will commence following plugging. In no case will reclamation at non-producing locations be initiated later than six (6) months from the date a well is plugged. A joint inspection of the disturbed area to be reclaimed may be requested by KMG. The primary purpose of this inspection will be to review the existing conditions, or agree upon a revised final reclamation and abandonment plan. A Notice of Intent to Abandon will be filed for final recommendations regarding surface reclamation.

After plugging, all wellhead equipment that is no longer needed will be removed, and the well site will be reclaimed. Final contouring will blend with and follow as closely as practical the natural terrain and contours of the original site and surrounding areas. After re-contouring, final grading will be conducted over the entire surface of the well site and access road. Where practical, the area will be ripped to a depth of 18 to 24 inches on 18 to 24-inch centers and surface materials will be pitted with small depressions to form longitudinal depressions 12 to 18 inches deep perpendicular to the natural flow of water.

All unnecessary surface equipment and structures (e.g. cattle guards) and water control structures (e.g. culverts, drainage pipes) not needed to facilitate successful reclamation will be removed during final reclamation. Roads that will be reclaimed will be ripped to a depth of 18 inches where practical, re-contoured to approximate the original contour of the ground and seeded.

Upon successfully completing reclamation of a P&A location, a Final Abandonment Notice will be submitted to UDOGM.

Seeding and Measures Common to Interim and Final Reclamation

Reclaimed areas may be fenced to exclude grazing and encourage re-vegetation.

On slopes where severe erosion can become a problem and the use of machinery is not practical, seed will be hand broadcast and raked with twice the specified amount of seed. The slope will be stabilized using materials specifically designed to prevent erosion on steep slopes and hold seed in place so vegetation can become permanently established. These materials will include, but are not limited to, erosion control blankets and bonded fiber matrix at a rate to achieve a minimum of 80 percent soil coverage.

Seeding will occur year-round as conditions allow. Seed mixes appropriate to the native plant community as determined and specified for each project location based on the site specific soils will be used for re-vegetation. The site specific seed mix will be provided by SITLA.

RECEIVED: August 10, 2011

J. Surface/Mineral Ownership:

SITLA
675 East 500 South, Suite 500
Salt Lake City, UT 84102

L. Other Information:

None

M. Lessee's or Operators' Representative & Certification:

Andy Lytle
Regulatory Analyst I
Kerr-McGee Oil & Gas Onshore LP
PO Box 173779
Denver, CO 80217-3779
(720) 929-6100

Tommy Thompson
General Manager, Drilling
Kerr-McGee Oil & Gas Onshore LP
PO Box 173779
Denver, CO 80217-3779
(720) 929-6724

Certification: All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approved Plan of Operations, and any applicable Notice to Lessees.

The Operator will be fully responsible for the actions of its subcontractors. A complete copy of the approved "Application for Permit to Drill" will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.

Kerr-McGee Oil & Gas Onshore LPis considered to be the operator of the subject well. Kerr-McGee Oil & Gas Onshore LP agrees to be responsible under terms and conditions of the lease for the operations conducted upon leased lands.

Bond coverage for State lease activities is provided by State Surety Bond 22013542, and for applicable Federal lease activities and pursuant to 43 CFR 3104, by Bureau of Land Management Nationwide Bond WYB000291.

I hereby certify that I, or persons under my supervision, have inspected the proposed drill site and access route, that I am familiar with the conditions that currently exist; that I have full knowledge of the State and Federal laws applicable to this operation; that the statements made in this plan are, to the best of my knowledge, true and correct; and the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or the company I represent, am responsible for operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements.

Andy Lytle

August 5, 2011
Date

JOSEPH D. JOHNSON
LANDMAN

Joseph D. Johnson
1099 18TH STREET STE. 1800 • DENVER, CO 80202
720-929-6708 • FAX 720-929-7708
E-MAIL: JOE.JOHNSON@ANADARKO.COM

August 5, 2011

Ms. Diana Mason
Division of Oil, Gas and Mining
P.O. Box 145801
Salt Lake City, UT 84114-6100

Re: Directional Drilling R649-3-11
NBU 1022-11A4CS
T10S-R22E
Section 11: SWNE
Surface: 2411' FNL, 1535' FEL
T10S-R22E
Section 11: NENE
Bottom Hole: 1075' FNL, 490' FEL
Uintah County, Utah

Dear Ms. Mason:

Pursuant to the filing of Kerr-McGee Oil & Gas Onshore LP's (Kerr-McGee) Application for Permit to Drill regarding the above referenced well, we are hereby submitting this letter in accordance with Oil & Gas Conservation Rule R649-3-11 pertaining to the Exception to Location and Siting of Wells.

- Kerr-McGee's NBU 1022-11A4CS is located within the Natural Buttes Unit area.
- Kerr-McGee is permitting this well as a directional well in order to minimize surface disturbance. Locating the well at the surface location and directionally drilling from this location, Kerr-McGee will be able to utilize the existing road and pipelines in the area.
- Furthermore, Kerr-McGee certifies that it is the sole working interest owner within 460 feet of the entire directional well bore.

Therefore, based on the above stated information Kerr-McGee Oil & Gas Onshore LP requests the permit be granted pursuant to R649-3-11.

Sincerely,

KERR-MCGEE OIL & GAS ONSHORE LP

Joseph D. Johnson
Landman

RECEIVED: August 10, 2011

United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, Utah 84145-0155

IN REPLY REFER TO:
3160
(UT-922)

August 19, 2011

Memorandum

To: Assistant District Manager Minerals, Vernal District

From: Michael Coulthard, Petroleum Engineer

Subject: 2011 Plan of Development Natural Buttes Unit
Uintah County, Utah.

Pursuant to email between Diana Whitney, Division of Oil, Gas and Mining, and Mickey Coulthard, Utah State Office, Bureau of Land Management, the following wells are planned for calendar year 2011 within the Natural Buttes Unit, Uintah County, Utah.

API #	WELL NAME	LOCATION
(Proposed PZ WASATCH-MESA VERDE)		
NBU 1022-11F PAD		
43-047-51797	NBU 1022-11C2CS	Sec 11 T10S R22E 1860 FNL 1499 FWL BHL Sec 11 T10S R22E 0370 FNL 1365 FWL
43-047-51799	NBU 1022-11C3DS	Sec 11 T10S R22E 1852 FNL 1505 FWL BHL Sec 11 T10S R22E 1268 FNL 1726 FWL
43-047-51800	NBU 1022-11D1CS	Sec 11 T10S R22E 1868 FNL 1493 FWL BHL Sec 11 T10S R22E 0576 FNL 0818 FWL
43-047-51801	NBU 1022-11F2DS	Sec 11 T10S R22E 1844 FNL 1512 FWL BHL Sec 11 T10S R22E 1622 FNL 1625 FWL
NBU 1022-11G2 PAD		
43-047-51802	NBU 1022-11B4CS	Sec 11 T10S R22E 1627 FNL 2594 FEL BHL Sec 11 T10S R22E 1238 FNL 1803 FEL
43-047-51813	NBU 1022-11B4BS	Sec 11 T10S R22E 1633 FNL 2601 FEL BHL Sec 11 T10S R22E 0908 FNL 1804 FEL
43-047-51815	NBU 1022-11B1CS	Sec 11 T10S R22E 1639 FNL 2609 FEL BHL Sec 11 T10S R22E 0577 FNL 1805 FEL
43-047-51817	NBU 1022-C4AS	Sec 11 T10S R22E 1645 FNL 2617 FEL BHL Sec 11 T10S R22E 0825 FNL 2462 FWL
43-047-51818	NBU 1022-11C4CS	Sec 11 T10S R22E 1651 FNL 2625 FEL BHL Sec 11 T10S R22E 1071 FNL 2131 FWL

RECEIVED: August 22, 2011

API #	WELL NAME	LOCATION
(Proposed PZ WASATCH-MESA VERDE)		
43-047-51855	NBU 1022-11F4AS	Sec 11 T10S R22E 1657 FNL 2633 FEL
		BHL Sec 11 T10S R22E 2138 FNL 2288 FWL
NBU 1022-2A PAD		
43-047-51803	NBU 1022-2G1CS	Sec 02 T10S R22E 0165 FNL 0760 FEL
		BHL Sec 02 T10S R22E 1905 FNL 1814 FEL
43-047-51807	NBU 1022-2G1BS	Sec 02 T10S R22E 0164 FNL 0770 FEL
		BHL Sec 02 T10S R22E 1573 FNL 1815 FEL
43-047-51808	NBU 1022-2H1BS	Sec 02 T10S R22E 0167 FNL 0730 FEL
		BHL Sec 02 T10S R22E 1410 FNL 0494 FEL
43-047-51812	NBU 1022-2H1CS	Sec 02 T10S R22E 0166 FNL 0740 FEL
		BHL Sec 02 T10S R22E 1743 FNL 0494 FEL
43-047-51825	NBU 1022-2H4BS	Sec 02 T10S R22E 0165 FNL 0750 FEL
		BHL Sec 02 T10S R22E 2074 FNL 0493 FEL
NBU 1022-11G4 PAD		
43-047-51805	NBU 1022-11A4CS	Sec 11 T10S R22E 2411 FNL 1535 FEL
		BHL Sec 11 T10S R22E 1075 FNL 0490 FEL
43-047-51814	NBU 1022-11H1BS	Sec 11 T10S R22E 2405 FNL 1526 FEL
		BHL Sec 11 T10S R22E 1406 FNL 0490 FEL
43-047-51822	NBU 1022-11G4CS	Sec 11 T10S R22E 2435 FNL 1566 FEL
		BHL Sec 11 T10S R22E 2559 FNL 1799 FEL
43-047-51823	NBU 1022-11G1BS	Sec 11 T10S R22E 2423 FNL 1550 FEL
		BHL Sec 11 T10S R22E 1568 FNL 1802 FEL
43-047-51837	NBU 1022-11G1CS	Sec 11 T10S R22E 2417 FNL 1542 FEL
		BHL Sec 11 T10S R22E 1954 FNL 1646 FEL
43-047-51853	NBU 1022-11G4BS	Sec 11 T10S R22E 2429 FNL 1558 FEL
		BHL Sec 11 T10S R22E 2229 FNL 1800 FEL
NBU 1022-2I PAD		
43-047-51809	NBU 1022-2I4CS	Sec 02 T10S R22E 1886 FSL 0949 FEL
		BHL Sec 02 T10S R22E 1576 FSL 0492 FEL
43-047-51810	NBU 1022-2P1BS	Sec 02 T10S R22E 1881 FSL 0957 FEL
		BHL Sec 02 T10S R22E 1245 FSL 0492 FEL
43-047-51824	NBU 1022-2I1CS	Sec 02 T10S R22E 1895 FSL 0931 FEL
		BHL Sec 02 T10S R22E 2240 FSL 0493 FEL
43-047-51829	NBU 1022-2I4BS	Sec 02 T10S R22E 1890 FSL 0940 FEL
		BHL Sec 02 T10S R22E 1909 FSL 0492 FEL
43-047-51838	NBU 1022-2P4BS	Sec 02 T10S R22E 1872 FSL 0975 FEL
		BHL Sec 02 T10S R22E 0581 FSL 0492 FEL
43-047-51852	NBU 1022-2P1CS	Sec 02 T10S R22E 1877 FSL 0966 FEL
		BHL Sec 02 T10S R22E 0913 FSL 0492 FEL
NBU 1022-2B PAD		
43-047-51811	NBU 1022-2B1CS	Sec 02 T10S R22E 0544 FNL 1813 FEL
		BHL Sec 02 T10S R22E 0579 FNL 1818 FEL

RECEIVED: August 22, 2011

API #	WELL NAME	LOCATION
(Proposed PZ WASATCH-MESA VERDE)		
43-047-51827	NBU 1022-2B4CS	Sec 02 T10S R22E 0543 FNL 1793 FEL
		BHL Sec 02 T10S R22E 1242 FNL 1816 FEL
43-047-51828	NBU 1022-2B4BS	Sec 02 T10S R22E 0543 FNL 1803 FEL
		BHL Sec 02 T10S R22E 0910 FNL 1817 FEL
43-047-51830	NBU 1022-2C1BS	Sec 02 T10S R22E 0544 FNL 1823 FEL
		BHL Sec 02 T10S R22E 0090 FNL 2158 FWL
NBU 1022-11J PAD		
43-047-51816	NBU 1022-11K4BS	Sec 11 T10S R22E 1980 FSL 2131 FEL
		BHL Sec 11 T10S R22E 1804 FSL 1963 FWL
43-047-51843	NBU 1022-11J1CS	Sec 11 T10S R22E 1990 FSL 2130 FEL
		BHL Sec 11 T10S R22E 2065 FSL 1797 FEL
43-047-51851	NBU 1022-11J1BS	Sec 11 T10S R22E 2000 FSL 2129 FEL
		BHL Sec 11 T10S R22E 2395 FSL 1798 FEL
NBU 1022-2J PAD		
43-047-51819	NBU 1022-2G4CS	Sec 02 T10S R22E 2375 FSL 1639 FEL
		BHL Sec 02 T10S R22E 2568 FNL 1813 FEL
43-047-51820	NBU 1022-2H4CS	Sec 02 T10S R22E 2351 FSL 1584 FEL
		BHL Sec 02 T10S R22E 2406 FNL 0493 FEL
43-047-51844	NBU 1022-2J4BS	Sec 02 T10S R22E 2367 FSL 1621 FEL
		BHL Sec 02 T10S R22E 1741 FSL 1811 FEL
43-047-51845	NBU 1022-2O1CS	Sec 02 T10S R22E 2343 FSL 1566 FEL
		BHL Sec 02 T10S R22E 0747 FSL 1808 FEL
43-047-51847	NBU 1022-2I1BS	Sec 02 T10S R22E 2347 FSL 1575 FEL
		BHL Sec 02 T10S R22E 2572 FSL 0493 FEL
43-047-51854	NBU 1022-2G4BS	Sec 02 T10S R22E 2359 FSL 1602 FEL
		BHL Sec 02 T10S R22E 2237 FNL 1814 FEL
NBU 1022-O1 PAD		
43-047-51821	NBU 1022-11O1CS	Sec 11 T10S R22E 0944 FSL 1360 FEL
		BHL Sec 11 T10S R22E 0744 FSL 1793 FEL
43-047-51831	NBU 1022-11O4CS	Sec 11 T10S R22E 0925 FSL 1366 FEL
		BHL Sec 11 T10S R22E 0079 FSL 1824 FEL
43-047-51832	NBU 1022-11P1BS	Sec 11 T10S R22E 0973 FSL 1351 FEL
		BHL Sec 11 T10S R22E 1068 FSL 0474 FEL
43-047-51833	NBU 1022-11P4BS	Sec 11 T10S R22E 0954 FSL 1357 FEL
		BHL Sec 11 T10S R22E 0456 FSL 0504 FEL
43-047-51836	NBU 1022-12M1BS	Sec 11 T10S R22E 0963 FSL 1354 FEL
		BHL Sec 12 T10S R22E 1077 FSL 0824 FWL
43-047-51856	NBU 1022-11O4BS	Sec 11 T10S R22E 0935 FSL 1363 FEL
		BHL Sec 11 T10S R22E 0413 FSL 1792 FEL

RECEIVED: August 22, 2011

API #	WELL NAME	LOCATION

(Proposed PZ WASATCH-MESA VERDE)

NBU 1022-11I1 PAD

43-047-51834	NBU 1022-11I1CS	Sec 11 T10S R22E 2545 FSL 0532 FEL
		BHL Sec 11 T10S R22E 2112 FSL 0481 FEL
43-047-51835	NBU 1022-12L1CS	Sec 11 T10S R22E 2554 FSL 0528 FEL
		BHL Sec 12 T10S R22E 2070 0FSL 823 FWL
43-047-51857	NBU 1022-11H4BS	Sec 11 T10S R22E 2582 FSL 0518 FEL
		BHL Sec 11 T10S R22E 2067 FNL 0489 FEL
43-047-51858	NBU 1022-11H4CS	Sec 11 T10S R22E 2592 FSL 0514 FEL
		BHL Sec 11 T10S R22E 2398 FNL 0489 FEL
43-047-51861	NBU 1022-12L1BS	Sec 11 T10S R22E 2564 FSL 0525 FEL
		BHL Sec 12 T10S R22E 2401 FSL 0822 FWL
43-047-51863	NBU 1022-11H1CS	Sec 11 T10S R22E 2573 FSL 0521 FEL
		BHL Sec 11 T10S R22E 1737 FNL 0490 FEL

NBU 1022-2P PAD

43-047-51839	NBU 1022-2P4CS	Sec 02 T10S R22E 0221 FSL 1342 FEL
		BHL Sec 02 T10S R22E 0255 FSL 0496 FEL
43-047-51841	NBU 1022-11B1BS	Sec 02 T10S R22E 0221 FSL 1382 FEL
		BHL Sec 11 T10S R22E 0280 FNL 1755 FEL
43-047-51842	NBU 1022-11A1BS	Sec 02 T10S R22E 0221 FSL 1352 FEL
		BHL Sec 11 T10S R22E 0080 FNL 0473 FEL
43-047-51846	NBU 1022-2O4CS	Sec 02 T10S R22E 0220 FSL 1402 FEL
		BHL Sec 02 T10S R22E 0095 FSL 1804 FEL
43-047-51848	NBU 1022-11A4BS	Sec 02 T10S R22E 0221 FSL 1372 FEL
		BHL Sec 11 T10S R22E 0744 FNL 0490 FEL
43-047-51849	NBU 1022-2O4BS	Sec 02 T10S R22E 0221 FSL 1392 FEL
		BHL Sec 02 T10S R22E 0415 FSL 1807 FEL
43-047-51850	NBU 1022-11A1CS	Sec 02 T10S R22E 0221 FSL 1362 FEL
		BHL Sec 11 T10S R22E 0413 FNL 0491 FEL

NBU 1022-14A PAD

43-047-51840	NBU 1022-11P4CS	Sec 14 T10S R22E 0379 FNL 1228 FEL
		BHL Sec 11 T10S R22E 0088 FSL 0466 FEL
43-047-51860	NBU 1022-12M1CS	Sec 14 T10S R22E 0385 FNL 1236 FEL
		BHL Sec 12 T10S R22E 0746 FSL 0825 FWL
43-047-51868	NBU 1022-12M4BS	Sec 14 T10S R22E 0391 FNL 1244 FEL
		BHL Sec 12 T10S R22E 0415 FSL 0825 FWL
43-047-51870	NBU 1022-12M4CS	Sec 14 T10S R22E 0397 FNL 1252 FEL
		BHL Sec 12 T10S R22E 0086 FSL 0819 FWL

NBU 1022-11O2 PAD

43-047-51859	NBU 1022-11K4CS	Sec 11 T10S R22E 1103 FSL 2372 FEL
		BHL Sec 11 T10S R22E 1442 FSL 2113 FWL

RECEIVED: August 22, 2011

API #	WELL NAME	LOCATION
(Proposed PZ WASATCH-MESA VERDE)		
43-047-51862	NBU 1022-11N1BS	Sec 11 T10S R22E 1094 FSL 2377 FEL
		BHL Sec 11 T10S R22E 1111 FSL 2105 FWL
43-047-51864	NBU 1022-11N1CS	Sec 11 T10S R22E 1085 FSL 2382 FEL
		BHL Sec 11 T10S R22E 0801 FSL 2127 FWL
43-047-51865	NBU 1022-11N4BS	Sec 11 T10S R22E 1077 FSL 2387 FEL
		BHL Sec 11 T10S R22E 0462 FSL 2127 FWL
43-047-51867	NBU 1022-11N4CS	Sec 11 T10S R22E 1068 FSL 2392 FEL
		BHL Sec 11 T10S R22E 0146 FSL 2084 FWL
43-047-51869	NBU 1022-11O2AS	Sec 11 T10S R22E 1111 FSL 2367 FEL
		BHL Sec 11 T10S R22E 1102 FSL 1964 FEL
NBU 1022-11I3 PAD		
43-047-51866	NBU 1022-11I4BS	Sec 11 T10S R22E 1489 FSL 0996 FEL
		BHL Sec 11 T10S R22E 1774 FSL 0485 FEL
43-047-51871	NBU 1022-11I4CS	Sec 11 T10S R22E 1459 FSL 0997 FEL
		BHL Sec 11 T10S R22E 1443 FSL 0497 FEL
43-047-51872	NBU 1022-12L4BS	Sec 11 T10S R22E 1479 FSL 0996 FEL
		BHL Sec 12 T10S R22E 1739 FSL 0823 FWL
43-047-51873	NBU 1022-12L4CS	Sec 11 T10S R22E 1469 FSL 0996 FEL
		BHL Sec 12 T10S R22E 1408 FSL 0824 FWL

This office has no objection to permitting the wells at this time.

Michael L. Coulthard

Digitally signed by Michael L. Coulthard
DN: cn=Michael L. Coulthard, o=Bureau of Land Management, ou=Branch of Minerals, email=Michael_Coulthard@blm.gov, c=US
Date: 2011.08.19 08:43:17 -06'00'

bcc: File - Natural Buttes Unit
Division of Oil Gas and Mining
Central Files
Agr. Sec. Chron
Fluid Chron

MCoulthard:mc:8-19-11

RECEIVED: August 22, 2011

API Well Number: 43047518050000

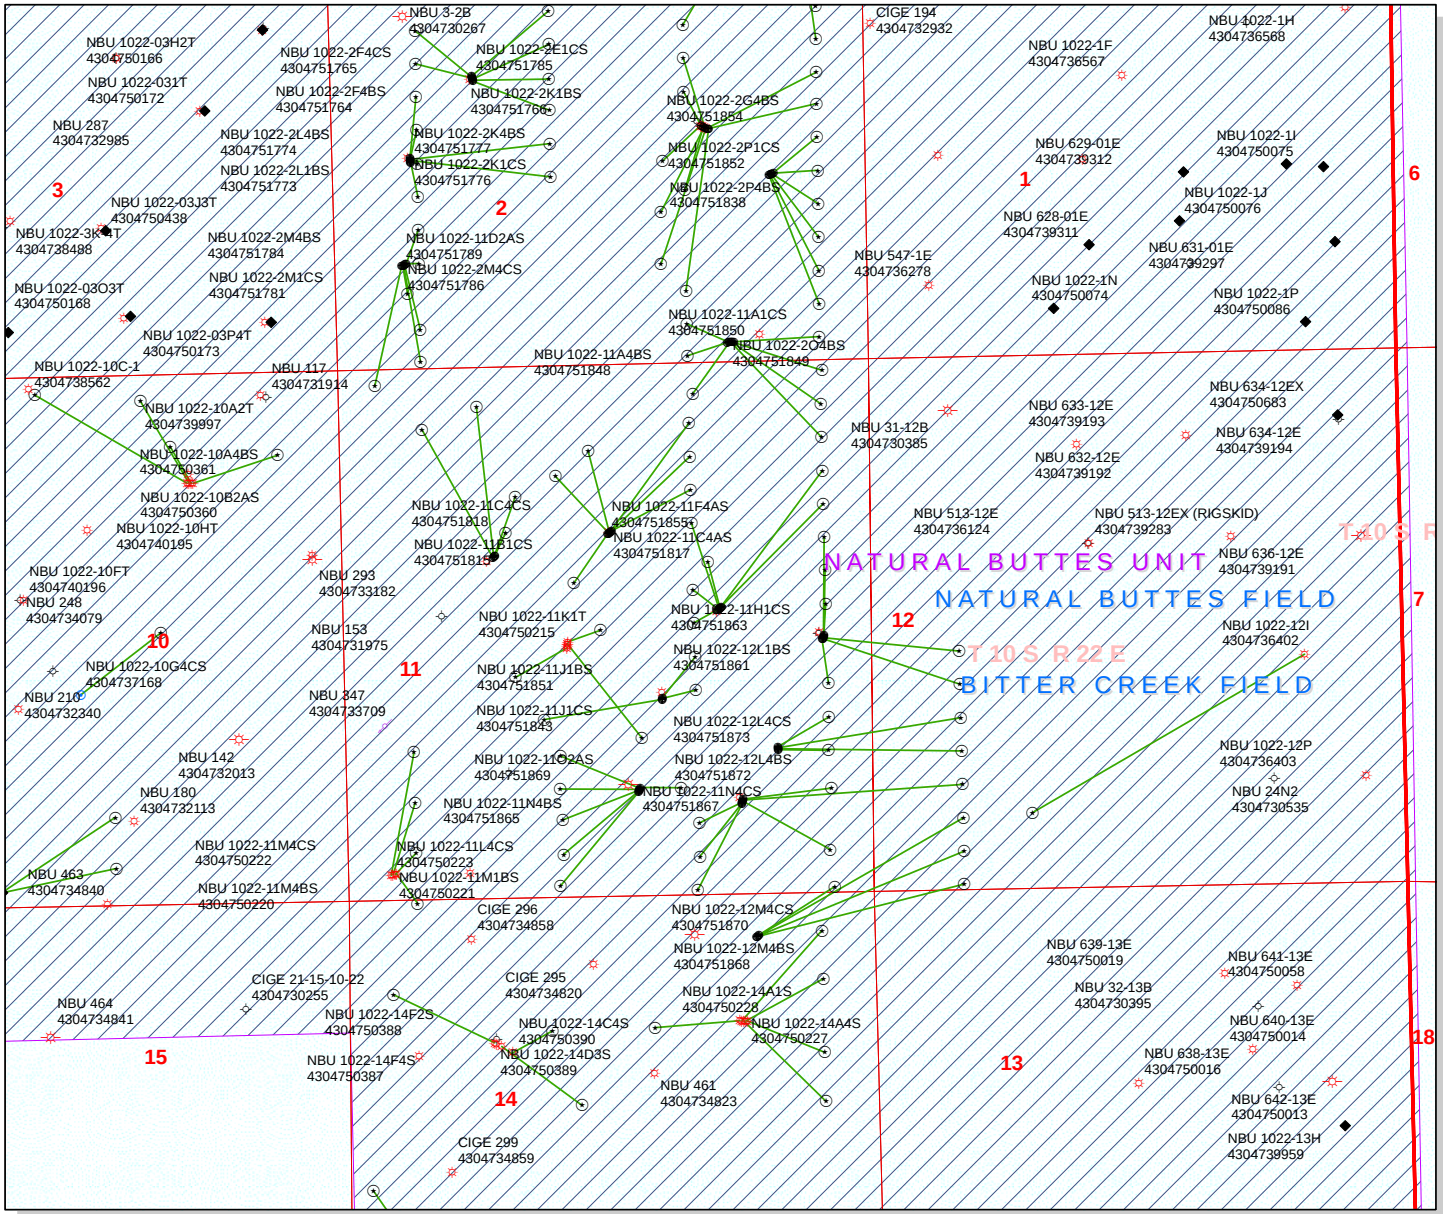

API Number: 4304751805

Well Name: NBU 1022-11A4CS

Township T1.0 . Range R2.2 . Section 11

Meridian: SLBM

Operator: KERR-MCGEE OIL & GAS ONSHORE, L.P.

Map Prepared:
Map Produced by Diana Mason





1:14,795

RECEIVED: August 22, 2011

From: Jim Davis
To: Hill, Brad; Mason, Diana
CC: Bonner, Ed; Garrison, LaVonne; Lytle, Andy
Date: 9/26/2011 5:08 PM
Subject: Anadarko APD approvals 10S 22E Sec 2, 11 and 14
Attachments: Anadarko Approvals from SITLA 9.26.11.xls

The following APDs have been approved by SITLA including arch clearance and paleo clearance:

4304751840	NBU 1022-11P4CS
4304751860	NBU 1022-12M1CS
4304751868	NBU 1022-12M4BS
4304751870	NBU 1022-12M4CS
4304751803	NBU 1022-2G1CS
4304751807	NBU 1022-2G1BS
4304751808	NBU 1022-2H1BS
4304751812	NBU 1022-2H1CS
4304751825	NBU 1022-2H4BS
4304751811	NBU 1022-2B1CS
4304751827	NBU 1022-2B4CS
4304751828	NBU 1022-2B4BS
4304751830	NBU 1022-2C1BS
4304751809	NBU 1022-2I4CS
4304751810	NBU 1022-2P1BS
4304751824	NBU 1022-2I1CS
4304751829	NBU 1022-2I4BS
4304751838	NBU 1022-2P4BS
4304751852	NBU 1022-2P1CS
4304751839	NBU 1022-2P4CS
4304751841	NBU 1022-11B1BS
4304751842	NBU 1022-11A1BS
4304751846	NBU 1022-2O4CS
4304751848	NBU 1022-11A4BS
4304751849	NBU 1022-2O4BS
4304751850	NBU 1022-11A1CS

These APDS are approved including arch clearance but will require **spot paleo monitoring** as recommended in the applicable paleo reports:

4304751758	NBU 1022-2C1CS
4304751767	NBU 1022-2C4BS
4304751768	NBU 1022-2C4CS
4304751779	NBU 1022-2D1BS
4304751780	NBU 1022-2D4BS
4304751782	NBU 1022-2E1BS
4304751783	NBU 1022-2F1BS
4304751760	NBU 1022-2E4BS
4304751761	NBU 1022-2F1CS
4304751764	NBU 1022-2F4BS
4304751765	NBU 1022-2F4CS
4304751766	NBU 1022-2K1BS
4304751785	NBU 1022-2E1CS
4304751775	NBU 1022-2L4CS
4304751778	NBU 1022-2M1BS
4304751781	NBU 1022-2M1CS
4304751784	NBU 1022-2M4BS
4304751786	NBU 1022-2M4CS
4304751789	NBU 1022-11D2AS

RECEIVED: September 27, 2011

4304751802	NBU 1022-11B4CS
4304751813	NBU 1022-11B4BS
4304751815	NBU 1022-11B1CS
4304751817	NBU 1022-11C4AS
4304751818	NBU 1022-11C4CS
4304751855	NBU 1022-11F4AS
4304751805	NBU 1022-11A4CS
4304751814	NBU 1022-11H1BS
4304751822	NBU 1022-11G4CS
4304751823	NBU 1022-11G1BS
4304751837	NBU 1022-11G1CS
4304751853	NBU 1022-11G4BS
4304751834	NBU 1022-11I1CS
4304751835	NBU 1022-12L1CS
4304751857	NBU 1022-11H4BS
4304751858	NBU 1022-11H4CS
4304751861	NBU 1022-12L1BS
4304751863	NBU 1022-11H1CS
4304751866	NBU 1022-11I4BS
4304751871	NBU 1022-11I4CS
4304751872	NBU 1022-12L4BS
4304751873	NBU 1022-12L4CS
4304751816	NBU 1022-11K4BS
4304751843	NBU 1022-11J1CS
4304751851	NBU 1022-11J1BS
4304751859	NBU 1022-11K4CS
4304751862	NBU 1022-11N1BS
4304751864	NBU 1022-11N1CS
4304751865	NBU 1022-11N4BS
4304751867	NBU 1022-11N4CS
4304751869	NBU 1022-11O2AS

These APDS are approved including arch clearance but will require **full paleo monitoring** as recommended in the applicable paleo reports:

4304751771	NBU 1022-2E4CS
4304751772	NBU 1022-2L1CS
4304751773	NBU 1022-2L1BS
4304751774	NBU 1022-2L4BS
4304751776	NBU 1022-2K1CS
4304751777	NBU 1022-2K4BS
4304751819	NBU 1022-2G4CS
4304751820	NBU 1022-2H4CS
4304751844	NBU 1022-2J4BS
4304751845	NBU 1022-2O1CS
4304751847	NBU 1022-2I1BS
4304751854	NBU 1022-2G4BS
4304751797	NBU 1022-11C2CS
4304751799	NBU 1022-11C3DS
4304751800	NBU 1022-11D1CS
4304751801	NBU 1022-11F2DS
4304751821	NBU 1022-11O1CS
4304751831	NBU 1022-11O4CS
4304751832	NBU 1022-11P1BS
4304751833	NBU 1022-11P4BS
4304751836	NBU 1022-12M1BS
4304751856	NBU 1022-11O4BS

RECEIVED: September 27, 2011

That's a big enough list that I'm including a simple spreadsheet that has this same information, but organized in such a way as may be more useful to some of you.
Thanks.
-Jim

Jim Davis
Utah Trust Lands Administration
jimdavis1@utah.gov
Phone: (801) 538-5156

RECEIVED: September 27, 2011

API Well Number: 43047518050000

BOPE REVIEW KERR-MCGEE OIL & GAS ONSHORE, L.P. NBU 1022-11A4CS 43047518050000

Well Name	KERR-MCGEE OIL & GAS ONSHORE, L.P. NBU 1022-11A4C			
String	Surf	Prod		
Casing Size(")	8.625	4.500		
Setting Depth (TVD)	2003	8425		
Previous Shoe Setting Depth (TVD)	40	2003		
Max Mud Weight (ppg)	8.3	12.5		
BOPE Proposed (psi)	500	5000		
Casing Internal Yield (psi)	3390	7780		
Operators Max Anticipated Pressure (psi)	5393	12.3		

Calculations	Surf String	8.625	"	
Max BHP (psi)	.052*Setting Depth*MW=	864		
			BOPE Adequate For Drilling And Setting Casing at Depth?	
MASP (Gas) (psi)	Max BHP-(0.12*Setting Depth)=	624	NO	air drill
MASP (Gas/Mud) (psi)	Max BHP-(0.22*Setting Depth)=	423	YES	OK
			*Can Full Expected Pressure Be Held At Previous Shoe?	
Pressure At Previous Shoe	Max BHP-.22*(Setting Depth - Previous Shoe Depth)=	432	NO	Reasonable depth in area
Required Casing/BOPE Test Pressure=		2003	psi	
*Max Pressure Allowed @ Previous Casing Shoe=		40	psi	*Assumes 1psi/ft frac gradient

Calculations	Prod String	4.500	"	
Max BHP (psi)	.052*Setting Depth*MW=	5476		
			BOPE Adequate For Drilling And Setting Casing at Depth?	
MASP (Gas) (psi)	Max BHP-(0.12*Setting Depth)=	4465	YES	
MASP (Gas/Mud) (psi)	Max BHP-(0.22*Setting Depth)=	3623	YES	OK
			*Can Full Expected Pressure Be Held At Previous Shoe?	
Pressure At Previous Shoe	Max BHP-.22*(Setting Depth - Previous Shoe Depth)=	4063	NO	Reasonable
Required Casing/BOPE Test Pressure=		5000	psi	
*Max Pressure Allowed @ Previous Casing Shoe=		2003	psi	*Assumes 1psi/ft frac gradient

Calculations	String		"	
Max BHP (psi)	.052*Setting Depth*MW=			
			BOPE Adequate For Drilling And Setting Casing at Depth?	
MASP (Gas) (psi)	Max BHP-(0.12*Setting Depth)=		NO	
MASP (Gas/Mud) (psi)	Max BHP-(0.22*Setting Depth)=		NO	
			*Can Full Expected Pressure Be Held At Previous Shoe?	
Pressure At Previous Shoe	Max BHP-.22*(Setting Depth - Previous Shoe Depth)=		NO	
Required Casing/BOPE Test Pressure=			psi	
*Max Pressure Allowed @ Previous Casing Shoe=			psi	*Assumes 1psi/ft frac gradient

Calculations	String		"	
Max BHP (psi)	.052*Setting Depth*MW=			
			BOPE Adequate For Drilling And Setting Casing at Depth?	
MASP (Gas) (psi)	Max BHP-(0.12*Setting Depth)=		NO	
MASP (Gas/Mud) (psi)	Max BHP-(0.22*Setting Depth)=		NO	
			*Can Full Expected Pressure Be Held At Previous Shoe?	
Pressure At Previous Shoe	Max BHP-.22*(Setting Depth - Previous Shoe Depth)=		NO	
Required Casing/BOPE Test Pressure=			psi	

RECEIVED: October 25, 2011

***Max Pressure Allowed @ Previous Casing Shoe=**		psi *Assumes 1psi/ft frac gradient

RECEIVED: October 25, 2011

43047518050000 NBU 1022-11A4CS

Casing Schematic

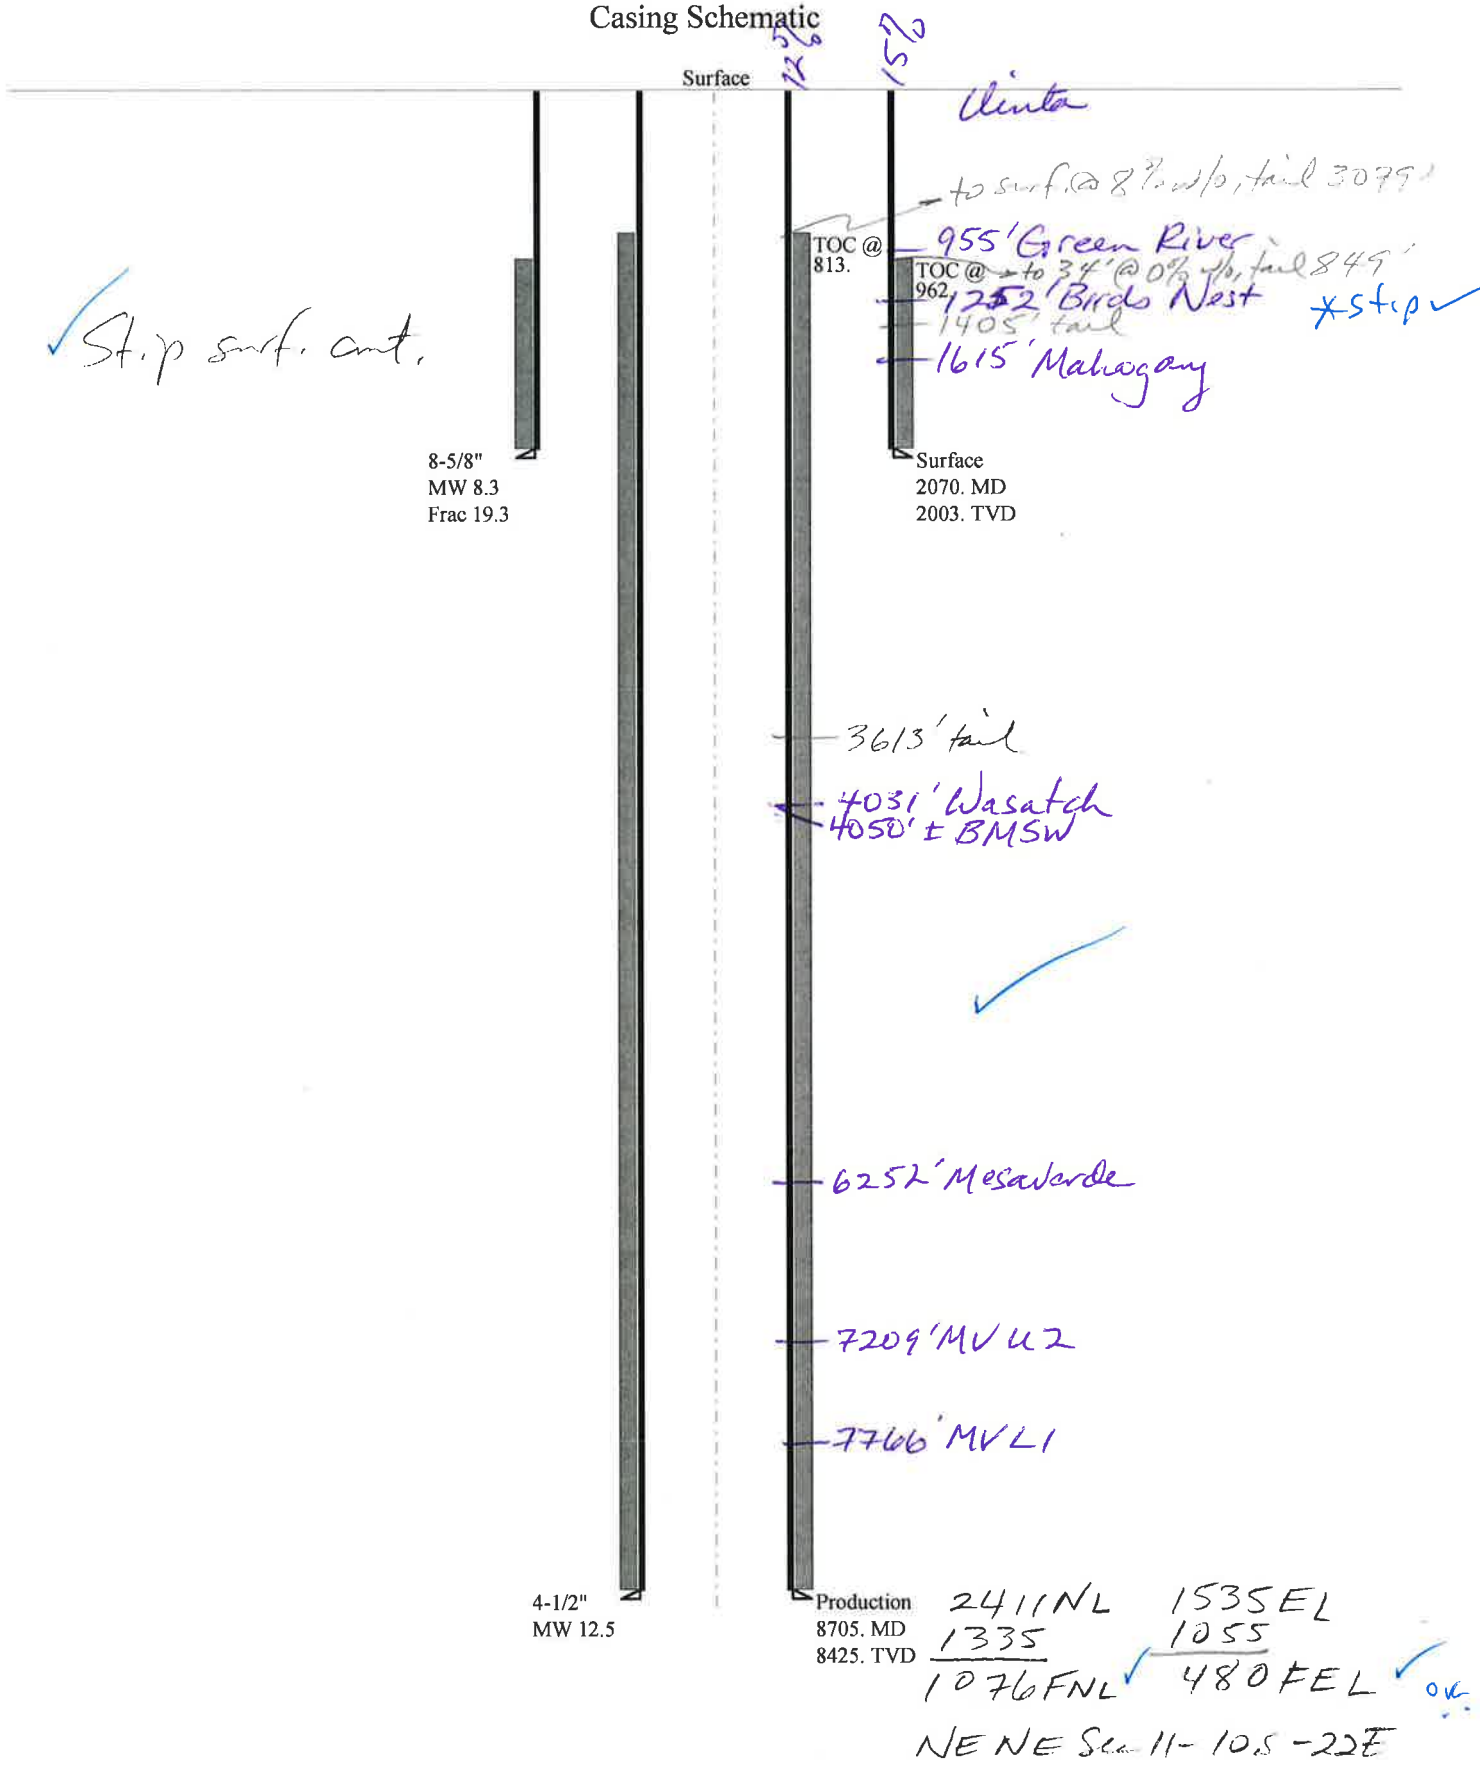

Well name:	**43047518050000 NBU 1022-11A4CS**
Operator:	**KERR-MCGEE OIL & GAS ONSHORE, L.P.**
String type:	Surface
Project ID:	43-047-51805
Location:	UINTAH COUNTY

Design parameters:

Collapse
Mud weight: 8.330 ppg
Design is based on evacuated pipe.

Burst
Max anticipated surface pressure: 1,822 psi
Internal gradient: 0.120 psi/ft
Calculated BHP 2,062 psi

No backup mud specified.

Minimum design factors:

Collapse:
Design factor 1.125

Burst:
Design factor 1.00

Tension:
8 Round STC: 1.80 (J)
8 Round LTC: 1.70 (J)
Buttress: 1.60 (J)
Premium: 1.50 (J)
Body yield: 1.50 (B)

Tension is based on air weight.
Neutral point: 1,808 ft

Environment:
H2S considered? No
Surface temperature: 74 °F
Bottom hole temperature: 102 °F
Temperature gradient: 1.40 °F/100ft
Minimum section length: 100 ft

Cement top: 962 ft

Directional Info - Build & Drop
Kick-off point 300 ft
Departure at shoe: 436 ft
Maximum dogleg: 2 °/100ft
Inclination at shoe: 20 °

Re subsequent strings:
Next setting depth: 8,425 ft
Next mud weight: 12.500 ppg
Next setting BHP: 5,471 psi
Fracture mud wt: 19.250 ppg
Fracture depth: 2,070 ft
Injection pressure: 2,070 psi

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Est. Cost ($)
1	2070	8.625	28.00	I-55	LT&C	2003	2070	7.892	81972

Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (kips)	Tension Strength (kips)	Tension Design Factor
1	867	1880	2.169	2062	3390	1.64	56.1	348	6.20 J

Prepared by: Helen Sadik-Macdonald, Div of Oil,Gas & Mining
Phone: 801 538-5357
FAX: 801-359-3940
Date: August 25,2011
Salt Lake City, Utah

Remarks:
Collapse is based on a vertical depth of 2003 ft, a mud weight of 8.33 ppg The casing is considered to be evacuated for collapse purposes. Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.
Collapse strength is (biaxially) derated for doglegs in directional wells by multiplying the tensile stress by the cross section area to calculate a

Engineering responsibility for use of this design will be that of the purchaser.

Well name:	**43047518050000 NBU 1022-11A4CS**
Operator:	**KERR-MCGEE OIL & GAS ONSHORE, L.P.**
String type:	Production
Project ID:	43-047-51805
Location:	UINTAH COUNTY

Design parameters:

Collapse
Mud weight: 12.500 ppg
Design is based on evacuated pipe.

Burst
Max anticipated surface pressure: 3,617 psi
Internal gradient: 0.220 psi/ft
Calculated BHP 5,471 psi

No backup mud specified.

Minimum design factors:

Collapse:
Design factor 1.125

Burst:
Design factor 1.00

Tension:
8 Round STC: 1.80 (J)
8 Round LTC: 1.80 (J)
Buttress: 1.60 (J)
Premium: 1.50 (J)
Body yield: 1.60 (B)

Tension is based on air weight.
Neutral point: 7,131 ft

Environment:
H2S considered? No
Surface temperature: 74 °F
Bottom hole temperature: 192 °F
Temperature gradient: 1.40 °F/100ft
Minimum section length: 100 ft

Cement top: 813 ft

Directional Info - Build & Drop
Kick-off point 300 ft
Departure at shoe: 1702 ft
Maximum dogleg: 2 °/100ft
Inclination at shoe: 0 °

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Est. Cost ($)
1	8705	4.5	11.60	I-80	LT&C	8425	8705	3.875	114906

Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (kips)	Tension Strength (kips)	Tension Design Factor
1	5471	6360	1.162	5471	7780	1.42	97.7	212	2.17 J

Prepared by: Helen Sadik-Macdonald
Div of Oil,Gas & Mining
Phone: 801 538-5357
FAX: 801-359-3940
Date: August 25,2011
Salt Lake City, Utah

Remarks:
Collapse is based on a vertical depth of 8425 ft, a mud weight of 12.5 ppg The casing is considered to be evacuated for collapse purposes. Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.
Collapse strength is (biaxially) derated for doglegs in directional wells by multiplying the tensile stress by the cross section area to calculate a

Engineering responsibility for use of this design will be that of the purchaser.

ON-SITE PREDRILL EVALUATION
Utah Division of Oil, Gas and Mining

Operator	KERR-MCGEE OIL & GAS ONSHORE, L.P.								
Well Name	NBU 1022-11A4CS								
API Number	43047518050000			**APD No**	4344	**Field/Unit**		NATURAL BUTTES	
Location: 1/4,1/4	SWNE	**Sec** 11	**Tw** 10.0S	**Rng** 22.0E	2411	FNL	1535	FEL	
GPS Coord (UTM)	636434 4424785			**Surface Owner**					

Participants

Andy Lytle, Sheila Wopsock, Charles Chase, Grizz Oleen, Mark Kuehn, Doyle Holmes, (Kerr McGee). John Slaugh, Mitch Batty, (Timberline). Jim Davis (SITLA). David Hackford, (DOGM).

Regional/Local Setting & Topography

The general area is in the southeast portion of the Natural Buttes Unit on the northeast end of a major drainage divide called Archy Bench.. Within this area is the White River and rugged drainages that drain into it. Topography is varied and frequently dissected by short draws or washes, which become overly steep as they approach the White River breaks or rim. Distance to the White River varies from ¼ mile to 2 miles. The side drainages are dry except for ephemeral flows. No seeps or springs exist in the area. An occasional pond has been constructed to supply water for livestock and antelope. Vernal, Utah is approximately 41 air miles to the northwest. Access from Vernal is approximately 60.7 road miles following Utah State, Uintah County and oilfield development roads. Five wells, in addition to this one will be directionally drilled from this pad. (For a total of six new wells). There is one existing well on this pad. (The NBU 272). At this time, the decision rather to PA or TA this well has not been made. This proposed location takes in an existing location, and very little new construction will be necessary except for digging the reserve pit. The existing access road will be adequate and will be used. The location runs in a northeast-southwest direction along the top of a flat topped ridge. This ridge breaks off sharply into rugged secondary canyons on the north, west and east sides. New construction will consist of approx. 50 feet on all sides of the existing pad, and an additional 50 feet on the south side for reserve pit and excess cut stockpile. No drainage concerns exist, and no diversions will be needed. The pad as modified should be stable and should be a suitable location for seven wells, and is on the best site available in the immediate area.

Surface Use Plan

Current Surface Use
Wildlfe Habitat
Existing Well Pad

New Road Miles	Well Pad	Src Const Material	Surface Formation
0	**Width** 337 **Length** 475	Onsite	UNTA

Ancillary Facilities N

Waste Management Plan Adequate? Y

Environmental Parameters

Affected Floodplains and/or Wetlands N

Flora / Fauna

Prickly pear, wild onion, shadscale, mat saltbrush, Indian ricegrass, halogeton, pepper grass, annuals and curly Vegetation is a salt desert shrub type. Principal species present are cheatgrass, black sagebrush, stipa, mesquite grass.

Sheep, antelope, raptors and small mammals and birds.

Soil Type and Characteristics

Shallow rocky sandy loam.

Erosion Issues N

Sedimentation Issues N

Site Stability Issues N

Drainage Diverson Required? N

Berm Required? N

Erosion Sedimentation Control Required? N

Paleo Survey Run? Y **Paleo Potental Observed?** N **Cultural Survey Run?** Y **Cultural Resources?** N

Reserve Pit

Site-Specific Factors		Site Ranking	
Distance to Groundwater (feet)	100 to 200	5	
Distance to Surface Water (feet)	>1000	0	
Dist. Nearest Municipal Well (ft)	>5280	0	
Distance to Other Wells (feet)		20	
Native Soil Type	Mod permeability	10	
Fluid Type	Fresh Water	5	
Drill Cuttings	Normal Rock	0	
Annual Precipitation (inches)		0	
Affected Populations			
Presence Nearby Utility Conduits	Not Present	0	
	Final Score	40	Sensitivity Level

Characteristics / Requirements

The reserve pit is planned in an area of cut on the east side of the location. Dimensions are 120’ x 234’ x 12’ deep with 2’ of freeboard. Kerr McGee agreed to line the pit with a 30-mil liner and 2 layers of felt.

Closed Loop Mud Required? N **Liner Required?** Y **Liner Thickness** 30 **Pit Underlayment Required?** Y

Other Observations / Comments

David Hackford	8/18/2011
Evaluator	**Date / Time**

Application for Permit to Drill
Statement of Basis

APD No	API WellNo	Status	Well Type	Surf Owner	CBM
4344	43047518050000	SITLA	GW	S	No
Operator	KERR-MCGEE OIL & GAS ONSHORE, L.P.		**Surface Owner-APD**		
Well Name	NBU 1022-11A4CS		**Unit**	NATURAL BUTTES	
Field	NATURAL BUTTES		**Type of Work**	DRILL	
Location	SWNE 11 10S 22E S 2411 FNL 1535 FEL		GPS Coord (UTM)	636370E	4424989N

Geologic Statement of Basis

Kerr McGee proposes to set 2,070’ of surface casing at this location. The depth to the base of the moderately saline water at this location is estimated to be at a depth of 4,050'. A search of Division of Water Rights records shows no water wells within a 10,000 foot radius of the center of Section 11. The surface formation at this site is the Uinta Formation. The Uinta Formation is made up of interbedded shales and sandstones. The sandstones are mostly lenticular and discontinuous and should not be a significant source of useable ground water. Production casing cement should be brought up above the base of the moderately saline ground water to isolate it from fresher waters uphole.

Brad Hill	9/1/2011
APD Evaluator	**Date / Time**

Surface Statement of Basis

The general area is in the southeast portion of the Natural Buttes Unit on the northeast end of a major drainage divide called Archy Bench. Within this area is the White River and rugged drainages that drain into it. Topography is varied and frequently dissected by short draws or washes, which become overly steep as they approach the White River breaks or rim. Distance to the White River varies from ¼ mile to 2 miles. The side drainages are dry except for ephemeral flows. No seeps or springs exist in the area. An occasional pond has been constructed to supply water for livestock and antelope. Vernal, Utah is approximately 41 air miles to the northwest. Access from Vernal is approximately 60.7 road miles following Utah State, Uintah County and oilfield development roads. The existing access road will be adequate and will be used.

Six wells will be directionally drilled from this location. They are the NBU 1022-11H1BS, NBU 1022-11A4CS, NBU 1022-11G1BS, NBU 1022-11G4BS, NBU 1022-11G4CS and the NBU 1022-11G1CS. The existing location has one existing well. This well is the NBU 272, and at this time the decision rather to PA or TA this well has not been made. The location is on a flat topped ridge that runs in a northeast-southwest direction. This ridge breaks off sharply into rugged secondary canyons on the north, west and east sides. No drainage concerns exist, and no diversions will be needed. The pad as modified should be stable and sufficient for seven wells, and is the best site for a location in the immediate area.

Excess material will be stockpiled on the south sides of the location. Approx. 50’ of additional construction will be necessary on all sides of the original location.

Both the surface and minerals are owned by SITLA. Jim Davis of SITLA and Ben Williams with DWR were invited by email to the pre-site evaluation. Jim Davis was present. Kerr McGee was told to consult with SITLA for reclamation standards including seeding mixes to be used.

David Hackford	8/18/2011
Onsite Evaluator	**Date / Time**

Conditions of Approval / Application for Permit to Drill

RECEIVED: October 25, 2011

Application for Permit to Drill
Statement of Basis

Category	Condition
Pits	A synthetic liner with a minimum thickness of 30 mils with a felt subliner shall be properly installed and maintained in the reserve pit.
Surface	The reserve pit should be located on the east side of the location

RECEIVED: October 25, 2011

WORKSHEET
APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 8/10/2011 **API NO. ASSIGNED:** 43047518050000
WELL NAME: NBU 1022-11A4CS
OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P. (N2995) **PHONE NUMBER:** 720 929-6100
CONTACT: Andy Lytle

PROPOSED LOCATION: SWNE 11 100S 220E **Permit Tech Review:** ☑

SURFACE: 2411 FNL 1535 FEL **Engineering Review:** ☑

BOTTOM: 1075 FNL 0490 FEL **Geology Review:** ☑

COUNTY: UINTAH
LATITUDE: 39.96410 **LONGITUDE:** -109.40260
UTM SURF EASTINGS: 636370.00 **NORTHINGS:** 4424989.00
FIELD NAME: NATURAL BUTTES
LEASE TYPE: 3 - State
LEASE NUMBER: UO1197A-ST **PROPOSED PRODUCING FORMATION(S):** WASATCH-MESA VERDE
SURFACE OWNER: 3 - State **COALBED METHANE:** NO

RECEIVED AND/OR REVIEWED:

- ☑ **PLAT**
- ☑ **Bond:** STATE/FEE - 22013542
- ☐ **Potash**
- ☑ **Oil Shale 190-5**
- ☐ **Oil Shale 190-3**
- ☐ **Oil Shale 190-13**
- ☑ **Water Permit:** 43-8496
- ☐ **RDCC Review:**
- ☐ **Fee Surface Agreement**
- ☑ **Intent to Commingle**

Commingling Approved

LOCATION AND SITING:

- ☐ **R649-2-3.**

Unit: NATURAL BUTTES

- ☐ **R649-3-2. General**
- ☐ **R649-3-3. Exception**
- ☑ **Drilling Unit**

Board Cause No: Cause 173-14
Effective Date: 12/2/1999
Siting: 460' Fr U Bdry & Uncommitted Tracts

- ☑ **R649-3-11. Directional Drill**

Comments: Presite Completed

Stipulations:
3 - Commingling - ddoucet
5 - Statement of Basis - bhill
15 - Directional - dmason
17 - Oil Shale 190-5(b) - dmason
25 - Surface Casing - hmacdonald

RECEIVED: October 25, 2011

GARY R. HERBERT
Governor
GREGORY S. BELL
Lieutenant Governor

State of Utah
DEPARTMENT OF NATURAL RESOURCES
MICHAEL R. STYLER
Executive Director
Division of Oil, Gas and Mining
JOHN R. BAZA
Division Director

Permit To Drill

****

Well Name: NBU 1022-11A4CS
API Well Number: 43047518050000
Lease Number: UO1197A-ST
Surface Owner: STATE
Approval Date: 10/25/2011

Issued to:
KERR-MCGEE OIL & GAS ONSHORE, L.P., P.O. Box 173779, Denver, CO 80217

Authority:
Pursuant to Utah Code Ann. §40-6-1 et seq., and Utah Administrative Code R649-3-1 et seq., the Utah Division of Oil, Gas and Mining issues conditions of approval, and permit to drill the listed well. This permit is issued in accordance with the requirements of Cause 173-14. The expected producing formation or pool is the WASATCH-MESA VERDE Formation(s), completion into any other zones will require filing a Sundry Notice (Form 9). Completion and commingling of more than one pool will require approval in accordance with R649-3-22.

Duration:
This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date

Commingle:
In accordance with Board Cause No. 173-14, commingling of the production from the Wasatch formation and the Mesaverde formation in this well is allowed.

General:
Compliance with the requirements of Utah Admin. R. 649-1 et seq., the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

Conditions of Approval:
In accordance with Utah Admin. R.649-3-11, Directional Drilling, the operator shall submit a complete angular deviation and directional survey report to the Division within 30 days following completion of the well.

In accordance with the Order in Cause No. 190-5(b) dated October 28, 1982, the operator shall comply with the requirements of Rules R649-3-31 and R649-3-27 pertaining to Designated Oil Shale Areas. Additionally, the operators shall ensure that the surface and or production casing is properly cemented over the entire oil shale section as defined by Rule R649-3-31. The Operator shall report the actual depth the oil shale is encountered to the division.

Surface casing shall be cemented to the surface.

Compliance with the Conditions of Approval/Application for Permit to Drill outlined in the Statement of Basis (copy attached).

Additional Approvals:
The operator is required to obtain approval from the Division of Oil, Gas and mining before performing any of the following actions during the drilling of this well:

- Any changes to the approved drilling plan – contact Dustin Doucet
- Significant plug back of the well – contact Dustin Doucet
- Plug and abandonment of the well – contact Dustin Doucet

Notification Requirements:
The operator is required to notify the Division of Oil, Gas and Mining of the following actions during drilling of this well:

- Within 24 hours following the spudding of the well – contact Carol Daniels
  OR
  submit an electronic sundry notice (pre-registration required) via the Utah Oil & Gas website at http://oilgas.ogm.utah.gov
- 24 hours prior to testing blowout prevention equipment - contact Dan Jarvis
- 24 hours prior to cementing or testing casing – contact Dan Jarvis
- Within 24 hours of making any emergency changes to the approved drilling program – contact Dustin Doucet
- 24 hours prior to commencing operations to plug and abandon the well – contact Dan Jarvis

Contact Information:
The following are Division of Oil, Gas and Mining contacts and their telephone numbers (please leave a voicemail message if the person is not available to take the call):

- Carol Daniels 801-538-5284 - office
- Dustin Doucet 801-538-5281 - office
  801-733-0983 - after office hours
- Dan Jarvis 801-538-5338 - office
  801-231-8956 - after office hours

Reporting Requirements:
All reports, forms and submittals as required by the Utah Oil and Gas Conservation General Rules will be promptly filed with the Division of Oil, Gas and Mining, including but not limited to:

- Entity Action Form (Form 6) – due within 5 days of spudding the well
- Monthly Status Report (Form 9) – due by 5th day of the following calendar month
- Requests to Change Plans (Form 9) – due prior to implementation
- Written Notice of Emergency Changes (Form 9) – due within 5 days
- Notice of Operations Suspension or Resumption (Form 9) – due prior to implementation
- Report of Water Encountered (Form 7) – due within 30 days after completion
- Well Completion Report (Form 8) – due within 30 days after completion or plugging

Approved By:

For John Rogers
Associate Director, Oil & Gas

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS, AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

5.LEASE DESIGNATION AND SERIAL NUMBER: UO1197A-ST

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

7.UNIT or CA AGREEMENT NAME: NATURAL BUTTES

1. TYPE OF WELL Gas Well

8. WELL NAME and NUMBER: NBU 1022-11A4CS

2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.

9. API NUMBER: 43047518050000

3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779

PHONE NUMBER: 720 929-6526

9. FIELD and POOL or WILDCAT: NATURAL BUTTES

4. LOCATION OF WELL
FOOTAGES AT SURFACE: 2411 FNL 1535 FEL
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SWNE Section: 11 Township: 10.0S Range: 22.0E Meridian: S

COUNTY: UINTAH

STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
✓ NOTICE OF INTENT Approximate date work will start: 1/18/2012	☐ ACIDIZE	☐ ALTER CASING	☐ CASING REPAIR
☐ SUBSEQUENT REPORT Date of Work Completion:	☐ CHANGE TO PREVIOUS PLANS	☐ CHANGE TUBING	☐ CHANGE WELL NAME
☐ SPUD REPORT Date of Spud:	☐ CHANGE WELL STATUS	☐ COMMINGLE PRODUCING FORMATIONS	☐ CONVERT WELL TYPE
☐ DRILLING REPORT Report Date:	☐ DEEPEN	☐ FRACTURE TREAT	☐ NEW CONSTRUCTION
	☐ OPERATOR CHANGE	☐ PLUG AND ABANDON	☐ PLUG BACK
	☐ PRODUCTION START OR RESUME	☐ RECLAMATION OF WELL SITE	☐ RECOMPLETE DIFFERENT FORMATION
	☐ REPERFORATE CURRENT FORMATION	☐ SIDETRACK TO REPAIR WELL	☐ TEMPORARY ABANDON
	☐ TUBING REPAIR	☐ VENT OR FLARE	☐ WATER DISPOSAL
	☐ WATER SHUTOFF	☐ SI TA STATUS EXTENSION	☐ APD EXTENSION
	☐ WILDCAT WELL DETERMINATION	✓ OTHER	OTHER: Pit Refurb/ ACTS Lines

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Kerr-McGee Oil & Gas Onshore, LP is requesting to refurb the existing pit on this multi-well pad for completion operations. The refurb pit will be relined per the requirements in the COA of the APD. Upon completion of the wells on this pad, Kerr-McGee is also requesting to utilize this pit as an ACTS staging pit to be utilized for other completion operations in the area. The trucks will unload water into these tanks before the water is placed into the refurbed pit. The purpose of the frac tanks is to collect any hydro-carbons that may have been associated with the other completion operations before releasing into the pit. We plan to keep this pit open for 1 year. During this time the surrounding well location completion fluids will be recycled in this pit and utilized for other frac jobs in the surrounding sections. Thank you.

Approved by the Utah Division of Oil, Gas and Mining

Date: January 31, 2012

By:

NAME (PLEASE PRINT)	PHONE NUMBER	TITLE
Gina Becker	720 929-6086	Regulatory Analyst II
SIGNATURE N/A		**DATE** 1/18/2012

RECEIVED: Jan. 18, 2012

The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Sundry Conditions of Approval Well Number 43047518050000

A synthetic liner with a minimum thickness of 30 mils with a felt subliner shall be properly installed and maintained in the pit.

RECEIVED: Jan. 31, 2012

SUBMIT AS EMAIL | Print Form

BLM - Vernal Field Office - Notification Form

Operator KERR-McGEE OIL & GAS Rig Name/# BUCKET RIG
Submitted By J. Scharnowske Phone Number 720.929.6304
Well Name/Number NBU 1022-11A4CS
Qtr/Qtr SWNE Section 11 Township 10S Range 22E
Lease Serial Number UO1197A-ST
API Number 4304751805

Spud Notice – Spud is the initial spudding of the well, not drilling out below a casing string.

Date/Time 05/23/2012 07:00 HRS AM ☐ PM ☐

Casing – Please report time casing run starts, not cementing times.

- ☑ Surface Casing
- ☐ Intermediate Casing
- ☐ Production Casing
- ☐ Liner
- ☐ Other

RECEIVED
MAY 2 2 2012
DIV. OF OIL, GAS & MINING

Date/Time 06/07/2012 08:00 HRS AM ☐ PM ☐

BOPE

- ☐ Initial BOPE test at surface casing point
- ☐ BOPE test at intermediate casing point
- ☐ 30 day BOPE test
- ☐ Other

Date/Time _____ _____ AM ☐ PM ☐

Remarks ESTIMATED DATE AND TIME. PLEASE CONTACT KENNY GATHINGS AT 435.828.0986 OR LOVEL YOUNG AT 435.781.7051

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS, AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

5.LEASE DESIGNATION AND SERIAL NUMBER: UO1197A-ST

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

7.UNIT or CA AGREEMENT NAME: NATURAL BUTTES

1. TYPE OF WELL Gas Well

8. WELL NAME and NUMBER: NBU 1022-11A4CS

2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.

9. API NUMBER: 43047518050000

3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779 **PHONE NUMBER:** 720 929-6526

9. FIELD and POOL or WILDCAT: NATURAL BUTTES

4. LOCATION OF WELL
FOOTAGES AT SURFACE: 2411 FNL 1535 FEL
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SWNE Section: 11 Township: 10.0S Range: 22.0E Meridian: S

COUNTY: UINTAH

STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
☐ NOTICE OF INTENT Approximate date work will start:	☐ ACIDIZE	☐ ALTER CASING	☐ CASING REPAIR
☐ SUBSEQUENT REPORT Date of Work Completion:	☐ CHANGE TO PREVIOUS PLANS	☐ CHANGE TUBING	☐ CHANGE WELL NAME
✓ SPUD REPORT Date of Spud: 5/23/2012	☐ CHANGE WELL STATUS	☐ COMMINGLE PRODUCING FORMATIONS	☐ CONVERT WELL TYPE
☐ DRILLING REPORT Report Date:	☐ DEEPEN	☐ FRACTURE TREAT	☐ NEW CONSTRUCTION
	☐ OPERATOR CHANGE	☐ PLUG AND ABANDON	☐ PLUG BACK
	☐ PRODUCTION START OR RESUME	☐ RECLAMATION OF WELL SITE	☐ RECOMPLETE DIFFERENT FORMATION
	☐ REPERFORATE CURRENT FORMATION	☐ SIDETRACK TO REPAIR WELL	☐ TEMPORARY ABANDON
	☐ TUBING REPAIR	☐ VENT OR FLARE	☐ WATER DISPOSAL
	☐ WATER SHUTOFF	☐ SI TA STATUS EXTENSION	☐ APD EXTENSION
	☐ WILDCAT WELL DETERMINATION	☐ OTHER	OTHER:

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

MIRU TRIPPLE A BUCKET RIG. DRILLED 20" CONDUCTOR HOLE TO 40'. RAN 14" 36.7# SCHEDULE 10 PIPE. CMT W/28 SX READY MIX. SPUD WELL ON 05/23/2012 AT 1130 HRS.

Accepted by the Utah Division of Oil, Gas and Mining
FOR RECORD ONLY
May 30, 2012

NAME (PLEASE PRINT)	PHONE NUMBER	TITLE
Sheila Wopsock	435 781-7024	Regulatory Analyst
SIGNATURE		**DATE**
N/A		5/29/2012

RECEIVED: May. 29, 2012

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 6

ENTITY ACTION FORM

Operator: KERR McGEE OIL & GAS ONSHORE LP
Operator Account Number: N 2995
Address: 1368 SOUTH 1200 EAST
city VERNAL
state UT zip 84078
Phone Number: (435) 781-7024

Well 1

API Number	Well Name		QQ	Sec	Twp	Rng	County
4304751814	NBU 1022-11H1BS		SWNE	11	10S	22E	UINTAH
Action Code	**Current Entity Number**	**New Entity Number**	**Spud Date**			**Entity Assignment Effective Date**	
B	99999	2900	5/23/2012			5/30/2012	

Comments: MIRU TRIPPLE A BUCKET RIG. WSMVD
SPUD WELL ON 05/23/2012 AT 0900 HRS. BHL: SeNe

Well 2

API Number	Well Name		QQ	Sec	Twp	Rng	County
4304751805	NBU 1022-11A4CS		SWNE	11	10S	22E	UINTAH
Action Code	**Current Entity Number**	**New Entity Number**	**Spud Date**			**Entity Assignment Effective Date**	
B	99999	2900	5/23/2012			5/30/2012	

Comments: MIRU TRIPPLE A BUCKET RIG. WSMVD
SPUD WELL ON 05/23/2012 AT 1130 HRS. BHL: NeNe

Well 3

API Number	Well Name		QQ	Sec	Twp	Rng	County
4304751837	NBU 1022-11G1CS		SWNE	11	10S	22E	UINTAH
Action Code	**Current Entity Number**	**New Entity Number**	**Spud Date**			**Entity Assignment Effective Date**	
B	99999	2900	5/23/2012			5/30/2012	

Comments: MIRU TRIPPLE A BUCKET RIG. WSMVD
SPUD WELL ON 05/23/2012 AT 1500 HRS. BHL: SWNE

ACTION CODES:
- **A** - Establish new entity for new well (single well only)
- **B** - Add new well to existing entity (group or unit well)
- **C** - Re-assign well from one existing entity to another existing entity
- **D** - Re-assign well from one existing entity to a new entity
- **E** - Other (Explain in 'comments' section)

SHEILA WOPSOCK
Name (Please Print)
Signature
REGULATORY ANALYST
Title
5/29/2012
Date

RECEIVED
MAY 30 2012
Div. of Oil, Gas & Mining

(5/2000)

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS, AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

5.LEASE DESIGNATION AND SERIAL NUMBER: UO1197A-ST

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

7.UNIT or CA AGREEMENT NAME: NATURAL BUTTES

1. TYPE OF WELL Gas Well

8. WELL NAME and NUMBER: NBU 1022-11A4CS

2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.

9. API NUMBER: 43047518050000

3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779 **PHONE NUMBER:** 720 929-6526

9. FIELD and POOL or WILDCAT: NATURAL BUTTES

4. LOCATION OF WELL
FOOTAGES AT SURFACE: 2411 FNL 1535 FEL
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SWNE Section: 11 Township: 10.0S Range: 22.0E Meridian: S

COUNTY: UINTAH

STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
☐ NOTICE OF INTENT Approximate date work will start:	☐ ACIDIZE	☐ ALTER CASING	☐ CASING REPAIR
☐ SUBSEQUENT REPORT Date of Work Completion:	☐ CHANGE TO PREVIOUS PLANS	☐ CHANGE TUBING	☐ CHANGE WELL NAME
☐ SPUD REPORT Date of Spud:	☐ CHANGE WELL STATUS	☐ COMMINGLE PRODUCING FORMATIONS	☐ CONVERT WELL TYPE
✓ DRILLING REPORT Report Date: 7/2/2012	☐ DEEPEN	☐ FRACTURE TREAT	☐ NEW CONSTRUCTION
	☐ OPERATOR CHANGE	☐ PLUG AND ABANDON	☐ PLUG BACK
	☐ PRODUCTION START OR RESUME	☐ RECLAMATION OF WELL SITE	☐ RECOMPLETE DIFFERENT FORMATION
	☐ REPERFORATE CURRENT FORMATION	☐ SIDETRACK TO REPAIR WELL	☐ TEMPORARY ABANDON
	☐ TUBING REPAIR	☐ VENT OR FLARE	☐ WATER DISPOSAL
	☐ WATER SHUTOFF	☐ SI TA STATUS EXTENSION	☐ APD EXTENSION
	☐ WILDCAT WELL DETERMINATION	☐ OTHER	OTHER:

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

MIRU AIR RIG ON JUNE 30, 2012. DRILLED SURFACE HOLE TO 2295'. RAN SURFACE CASING AND CEMENTED. WELL IS WAITING ON ROTARY RIG. DETAILS OF CEMENT JOB WILL BE INCLUDED WITH WELL COMPLETION REPORT.

Accepted by the Utah Division of Oil, Gas and Mining
FOR RECORD ONLY
July 03, 2012

NAME (PLEASE PRINT)	PHONE NUMBER	TITLE
Jaime Scharnowske	720 929-6304	Regulartory Analyst
SIGNATURE N/A		**DATE** 7/3/2012

RECEIVED: Jul. 03, 2012

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS, AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

5.LEASE DESIGNATION AND SERIAL NUMBER: UO1197A-ST

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

7.UNIT or CA AGREEMENT NAME: NATURAL BUTTES

1. TYPE OF WELL Gas Well

8. WELL NAME and NUMBER: NBU 1022-11A4CS

2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.

9. API NUMBER: 43047518050000

3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779 **PHONE NUMBER:** 720 929-6526

9. FIELD and POOL or WILDCAT: NATURAL BUTTES

4. LOCATION OF WELL
FOOTAGES AT SURFACE: 2411 FNL 1535 FEL
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SWNE Section: 11 Township: 10.0S Range: 22.0E Meridian: S

COUNTY: UINTAH

STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
✓ NOTICE OF INTENT Approximate date work will start: 6/28/2012	☐ ACIDIZE	☐ ALTER CASING	☐ CASING REPAIR
	✓ CHANGE TO PREVIOUS PLANS	☐ CHANGE TUBING	☐ CHANGE WELL NAME
☐ SUBSEQUENT REPORT Date of Work Completion:	☐ CHANGE WELL STATUS	☐ COMMINGLE PRODUCING FORMATIONS	☐ CONVERT WELL TYPE
	☐ DEEPEN	☐ FRACTURE TREAT	☐ NEW CONSTRUCTION
	☐ OPERATOR CHANGE	☐ PLUG AND ABANDON	☐ PLUG BACK
☐ SPUD REPORT Date of Spud:	☐ PRODUCTION START OR RESUME	☐ RECLAMATION OF WELL SITE	☐ RECOMPLETE DIFFERENT FORMATION
	☐ REPERFORATE CURRENT FORMATION	☐ SIDETRACK TO REPAIR WELL	☐ TEMPORARY ABANDON
	☐ TUBING REPAIR	☐ VENT OR FLARE	☐ WATER DISPOSAL
☐ DRILLING REPORT Report Date:	☐ WATER SHUTOFF	☐ SI TA STATUS EXTENSION	☐ APD EXTENSION
	☐ WILDCAT WELL DETERMINATION	☐ OTHER	OTHER:

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

THE OPERATOR REQUESTS APPROVAL FOR A FIT WAIVER, A CLOSED LOOP DRILLING OPTION, AND A PRODUCTION CASING CHANGE. ALL OTHER ASPECTS OF THE PREVIOUSLY APPROVED DRILLING PLAN WILL NOT CHANGE. PLEASE SEE THE ATTACHMENT. THANK YOU.

Approved by the Utah Division of Oil, Gas and Mining

Date: July 12, 2012

By: Dark K Quist

NAME (PLEASE PRINT)	PHONE NUMBER	TITLE
Cara Mahler	720 929-6029	Regulatory Analyst I
SIGNATURE N/A		**DATE** 6/28/2012

RECEIVED: Jun. 28, 2012

Kerr-McGee Oil & Gas Onshore. L.P.

NBU 1022-11A4CS

Surface: 2411 FNL / 1535 FEL SWNE
BHL: 1075 FNL / 490 FEL NENE

Section 11 T10S R22E

Uintah County, Utah
Mineral Lease: UO1197A-ST

ONSHORE ORDER NO. 1

DRILLING PROGRAM

1. & 2. **Estimated Tops of Important Geologic Markers:**
Estimated Depths of Anticipated Water, Oil, Gas, or Mineral Formations:

Formation	Depth	Resource
Uinta	0 - Surface	
Green River	#REF!	
Birds Nest	0,955'	Water
Mahogany	1,252'	Water
Wasatch	1,615'	Gas
Mesaverde	4,031'	Gas
Sego	6,252'	Gas
TVD	8,426'	
TD	8,705'	

3. **Pressure Control Equipment** (Schematic Attached)

Please refer to the attached Drilling Program

4. **Proposed Casing & Cementing Program:**

Please refer to the attached Drilling Program

5. **Drilling Fluids Program:**

Please refer to the attached Drilling Program

6. **Evaluation Program:**

Please refer to the attached Drilling Program

RECEIVED: Jun. 28, 2012

7. Abnormal Conditions:

Maximum anticipated bottom hole pressure calculated at 8426' TVD, approximately equals 5,140 psi (0.61 psi/ft = actual bottomhole gradient)

Maximum Anticipated Bottom Hole Pressure (MABHP) = Pore Pressure at TD

Maximum anticipated surface pressure equals approximately 3,308 psi (bottom hole pressure minus the pressure of a partially evacuated hole calculated at 0.22 psi/foot, per Onshore Order No. 2).

Per Onshore Order No. 2 - Max Anticipated Surf. Press.(MASP) = (Pore Pressure at next csg point-
(0.22 psi/ft-partial evac gradient x TVD of next csg point))

8. Anticipated Starting Dates:

Drilling is planned to commence immediately upon approval of this application.

9. Variances:

Please refer to the attached Drilling Program.
Onshore Order #2 – Air Drilling Variance

Kerr-McGee Oil & Gas Onshore LP (KMG) respectfully requests a variance to several requirements associated with air drilling outlined in Onshore Order 2

- Blowout Prevention Equipment (BOPE) requirements;
- Mud program requirements; and
- Special drilling operation (surface equipment placement) requirements associated with air drilling.

This Standard Operating Practices addendum provides supporting information as to why KMG current air drilling practices for constructing the surface casing hole should be granted a variance to Onshore Order 2 air drilling requirements.

The reader should note that the air rig is used only to construct a stable surface casing hole through a historically difficult lost circulation zone. A conventional rotary rig follows the air rig, and is used to drill and construct the majority of the wellbore.

More notable, KMG has used the air rig layout and procedures outlined below to drill the surface casing hole in approximately 675 wells without incident of blow out or loss of life.

Background

In a typical well, KMG utilizes an air rig for drilling the surface casing hole, an interval from the surface to surface casing depths, which varies in depth from 1,700 to 2,800 feet. The air rig drilling operation does not drill through productive or over pressured formations in KMG field, but does penetrate the Uinta and Green River Formations. The purpose of the air drilling operation is to overcome the severe loss circulation zone in the Green River known as the Bird's Nest while creating a stable hole for the surface casing. The surface casing hole is generally drilled to approximately 500 feet below the Bird's Nest.

RECEIVED: Jun. 28, 2012

Before the surface air rig is mobilized, a rathole rig is utilized to set and cement conductor pipe through a competent surface formation. Generally, the conductor is set at 40 feet. In some cases, conductor may be set deeper in areas that the surface formation is not found competent. This rig also drills the rat and mouse holes in preparation for the surface casing and production string drilling operations.

The air rig is then mobilized to drill the surface casing hole by drilling a 12 1/4 inch hole for the first 200 feet, then will drill a 11inch hole to just above the Bird's Nest interval with an air hammer. The hammer is then tripped and replaced with a 11 inch tri-cone bit. The tri-cone bit is used to drill to the surface casing point, approximately 500 feet below the loss circulation zone (Bird's Nest). The 8-5/8 inch surface casing is then run and cemented in place, thereby isolating the lost circulation zone.

KMG fully appreciates Onshore Order 2 well control and safety requirements associated with a typical air drilling operations. However, the requirements of Onshore Order 2 are excessive with respect to the air rig layout and drilling operation procedures that are currently in practice to drill and control the surface casing hole in KMG Fields.

Variance for BOPE Requirements
The air rig operation utilizes a properly lubricated and maintained air bowl diverter system which diverts the drilling returns to a six-inch blooie line. The air bowl is the only piece of BOPE equipment which is installed during drilling operations and is sufficient to contain the air returns associated with this drilling operation. As was discussed earlier, the drilling of the surface hole does not encounter any over pressured or productive zones, and as a result standard BOPE equipment should not be required. In addition, standard drilling practices do not support the use of BOPE on 40 feet of conductor pipe.

Variance for Mud Material Requirements
Onshore Order 2 also states that sufficient quantities of mud materials shall be maintained or readily accessible for the purpose of assuring adequate well control. Once again, the surface hole drilling operations does not encounter over pressured or productive intervals, and as a result there is not a need to control pressure in the surface hole with a mud system. Instead of mud, the air rigs utilize water from the reserve pit for well control, if necessary. A skid pump which is located near the reserve pit (see attachment) will supply the water to the well bore.

Variance for Special Drilling Operation (surface equipment placement) Requirements
Onshore Order 2 requires specific safety distances or setbacks for the placement of associated standard air drilling equipment, wellbore, and reserve pits. The air rigs used to drill the surface holes are not typical of an air rig used to drill a producing hole in other parts of the US. These are smaller in nature and designed to fit a KMG location. The typical air rig layout for drilling surface hole in the field is attached.

Typically the blooie line discharge point is required to be 100 feet from the well bore. In the case of a KMG well, the reserve pit is only 45 feet from the rig and is used for the drill cuttings. The blooie line, which transports the drill cuttings from the well to the reserve pit, subsequently discharges only 45 feet from the well bore.

Typically the air rig compressors are required to be located in the opposite direction from the blooie line and a minimum of 100 feet from the well bore. At the KMG locations, the air rig compressors are approximately 40 feet from the well bore and approximately 60 feet from the blooie line discharge due to the unique air rig design. The air compressors (see attachment) are located on the rig (1250 cfm) and

on a standby trailer (1170 cfm). A booster sits between the two compressors and boosts the output from 350 psi to 2000 psi. The design does put the booster and standby compressor opposite from the blooie line.

Lastly, Onshore Order 2 addresses the need for an automatic igniter or continuous pilot light on the blooie line. The air rig does not utilize an igniter as the surface hole drilling operation does not encounter productive formations.

Variance for FIT Requirements

KMG also respectfully requests a variance to Onshore Order 2, Section III, Part Bi, for the pressure integrity test (PIT, also known as a formation integrity test (FIT)). This well is not an exploratory well and is being drilled in an area where the formation integrity is well known. Additionally, when an FIT is run with the mud weight as required, the casing shoe frequently breaks down and causes subsequent lost circulation when drilling the entire depth of the well.

Conclusion

The air rig operating procedures and the attached air rig layout have effectively maintained well control while drilling the surface holes in KMG Fields. KMG respectfully requests a variance from Onshore Order 2 with respect to air drilling well control requirements as discussed above.

10. Other Information:

Please refer to the attached Drilling Program.

KERR-McGEE OIL & GAS ONSHORE LP

DRILLING PROGRAM

COMPANY NAME	KERR-McGEE OIL & GAS ONSHORE LP		DATE	June 28, 2012	
WELL NAME	**NBU 1022-11A4CS**		TD	8,426' TVD	8,705' MD
FIELD	Natural Buttes	COUNTY Uintah	STATE Utah	FINISHED ELEVATION	5044.8
SURFACE LOCATION	SWNE	2411 FNL	1535 FEL	Sec 11 T 10S	R 22E
	Latitude:	39.964115	Longitude:	-109.402537	NAD 27
BTM HOLE LOCATION	NENE	1075 FNL	490 FEL	Sec 11 T 10S	R 22E
	Latitude:	39.967781	Longitude:	-109.398773	NAD 27
OBJECTIVE ZONE(S)	Wasatch/Mesaverde				
ADDITIONAL INFO	Regulatory Agencies: UDOGM (Minerals), UDOGM (Surface), UDOGM Tri-County Health Dept.				

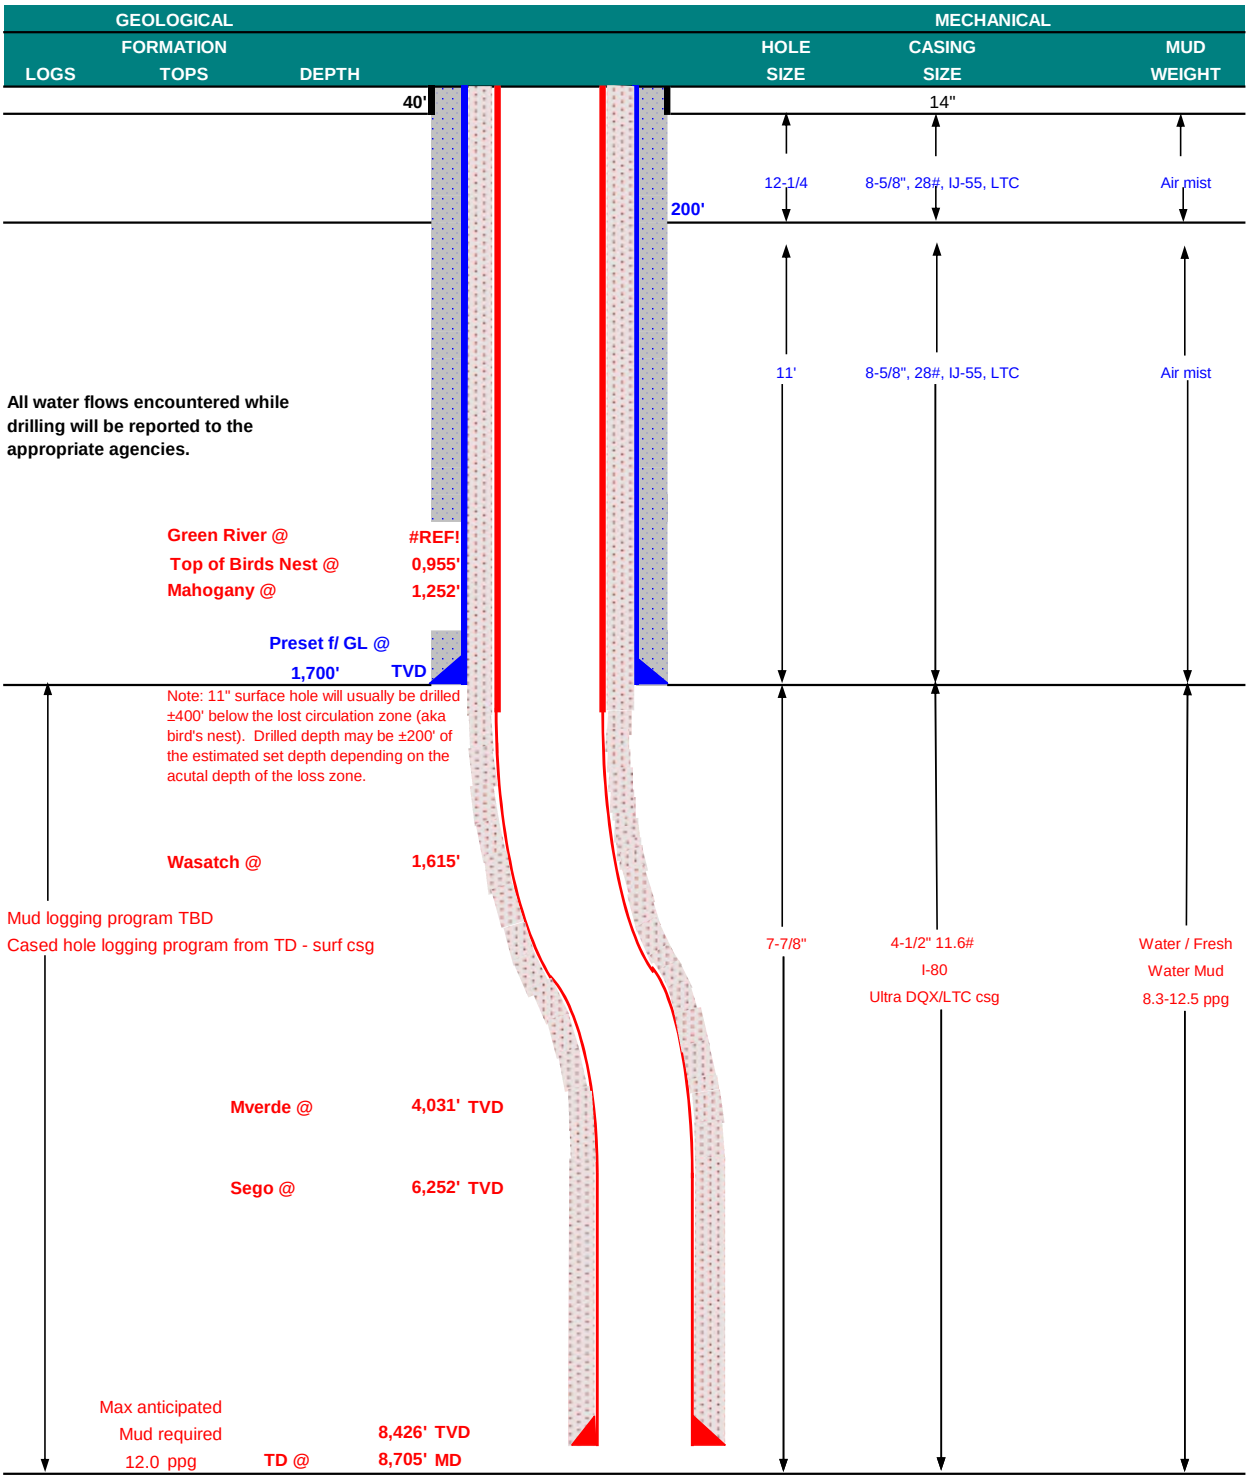

KERR-McGEE OIL & GAS ONSHORE LP

DRILLING PROGRAM

CASING PROGRAM

	SIZE	INTERVAL			WT.	GR.	CPLG.	DESIGN FACTORS BURST	COLLAPSE	LTC	DQX TENSION
CONDUCTOR	14"	0-40'									
								3,390	1,880	348,000	N/A
SURFACE	8-5/8"	0	to	1,700	28.00	IJ-55	LTC	3.18	2.36	8.35	N/A
								7,780	6,350	223,000	267,035
PRODUCTION	4-1/2"	0	to	5,000	11.60	I-80	DQX	1.11	1.21		3.24
								7,780	6,350	223,000	267,035
	4-1/2"	5,000	to	8,705'	11.60	I-80	LTC	1.11	1.21	6.35	

Surface Casing:

(Burst Assumptions: TD = 12.0 ppg) 0.73 psi/ft = frac gradient @ surface shoe

Fracture at surface shoe with 0.1 psi/ft gas gradient above

(Collapse Assumption: Fully Evacuated Casing, Max MW) (Tension Assumptions: Air Weight of Casing*Buoy.Fact. of water)

Production casing:

(Burst Assumptions: Pressure test with 8.4ppg @ 7000 psi) 0.61 psi/ft = bottomhole gradient

(Collapse Assumption: Fully Evacuated Casing, Max MW) (Tension Assumptions: Air Weight of Casing*Buoy.Fact. of water)

CEMENT PROGRAM

		FT. OF FILL	DESCRIPTION	SACKS	EXCESS	WEIGHT		YIELD
SURFACE	LEAD	500'	Premium cmt + 2% CaCl	180	60%	15.80		1.15
Option 1			+ 0.25 pps flocele					
	TOP OUT CMT (6 jobs)	1,200'	20 gals sodium silicate + Premium cmt	270	0%	15.80		1.15
			+ 2% CaCl + 0.25 pps flocele					
SURFACE			**NOTE: If well will circulate water to surface, option 2 will be utilized**					
Option 2	LEAD	1,200'	65/35 Poz + 6% Gel + 10 pps gilsonite	110	35%	11.00		3.82
			+ 0.25 pps Flocele + 3% salt BWOW					
	TAIL	500'	Premium cmt + 2% CaCl	150	35%	15.80		1.15
			+ 0.25 pps flocele					
	TOP OUT CMT	as required	Premium cmt + 2% CaCl	as req.		15.80		1.15
PRODUCTION	LEAD	1,115'	Premium Lite II +0.25 pps	70	35%	12.00		3.38
			celloflake + 5 pps gilsonite + 10% gel					
			+ 0.5% extender					
	TAIL	7,590'	50/50 Poz/G + 10% salt + 2% gel	1,790	35%	14.30		1.31
			+ 0.1% R-3					

*Substitute caliper hole volume plus 0% excess for LEAD if accurate caliper is obtained

*Substitute caliper hole volume plus 10% excess for TAIL if accurate caliper is obtained

FLOAT EQUIPMENT & CENTRALIZERS

SURFACE	Guide shoe, 1 jt, insert float. Centralize first 3 joints with bow spring centralizers. Thread lock guide shoe
PRODUCTION	Float shoe, 1 jt, float collar. 15 centralizers for a Mesaverde and 20 for a Blackhawk well. 1 centralizer on the first 3 joints and one every third joint thereafter.

ADDITIONAL INFORMATION

Test casing head to 750 psi after installing. Test surface casing to 1,500 psi prior to drilling out.

BOPE: 11" 5M with one annular and 2 rams. The BOPE will be installed before the production hole is drilled and tested to 5,000 psi (annular to 2,500 psi) prior to drilling out the surface casing shoe. Record on chart recorder and tour sheet. Function test rams on each trip. Maintain safety valve and inside BOP on rig floor at all times. Most rigs have top drives; however, if used, the Kelly is to be equipped with upper and lower kelly valves.

Surveys will be taken at 1,000' minimum intervals.

Most rigs have PVT System for mud monitoring. If no PVT is available, visual monitoring will be utilized.

DRILLING ENGINEER: _____ **DATE:** _____

Nick Spence / Danny Showers / Travis Hansell

DRILLING SUPERINTENDENT: _____ **DATE:** _____

Kenny Gathings / Lovel Young

RECEIVED: Jun. 28, 2012

EXHIBIT A
NBU 1022-11A4CS

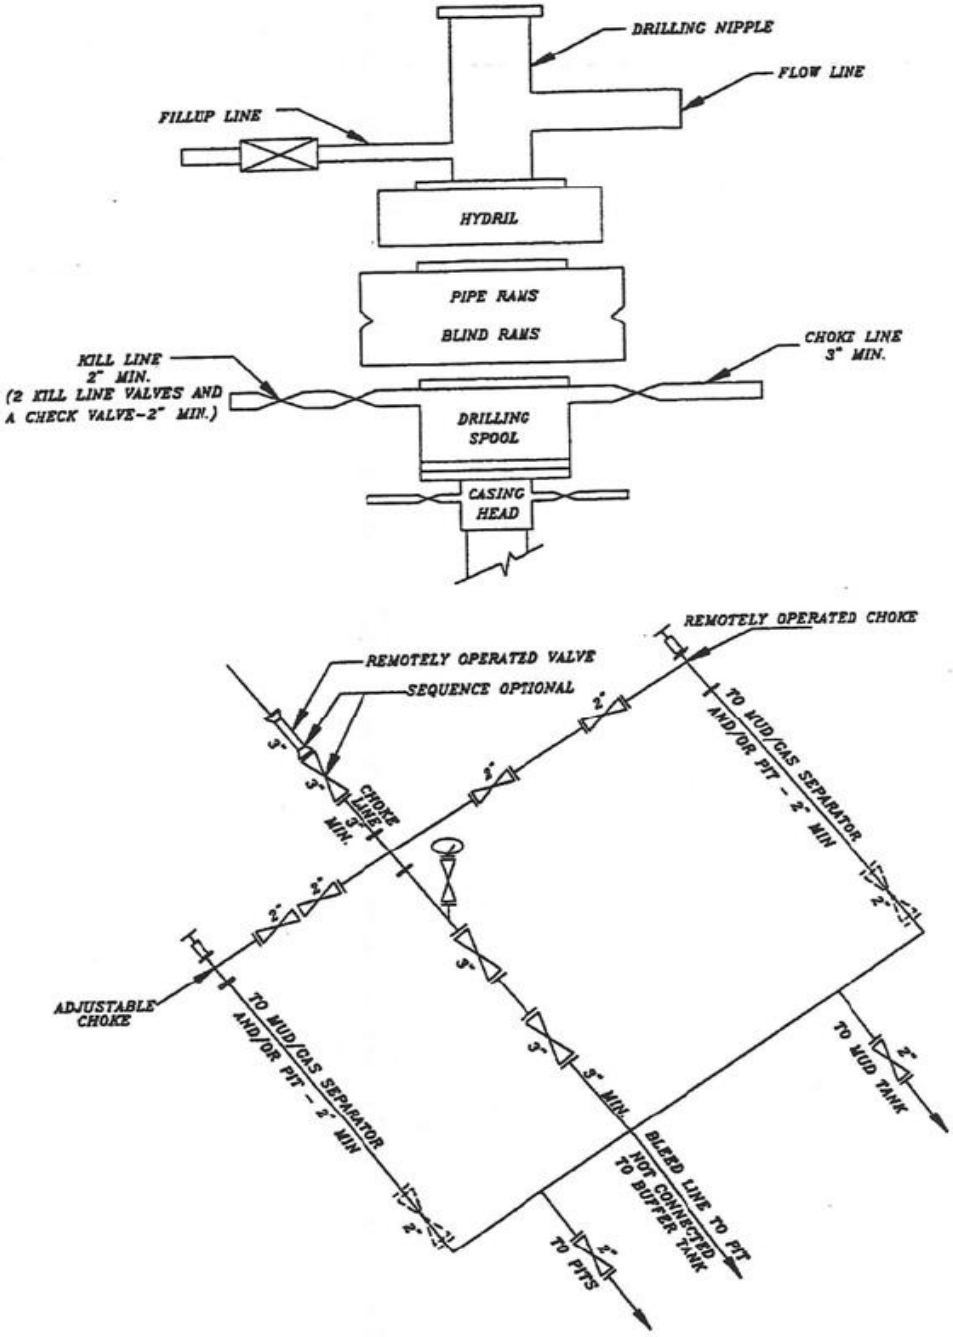

SCHEMATIC DIAGRAM OF 5,000 PSI BOP STACK

RECEIVED: Jun. 28, 2012

Requested Drilling Options:

Kerr-McGee will use either a closed loop drilling system that will require one pit and one cuttings storage area to be constructed on the drilling pad or a traditional drilling operation with one pit used for drilling and completion operations. The cuttings storage area will be used to contain only the de-watered drill cuttings and will be lined and bermed to prevent any liquid runoff. The drill cuttings will be buried in the completion pit once completion operations are completed according to traditional pit closure standards. The pit will be constructed to allow for completion operations. The completion operations pit will be lined with a synthetic material 20 mil or thicker and will be used for the completing of the wells on the pad or used as part of our Aandarko Completions Transportation System (ACTS). Using the closed loop drilling system will allow Kerr-McGee to decrease the amount of disturbance/footprint on location compared to a single large drilling/completions pit.

If Kerr-McGee does not use a closed loop drilling system, it will construct a traditional drilling/completions pit to contain drill cuttings and for use in completion operations. The pit will be lined with a synthetic material 20 mil or thicker. The drill cuttings will be buried in the pit using traditional pit closure standards.

RECEIVED: Jun. 28, 2012

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS, AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

5.LEASE DESIGNATION AND SERIAL NUMBER: UO1197A-ST

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

7.UNIT or CA AGREEMENT NAME: NATURAL BUTTES

1. TYPE OF WELL Gas Well

8. WELL NAME and NUMBER: NBU 1022-11A4CS

2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.

9. API NUMBER: 43047518050000

3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779 **PHONE NUMBER:** 720 929-6515

9. FIELD and POOL or WILDCAT: NATURAL BUTTES

4. LOCATION OF WELL
FOOTAGES AT SURFACE: 2411 FNL 1535 FEL
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SWNE Section: 11 Township: 10.0S Range: 22.0E Meridian: S

COUNTY: UINTAH

STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
☐ NOTICE OF INTENT Approximate date work will start:	☐ ACIDIZE	☐ ALTER CASING	☐ CASING REPAIR
☐ SUBSEQUENT REPORT Date of Work Completion:	☐ CHANGE TO PREVIOUS PLANS	☐ CHANGE TUBING	☐ CHANGE WELL NAME
☐ SPUD REPORT Date of Spud:	☐ CHANGE WELL STATUS	☐ COMMINGLE PRODUCING FORMATIONS	☐ CONVERT WELL TYPE
✓ DRILLING REPORT Report Date: 9/5/2012	☐ DEEPEN	☐ FRACTURE TREAT	☐ NEW CONSTRUCTION
	☐ OPERATOR CHANGE	☐ PLUG AND ABANDON	☐ PLUG BACK
	☐ PRODUCTION START OR RESUME	☐ RECLAMATION OF WELL SITE	☐ RECOMPLETE DIFFERENT FORMATION
	☐ REPERFORATE CURRENT FORMATION	☐ SIDETRACK TO REPAIR WELL	☐ TEMPORARY ABANDON
	☐ TUBING REPAIR	☐ VENT OR FLARE	☐ WATER DISPOSAL
	☐ WATER SHUTOFF	☐ SI TA STATUS EXTENSION	☐ APD EXTENSION
	☐ WILDCAT WELL DETERMINATION	☐ OTHER	OTHER:

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

No Activity for the month of August 2012. Well TD at 2,295

Accepted by the
Utah Division of
Oil, Gas and Mining
FOR RECORD ONLY
September 10, 2012

NAME (PLEASE PRINT)	PHONE NUMBER	TITLE
Lindsey Frazier	720 929-6857	Regulatory Analyst II
SIGNATURE		**DATE**
N/A		9/5/2012

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS, AND MINING

FORM 9

5.LEASE DESIGNATION AND SERIAL NUMBER:
UO1197A-ST

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

7.UNIT or CA AGREEMENT NAME:
NATURAL BUTTES

1. TYPE OF WELL
Gas Well

8. WELL NAME and NUMBER:
NBU 1022-11A4CS

2. NAME OF OPERATOR:
KERR-MCGEE OIL & GAS ONSHORE, L.P.

9. API NUMBER:
43047518050000

3. ADDRESS OF OPERATOR:
P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779

PHONE NUMBER:
720 929-6526

9. FIELD and POOL or WILDCAT:
NATURAL BUTTES

4. LOCATION OF WELL
FOOTAGES AT SURFACE:
2411 FNL 1535 FEL
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:
Qtr/Qtr: SWNE Section: 11 Township: 10.0S Range: 22.0E Meridian: S

COUNTY:
UINTAH

STATE:
UTAH

11.
CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
☐ NOTICE OF INTENT Approximate date work will start:	☐ ACIDIZE	☐ ALTER CASING	☐ CASING REPAIR
☐ SUBSEQUENT REPORT Date of Work Completion:	☐ CHANGE TO PREVIOUS PLANS	☐ CHANGE TUBING	☐ CHANGE WELL NAME
☐ SPUD REPORT Date of Spud:	☐ CHANGE WELL STATUS	☐ COMMINGLE PRODUCING FORMATIONS	☐ CONVERT WELL TYPE
✓ DRILLING REPORT Report Date: 10/2/2012	☐ DEEPEN	☐ FRACTURE TREAT	☐ NEW CONSTRUCTION
	☐ OPERATOR CHANGE	☐ PLUG AND ABANDON	☐ PLUG BACK
	☐ PRODUCTION START OR RESUME	☐ RECLAMATION OF WELL SITE	☐ RECOMPLETE DIFFERENT FORMATION
	☐ REPERFORATE CURRENT FORMATION	☐ SIDETRACK TO REPAIR WELL	☐ TEMPORARY ABANDON
	☐ TUBING REPAIR	☐ VENT OR FLARE	☐ WATER DISPOSAL
	☐ WATER SHUTOFF	☐ SI TA STATUS EXTENSION	☐ APD EXTENSION
	☐ WILDCAT WELL DETERMINATION	☐ OTHER	OTHER:

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

No Activity for the month of September 2012. Well TD at 8,815.

Accepted by the
Utah Division of
Oil, Gas and Mining
FOR RECORD ONLY
October 02, 2012

NAME (PLEASE PRINT)	PHONE NUMBER	TITLE
Lindsey Frazier	720 929-6857	Regulatory Analyst II
SIGNATURE		**DATE**
N/A		10/2/2012

RECEIVED: Oct. 02, 2012

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS, AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

5.LEASE DESIGNATION AND SERIAL NUMBER: UO1197A-ST

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

7.UNIT or CA AGREEMENT NAME: NATURAL BUTTES

1. TYPE OF WELL Gas Well

8. WELL NAME and NUMBER: NBU 1022-11A4CS

2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.

9. API NUMBER: 43047518050000

3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779 **PHONE NUMBER:** 720 929-6526

9. FIELD and POOL or WILDCAT: NATURAL BUTTES

4. LOCATION OF WELL
FOOTAGES AT SURFACE: 2411 FNL 1535 FEL
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SWNE Section: 11 Township: 10.0S Range: 22.0E Meridian: S

COUNTY: UINTAH

STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
☐ NOTICE OF INTENT Approximate date work will start:	☐ ACIDIZE	☐ ALTER CASING	☐ CASING REPAIR
☐ SUBSEQUENT REPORT Date of Work Completion:	☐ CHANGE TO PREVIOUS PLANS	☐ CHANGE TUBING	☐ CHANGE WELL NAME
☐ SPUD REPORT Date of Spud:	☐ CHANGE WELL STATUS	☐ COMMINGLE PRODUCING FORMATIONS	☐ CONVERT WELL TYPE
✓ DRILLING REPORT Report Date: 9/29/2012	☐ DEEPEN	☐ FRACTURE TREAT	☐ NEW CONSTRUCTION
	☐ OPERATOR CHANGE	☐ PLUG AND ABANDON	☐ PLUG BACK
	☐ PRODUCTION START OR RESUME	☐ RECLAMATION OF WELL SITE	☐ RECOMPLETE DIFFERENT FORMATION
	☐ REPERFORATE CURRENT FORMATION	☐ SIDETRACK TO REPAIR WELL	☐ TEMPORARY ABANDON
	☐ TUBING REPAIR	☐ VENT OR FLARE	☐ WATER DISPOSAL
	☐ WATER SHUTOFF	☐ SI TA STATUS EXTENSION	☐ APD EXTENSION
	☐ WILDCAT WELL DETERMINATION	☐ OTHER	OTHER:

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

FINISHED DRILLING TO 8,815' ON 09/28/2012. CEMENTED PRODUCTION CASING. RELEASED PIONEER 54 RIG ON 09/29/2012. DETAILS OF CASING AND CEMENT WILL BE INCLUDED WITH THE WELL COMPLETION REPORT. WELL IS WAITING ON FINAL COMPLETION ACTIVITIES

Accepted by the Utah Division of Oil, Gas and Mining
FOR RECORD ONLY
October 02, 2012

NAME (PLEASE PRINT)	PHONE NUMBER	TITLE
Lindsey Frazier	720 929-6857	Regulatory Analyst II
SIGNATURE N/A		**DATE** 10/1/2012

State of Utah - Notification Form

Operator Anadarko Petroleum Rig Name/# PIONEER 54
Submitted By KENNY MORRIS Phone Number 435-790-2921
Well Name/Number NBU 1022-11A4CS
Qtr/Qtr SW/NE Section 11 Township 10S Range 22E
Lease Serial Number UO1197A-ST
API Number 43047518050000

Casing – Time casing run starts, not cementing times.

☒ Production Casing
☐ Other

Date/Time 9/28/12 6 AM ☒ PM ☐

BOPE
☐ Initial BOPE test at surface casing point
☐ Other

Date/Time _ _ AM ☐ PM ☐

Rig Move
Location To:

Date/Time _ _ AM ☐ PM ☐

RECEIVED
SEP 27 2012
DIV. OF OIL, GAS & MINING

Remarks _____

FORM 9

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS, AND MINING

5.LEASE DESIGNATION AND SERIAL NUMBER: UO1197A-ST

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

7.UNIT or CA AGREEMENT NAME: NATURAL BUTTES

1. TYPE OF WELL Gas Well

8. WELL NAME and NUMBER: NBU 1022-11A4CS

2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.

9. API NUMBER: 43047518050000

3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779 **PHONE NUMBER:** 720 929-6515

9. FIELD and POOL or WILDCAT: NATURAL BUTTES

4. LOCATION OF WELL
FOOTAGES AT SURFACE: 2411 FNL 1535 FEL
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SWNE Section: 11 Township: 10.0S Range: 22.0E Meridian: S

COUNTY: UINTAH

STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
☐ NOTICE OF INTENT Approximate date work will start:	☐ ACIDIZE	☐ ALTER CASING	☐ CASING REPAIR
☐ SUBSEQUENT REPORT Date of Work Completion:	☐ CHANGE TO PREVIOUS PLANS	☐ CHANGE TUBING	☐ CHANGE WELL NAME
☐ SPUD REPORT Date of Spud:	☐ CHANGE WELL STATUS	☐ COMMINGLE PRODUCING FORMATIONS	☐ CONVERT WELL TYPE
✓ DRILLING REPORT Report Date: 12/3/2012	☐ DEEPEN	☐ FRACTURE TREAT	☐ NEW CONSTRUCTION
	☐ OPERATOR CHANGE	☐ PLUG AND ABANDON	☐ PLUG BACK
	☐ PRODUCTION START OR RESUME	☐ RECLAMATION OF WELL SITE	☐ RECOMPLETE DIFFERENT FORMATION
	☐ REPERFORATE CURRENT FORMATION	☐ SIDETRACK TO REPAIR WELL	☐ TEMPORARY ABANDON
	☐ TUBING REPAIR	☐ VENT OR FLARE	☐ WATER DISPOSAL
	☐ WATER SHUTOFF	☐ SI TA STATUS EXTENSION	☐ APD EXTENSION
	☐ WILDCAT WELL DETERMINATION	☐ OTHER	OTHER:

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

No Activity for the month of November 2012. Well TD at 8,815.

Accepted by the Utah Division of Oil, Gas and Mining
FOR RECORD ONLY
December 04, 2012

NAME (PLEASE PRINT)	PHONE NUMBER	TITLE
Jaime Scharnowske	720 929-6304	Regulartory Analyst
SIGNATURE N/A		**DATE** 12/3/2012

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS, AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

5.LEASE DESIGNATION AND SERIAL NUMBER: UO1197A-ST

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

7.UNIT or CA AGREEMENT NAME: NATURAL BUTTES

1. TYPE OF WELL Gas Well

8. WELL NAME and NUMBER: NBU 1022-11A4CS

2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.

9. API NUMBER: 43047518050000

3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779 **PHONE NUMBER:** 720 929-6526

9. FIELD and POOL or WILDCAT: NATURAL BUTTES

4. LOCATION OF WELL
FOOTAGES AT SURFACE: 2411 FNL 1535 FEL
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SWNE Section: 11 Township: 10.0S Range: 22.0E Meridian: S

COUNTY: UINTAH

STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
☐ NOTICE OF INTENT Approximate date work will start:	☐ ACIDIZE	☐ ALTER CASING	☐ CASING REPAIR
☐ SUBSEQUENT REPORT Date of Work Completion:	☐ CHANGE TO PREVIOUS PLANS	☐ CHANGE TUBING	☐ CHANGE WELL NAME
☐ SPUD REPORT Date of Spud:	☐ CHANGE WELL STATUS	☐ COMMINGLE PRODUCING FORMATIONS	☐ CONVERT WELL TYPE
✓ DRILLING REPORT Report Date: 1/3/2013	☐ DEEPEN	☐ FRACTURE TREAT	☐ NEW CONSTRUCTION
	☐ OPERATOR CHANGE	☐ PLUG AND ABANDON	☐ PLUG BACK
	☐ PRODUCTION START OR RESUME	☐ RECLAMATION OF WELL SITE	☐ RECOMPLETE DIFFERENT FORMATION
	☐ REPERFORATE CURRENT FORMATION	☐ SIDETRACK TO REPAIR WELL	☐ TEMPORARY ABANDON
	☐ TUBING REPAIR	☐ VENT OR FLARE	☐ WATER DISPOSAL
	☐ WATER SHUTOFF	☐ SI TA STATUS EXTENSION	☐ APD EXTENSION
	☐ WILDCAT WELL DETERMINATION	☐ OTHER	OTHER:

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

No Activity for the month of December 2012. Well TD at 8,815

Accepted by the
Utah Division of
Oil, Gas and Mining
FOR RECORD ONLY
January 07, 2013

NAME (PLEASE PRINT)	PHONE NUMBER	TITLE
Lindsey Frazier	720 929-6857	Regulatory Analyst II
SIGNATURE N/A		**DATE** 1/3/2013

RECEIVED: Jan. 03, 2013

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS, AND MINING

FORM 9

5.LEASE DESIGNATION AND SERIAL NUMBER:
UO1197A-ST

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

7.UNIT or CA AGREEMENT NAME:
NATURAL BUTTES

1. TYPE OF WELL
Gas Well

8. WELL NAME and NUMBER:
NBU 1022-11A4CS

2. NAME OF OPERATOR:
KERR-MCGEE OIL & GAS ONSHORE, L.P.

9. API NUMBER:
43047518050000

3. ADDRESS OF OPERATOR:
P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779

PHONE NUMBER:
720 929-6526

9. FIELD and POOL or WILDCAT:
NATURAL BUTTES

4. LOCATION OF WELL
FOOTAGES AT SURFACE:
2411 FNL 1535 FEL
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:
Qtr/Qtr: SWNE Section: 11 Township: 10.0S Range: 22.0E Meridian: S

COUNTY:
UINTAH

STATE:
UTAH

11.
CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
☐ NOTICE OF INTENT Approximate date work will start:	☐ ACIDIZE	☐ ALTER CASING	☐ CASING REPAIR
☐ SUBSEQUENT REPORT Date of Work Completion:	☐ CHANGE TO PREVIOUS PLANS	☐ CHANGE TUBING	☐ CHANGE WELL NAME
☐ SPUD REPORT Date of Spud:	☐ CHANGE WELL STATUS	☐ COMMINGLE PRODUCING FORMATIONS	☐ CONVERT WELL TYPE
✓ DRILLING REPORT Report Date: 2/4/2013	☐ DEEPEN	☐ FRACTURE TREAT	☐ NEW CONSTRUCTION
	☐ OPERATOR CHANGE	☐ PLUG AND ABANDON	☐ PLUG BACK
	☐ PRODUCTION START OR RESUME	☐ RECLAMATION OF WELL SITE	☐ RECOMPLETE DIFFERENT FORMATION
	☐ REPERFORATE CURRENT FORMATION	☐ SIDETRACK TO REPAIR WELL	☐ TEMPORARY ABANDON
	☐ TUBING REPAIR	☐ VENT OR FLARE	☐ WATER DISPOSAL
	☐ WATER SHUTOFF	☐ SI TA STATUS EXTENSION	☐ APD EXTENSION
	☐ WILDCAT WELL DETERMINATION	☐ OTHER	OTHER:

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Started completing the well. Well TD at 8,815

Accepted by the
Utah Division of
Oil, Gas and Mining
FOR RECORD ONLY
February 07, 2013

NAME (PLEASE PRINT)	PHONE NUMBER	TITLE
Laura Abrams	720 929-6356	Regulatory Analyst II
SIGNATURE		**DATE**
N/A		2/4/2013

RECEIVED: Feb. 04, 2013

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS, AND MINING

FORM 9

5.LEASE DESIGNATION AND SERIAL NUMBER:
UO1197A-ST

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

7.UNIT or CA AGREEMENT NAME:
NATURAL BUTTES

1. TYPE OF WELL
Gas Well

8. WELL NAME and NUMBER:
NBU 1022-11A4CS

2. NAME OF OPERATOR:
KERR-MCGEE OIL & GAS ONSHORE, L.P.

9. API NUMBER:
43047518050000

3. ADDRESS OF OPERATOR:
P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779

PHONE NUMBER:
720 929-6526

9. FIELD and POOL or WILDCAT:
NATURAL BUTTES

4. LOCATION OF WELL
FOOTAGES AT SURFACE:
2411 FNL 1535 FEL
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:
Qtr/Qtr: SWNE Section: 11 Township: 10.0S Range: 22.0E Meridian: S

COUNTY:
UINTAH

STATE:
UTAH

11.
CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
☐ NOTICE OF INTENT Approximate date work will start:	☐ ACIDIZE	☐ ALTER CASING	☐ CASING REPAIR
☐ SUBSEQUENT REPORT Date of Work Completion:	☐ CHANGE TO PREVIOUS PLANS	☐ CHANGE TUBING	☐ CHANGE WELL NAME
☐ SPUD REPORT Date of Spud:	☐ CHANGE WELL STATUS	☐ COMMINGLE PRODUCING FORMATIONS	☐ CONVERT WELL TYPE
✓ DRILLING REPORT Report Date: 2/7/2013	☐ DEEPEN	☐ FRACTURE TREAT	☐ NEW CONSTRUCTION
	☐ OPERATOR CHANGE	☐ PLUG AND ABANDON	☐ PLUG BACK
	✓ PRODUCTION START OR RESUME	☐ RECLAMATION OF WELL SITE	☐ RECOMPLETE DIFFERENT FORMATION
	☐ REPERFORATE CURRENT FORMATION	☐ SIDETRACK TO REPAIR WELL	☐ TEMPORARY ABANDON
	☐ TUBING REPAIR	☐ VENT OR FLARE	☐ WATER DISPOSAL
	☐ WATER SHUTOFF	☐ SI TA STATUS EXTENSION	☐ APD EXTENSION
	☐ WILDCAT WELL DETERMINATION	☐ OTHER	OTHER:

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

The subject well was placed on production on 02/07/2013. The Chronological Well History will be submitted with the well completion report.

Accepted by the
Utah Division of
Oil, Gas and Mining
FOR RECORD ONLY
February 21, 2013

NAME (PLEASE PRINT)	PHONE NUMBER	TITLE
Lindsey Frazier	720 929-6857	Regulatory Analyst II
SIGNATURE		**DATE**
N/A		2/12/2013

RECEIVED: Feb. 12, 2013

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS, AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

5.LEASE DESIGNATION AND SERIAL NUMBER: UO1197A-ST

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

7.UNIT or CA AGREEMENT NAME: NATURAL BUTTES

1. TYPE OF WELL Gas Well

8. WELL NAME and NUMBER: NBU 1022-11A4CS

2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.

9. API NUMBER: 43047518050000

3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779 **PHONE NUMBER:** 720 929-6526

9. FIELD and POOL or WILDCAT: NATURAL BUTTES

4. LOCATION OF WELL
FOOTAGES AT SURFACE: 2411 FNL 1535 FEL
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SWNE Section: 11 Township: 10.0S Range: 22.0E Meridian: S

COUNTY: UINTAH

STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
☐ NOTICE OF INTENT Approximate date work will start:	☐ ACIDIZE	☐ ALTER CASING	☐ CASING REPAIR
☐ SUBSEQUENT REPORT Date of Work Completion:	☐ CHANGE TO PREVIOUS PLANS	☐ CHANGE TUBING	☐ CHANGE WELL NAME
☐ SPUD REPORT Date of Spud:	☐ CHANGE WELL STATUS	☐ COMMINGLE PRODUCING FORMATIONS	☐ CONVERT WELL TYPE
✓ DRILLING REPORT Report Date: 3/4/2013	☐ DEEPEN	☐ FRACTURE TREAT	☐ NEW CONSTRUCTION
	☐ OPERATOR CHANGE	☐ PLUG AND ABANDON	☐ PLUG BACK
	☐ PRODUCTION START OR RESUME	☐ RECLAMATION OF WELL SITE	☐ RECOMPLETE DIFFERENT FORMATION
	☐ REPERFORATE CURRENT FORMATION	☐ SIDETRACK TO REPAIR WELL	☐ TEMPORARY ABANDON
	☐ TUBING REPAIR	☐ VENT OR FLARE	☐ WATER DISPOSAL
	☐ WATER SHUTOFF	☐ SI TA STATUS EXTENSION	☐ APD EXTENSION
	☐ WILDCAT WELL DETERMINATION	☐ OTHER	OTHER:

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Well was completed, finishing well completion report. Well TD at 8,815

Accepted by the
Utah Division of
Oil, Gas and Mining
FOR RECORD ONLY
March 06, 2013

NAME (PLEASE PRINT)	PHONE NUMBER	TITLE
Laura Abrams	720 929-6356	Regulatory Analyst II
SIGNATURE		**DATE**
N/A		3/4/2013

RECEIVED: Mar. 04, 2013

RECEIVED
MAR 12 2013
DIV. OF OIL, GAS & MINING

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

AMENDED REPORT ☐ (highlight changes) FORM 8

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

5. LEASE DESIGNATION AND SERIAL NUMBER: UO1197A-ST
6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
7. UNIT or CA AGREEMENT NAME: UTU63047A
8. WELL NAME and NUMBER: NBU 1022-11A4CS
9. API NUMBER: 4304751805
10. FIELD AND POOL, OR WILDCAT: NATURAL BUTTES

1a. TYPE OF WELL: OIL WELL ☐ GAS WELL ☑ DRY ☐ OTHER
b. TYPE OF WORK: NEW WELL ☑ HORIZ. LATS. ☐ DEEP-EN ☐ RE-ENTRY ☐ DIFF. RESVR. ☐ OTHER

2. NAME OF OPERATOR: KERR MCGEE OIL & GAS ONSHORE, L.P.

3. ADDRESS OF OPERATOR: P.O.BOX 173779 CITY DENVER STATE CO ZIP 80217
PHONE NUMBER: (720) 929-6000

4. LOCATION OF WELL (FOOTAGES)
AT SURFACE: SWNE 2411 FNL 1535 FEL S11,T10S,R22E
AT TOP PRODUCING INTERVAL REPORTED BELOW: NENE 1067 FNL 490 FEL S11,T10S,R22E
AT TOTAL DEPTH: NENE 1067 FNL 468 FEL S11,T10S,R22E

11. QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SWNE 11 10S 22E S
12. COUNTY: UINTAH
13. STATE: UTAH

14. DATE SPUDDED: 5/23/2012
15. DATE T.D. REACHED: 9/28/2012
16. DATE COMPLETED: 2/7/2013 ABANDONED ☐ READY TO PRODUCE ☑
17. ELEVATIONS (DF, RKB, RT, GL): 5064 RKB

18. TOTAL DEPTH: MD 8,815 TVD 8,484
19. PLUG BACK T.D.: MD 8,759 TVD 8,428
20. IF MULTIPLE COMPLETIONS, HOW MANY? *
21. DEPTH BRIDGE PLUG SET: MD TVD

22. TYPE ELECTRIC AND OTHER MECHANICAL LOGS RUN (Submit copy of each)
CBL/GR/CCL/TEMP

23.
WAS WELL CORED? NO ☑ YES ☐ (Submit analysis)
WAS DST RUN? NO ☑ YES ☐ (Submit report)
DIRECTIONAL SURVEY? NO ☐ YES ☑ (Submit copy)

24. CASING AND LINER RECORD (Report all strings set in well)

HOLE SIZE	SIZE/GRADE	WEIGHT (#/ft.)	TOP (MD)	BOTTOM (MD)	STAGE CEMENTER DEPTH	CEMENT TYPE & NO. OF SACKS	SLURRY VOLUME (BBL)	CEMENT TOP **	AMOUNT PULLED
20"	14" STL	36.7#	0	40		28			
11"	8 5/8" IJ-55	28#	0	2,280		1,010		0	
7 7/8"	4 1/2" I-80	11.6#	0	8,805		1,415		1590	

25. TUBING RECORD

SIZE	DEPTH SET (MD)	PACKER SET (MD)	SIZE	DEPTH SET (MD)	PACKER SET (MD)	SIZE	DEPTH SET (MD)	PACKER SET (MD)
2 3/8"	8,094							

26. PRODUCING INTERVALS

FORMATION NAME	TOP (MD)	BOTTOM (MD)	TOP (TVD)	BOTTOM (TVD)
(A) MESAVERDE	6,593	8,537		
(B)				
(C)				
(D)				

27. PERFORATION RECORD

INTERVAL (Top/Bot - MD)	SIZE	NO. HOLES	PERFORATION STATUS
6,593 8,537	0.36	183	Open ☑ Squeezed ☐
			Open ☐ Squeezed ☐
			Open ☐ Squeezed ☐
			Open ☐ Squeezed ☐

28. ACID, FRACTURE, TREATMENT, CEMENT SQUEEZE, ETC.

DEPTH INTERVAL	AMOUNT AND TYPE OF MATERIAL
6593-8537	PUMP 9571 BBLS SLICK H2O & 202,430 LBS 30/50 OTTAWA SAND
	8 STAGES

29. ENCLOSED ATTACHMENTS:

☐ ELECTRICAL/MECHANICAL LOGS ☐ GEOLOGIC REPORT ☐ DST REPORT ☑ DIRECTIONAL SURVEY
☐ SUNDRY NOTICE FOR PLUGGING AND CEMENT VERIFICATION ☐ CORE ANALYSIS ☐ OTHER:

30. WELL STATUS: PROD

(5/2000)

(CONTINUED ON BACK)

31. INITIAL PRODUCTION

INTERVAL A (As shown in item #26)

DATE FIRST PRODUCED:	TEST DATE:	HOURS TESTED:	TEST PRODUCTION RATES: →	OIL – BBL:	GAS – MCF:	WATER – BBL:	PROD. METHOD:
2/7/2013	2/9/2013	24		0	2,421	0	FLOWING

CHOKE SIZE:	TBG. PRESS.	CSG. PRESS.	API GRAVITY	BTU – GAS	GAS/OIL RATIO	24 HR PRODUCTION RATES: →	OIL – BBL:	GAS – MCF:	WATER – BBL:	INTERVAL STATUS:
20/64	1,727	2,395					0	2,421	0	PROD

INTERVAL B (As shown in item #26)

DATE FIRST PRODUCED:	TEST DATE:	HOURS TESTED:	TEST PRODUCTION RATES: →	OIL – BBL:	GAS – MCF:	WATER – BBL:	PROD. METHOD:

CHOKE SIZE:	TBG. PRESS.	CSG. PRESS.	API GRAVITY	BTU – GAS	GAS/OIL RATIO	24 HR PRODUCTION RATES: →	OIL – BBL:	GAS – MCF:	WATER – BBL:	INTERVAL STATUS:

INTERVAL C (As shown in item #26)

DATE FIRST PRODUCED:	TEST DATE:	HOURS TESTED:	TEST PRODUCTION RATES: →	OIL – BBL:	GAS – MCF:	WATER – BBL:	PROD. METHOD:

CHOKE SIZE:	TBG. PRESS.	CSG. PRESS.	API GRAVITY	BTU – GAS	GAS/OIL RATIO	24 HR PRODUCTION RATES: →	OIL – BBL:	GAS – MCF:	WATER – BBL:	INTERVAL STATUS:

INTERVAL D (As shown in item #26)

DATE FIRST PRODUCED:	TEST DATE:	HOURS TESTED:	TEST PRODUCTION RATES: →	OIL – BBL:	GAS – MCF:	WATER – BBL:	PROD. METHOD:

CHOKE SIZE:	TBG. PRESS.	CSG. PRESS.	API GRAVITY	BTU – GAS	GAS/OIL RATIO	24 HR PRODUCTION RATES: →	OIL – BBL:	GAS – MCF:	WATER – BBL:	INTERVAL STATUS:

32. DISPOSITION OF GAS (Sold, Used for Fuel, Vented, Etc.)

SOLD

33. SUMMARY OF POROUS ZONES (Include Aquifers):

Show all important zones of porosity and contents thereof: Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries.

34. FORMATION (Log) MARKERS:

Formation	Top (MD)	Bottom (MD)	Descriptions, Contents, etc.	Name	Top (Measured Depth)
				GREEN RIVER	855
				BIRD'S NEST	1,207
				MAHOGANY	1,774
				WASATCH	4,352
				MESAVERDE	6,579

35. ADDITIONAL REMARKS (Include plugging procedure)

The first 210' of the surface hole was drilled with a 12 ¼" bit. The remainder of surface hole was drilled with an 11" bit. DQX csg was run from surface to 5027'; LTC csg was run from 5027' to 8805'. Attached is the chronological well history, perforation report & final survey.

36. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records.

NAME (PLEASE PRINT) LINDSEY FRAZIER TITLE REGULATORY ANALYST

SIGNATURE DATE 3/5/2013

This report must be submitted within 30 days of

- completing or plugging a new well
- drilling horizontal laterals from an existing well bore
- recompleting to a different producing formation
- reentering a previously plugged and abandoned well
- significantly deepening an existing well bore below the previous bottom-hole depth
- drilling hydrocarbon exploratory holes, such as core samples and stratigraphic tests

* ITEM 20: Show the number of completions if production is measured separately from two or more formations.

** ITEM 24: Cement Top – Show how reported top(s) of cement were determined (circulated (CIR), calculated (CAL), cement bond log (CBL), temperature survey (TS)).

Send to: Utah Division of Oil, Gas and Mining
1594 West North Temple, Suite 1210
Box 145801
Salt Lake City, Utah 84114-5801

Phone: 801-538-5340

Fax: 801-359-3940

(5/2000)

US ROCKIES REGION

Operation Summary Report

Well: NBU 1022-11A4CS BLUE		Spud Date: 7/1/2012
Project: UTAH-UINTAH	Site: NBU 1022-11G4 PAD	Rig Name No: PROPETRO 11/11, PIONEER 54/54
Event: DRILLING	Start Date: 6/13/2012	End Date: 9/29/2012
Active Datum: RKB @5,064.00usft (above Mean Sea Level)	UWI: SW/NE/0/10/S/22/E/11/0/0/26/PM/N/2411/E/0/1535/0/0	

Date	Time Start-End	Duration (hr)	Phase	Code	Sub Code	P/U	MD From (usft)	Operation
6/30/2012	23:00 - 23:30	0.50	MIRU	01	B	P		INSTALL DIVERTOR HEAD AND BLUEY LINE. RIG UP NOV. SPOT IN RIG. SPOT IN CATWALK AND PIPE RACKS. RIG UP PIT PUMP. RIG UP PUMP. PRIME PUMP. INSPECT RIG. SAFETY MEETING
	23:30 - 0:00	0.50	PRPSPD	06	A	P		PICK UP 12.25" BIT & 8" MUD MOTOR
7/1/2012	0:00 - 0:30	0.50	PRPSPD	06	A	P		PICK UP 12.25" BIT & 8" MUD MOTOR
	0:30 - 2:00	1.50	DRLSUR	02	B	P		DRILL 12.25" SURFACE HOLE F/ 44'- 210' ROP= 166' @ 111 FPH WOB= 10/15K RPM= 50/67 SPP= 600/450 GPM=397 UP/DN/ROT= 42/30/36 TORQUE= 3000/1000 NOV DE-WATERING NO LOSSES
	2:00 - 2:30	0.50	DRLSUR	06	A	P		TOOH & LAY DOWN 12.25" BIT
	2:30 - 4:00	1.50	DRLSUR	06	A	P		PICK UP 11" BIT, DIR. TOOLS, SCRIBE & TIH
	4:00 - 9:00	5.00	DRLSUR	02	D	P		DRILL 11" SURFACE HOLE F/ 210'- 950' ROP= 740' @ 82 FPH WOB= 18/22K RPM= 50/67 SPP= 1250/1000 GPM=397 UP/DN/ROT= 59/42/49 TORQUE= 3000/1000 NOV DE-WATERING NO LOSSES
	9:00 - 14:30	5.50	DRLSUR	22	L	Z		**** MWD TOOL FAILED /// TOOH & REPLACE MWD TOOL /// TIH
	14:30 - 23:00	8.50	DRLSUR	02	D	P		DRILL 11" SURFACE HOLE F/ 950'-1670' ROP= 720' @ 85 FPH WOB= 18/22K RPM= 50/67 SPP= 1250/1000 GPM=397 UP/DN/ROT= 76/50/55 TORQUE= 3000/1000 NOV DE-WATERING LOST RETURNS @ 1540' AIR ON @ 2300 CFM
	23:00 - 0:00	1.00	DRLSUR	08	B	Z		****REPLACE VALVES IN PUMP

US ROCKIES REGION

Operation Summary Report

Well: NBU 1022-11A4CS BLUE			Spud Date: 7/1/2012
Project: UTAH-UINTAH	Site: NBU 1022-11G4 PAD		Rig Name No: PROPETRO 11/11, PIONEER 54/54
Event: DRILLING	Start Date: 6/13/2012		End Date: 9/29/2012
Active Datum: RKB @5,064.00usft (above Mean Sea Level)	UWI: SW/NE/0/10/S/22/E/11/0/0/26/PM/N/2411/E/0/1535/0/0		

Date	Time Start-End	Duration (hr)	Phase	Code	Sub Code	P/U	MD From (usft)	Operation
7/2/2012	0:00 - 8:30	8.50	DRLSUR	02	D	P		DRILL 11" SURFACE HOLE F/ 1670' -2295' ROP= 625' @ 74 FPH WOB= 18/22K RPM= 50/67 SPP= 1250/1000 GPM=397 UP/DN/ROT= 93/52/70 TORQUE= 3000/1000 NOV DE-WATERING LOST RETURNS @ 1540' AIR ON @ 2300 CFM
	8:30 - 10:30	2.00	DRLSUR	05	F	P		CIRCULATE & CONDITION HOLE FOR 8.625" CSG
	10:30 - 11:30	1.00	DRLSUR	06	A	P		LAY DOWN DRILL STRING & DIR. TOOLS
	11:30 - 12:30	1.00	DRLSUR	08	A	Z		****BLEW HYDRAULIC HOSE ON RIG CONTROLLS /// REPLACE HOSE
	12:30 - 14:00	1.50	DRLSUR	06	A	P		LAY DOWN DRILL STRING & DIR. TOOLS
	14:00 - 15:00	1.00	CSGSUR	12	A	P		MOVE PIPE RACKS AND CATWALK. PULL DIVERTER HEAD. RIG UP TO RUN CSG. MOVE CSG INTO POSITION TO P/U.
	15:00 - 16:30	1.50	CSGSUR	12	C	P		PJSM /// RUN 51 JT'S, 8-5/8", 28#, J-55, LT&C CSG /// SHOE SET @ 2264' & BAFFLE @ 2218'
	16:30 - 17:00	0.50	CSGSUR	12	B	P		PJSM /// RUN 200' OF 1"PIPE DN BACKSIDE /// RIG DOWN RIG, MOVE OFF WELL /// RIG UP CEMENT TRUCK & 2" HARD LINES
	17:00 - 19:00	2.00	CSGSUR	12	E	P		PRO PETRO CMTERS MAKE UP HEAD & LOAD PLUG TEST LINES TO 2000 PSI. PUMP 130 BBLS FOLLOWED BY 20 BBL'S GEL WATER /// TAIL = 300 SX(61.4 BBLS) OF 15.8# & 1.15 YIELD (2% CACL2, 1/4# /SK OF FLOCELE) /// DROP PLUG & DISPLACE W/ 138 BBLS WATER /// PLUG DOWN @ 18:20 07/02/2012 /// BUMP PLUG @ 500 PSI /// FINAL LIFT = 210 PSI. /// CHECK FLOAT, HELD W/ 1 BBL BACK /// NO RETURNS THRU OUT JOB /// PUMP 150 SXS 15.8# (20.5 BBLS) CMT W/4% CALCIUM DOWN 1". NO CEMENT TO SURFACE
	19:00 - 22:00	3.00	CSGSUR	12	E	P		WOC FOR 1.5 HOURS & PUMP TOP OUT #2 WITH 150 SX CLASS G CMT @ 1.15 YIELD & 15.8 WT + 4% CACL2 /// NO CMT TO SURFACE
	22:00 - 0:00	2.00	CSGSUR	12	E	P		WOC FOR 1.5 HOURS & PUMP TOP OUT #3 WITH 160 SX CLASS G CMT @ 1.15 YIELD & 15.8 WT + 4% CACL2 /// NO CMT TO SURFACE /// RELEASE RIG @ 00:00 07/03/2012
9/25/2012	18:00 - 18:30	0.50	MIRU3	01	C	P		SKID RIG TO THE NBU 1022-11A4CS
	18:30 - 19:00	0.50	PRPSPD	14	A	P		N/U BOPE
	19:00 - 22:30	3.50	PRPSPD	15	A	P		HELD SAFETY MEETING, R/U & TEST BOPE, TEST PIPE RAMS, BLIND RAMS, I-BOP, IN& OUTSIDE CHOKE & KILL LINE VALVES, 250 LOW 5000 HIGH, ANN 250-2500, SURFACE CASING 1500 FOR 30 MIN, R/D
	22:30 - 0:00	1.50	PRPSPD	06	A	P		P/U SMITH BIT MDI 616 W/ 6X16 JETS, MM .23 RPG, 1.5 BEND, DIR TOOLS & SCRIBE, TRIP IN TO TOP OF CEMENT @ 2158
	22:30 - 22:30	0.00	PRPSPD	14	B	P		INSTALL WEAR BUSHING, PRE-SPUD INSPECTION

US ROCKIES REGION

Operation Summary Report

Well: NBU 1022-11A4CS BLUE		Spud Date: 7/1/2012
Project: UTAH-UINTAH	Site: NBU 1022-11G4 PAD	Rig Name No: PROPETRO 11/11, PIONEER 54/54
Event: DRILLING	Start Date: 6/13/2012	End Date: 9/29/2012
Active Datum: RKB @5,064.00usft (above Mean Sea Level)	UWI: SW/NE/0/10/S/22/E/11/0/0/26/PM/N/2411/E/0/1535/0/0	

Date	Time Start-End	Duration (hr)	Phase	Code	Sub Code	P/U	MD From (usft)	Operation
9/26/2012	0:00 - 1:00	1.00	DRLPRV	02	F	P		DRILL CEMENT, F/E & OPEN HOLE TO 2310, SHOE @ 2274', BAFFLE @ 2228
	1:00 - 15:30	14.50	DRLPRV	02	B	P		CLOSED LOOP SYSTEM DRILL F/ 2310 TO 4368=2058 AVG 142 WOB / 18-24 RPM TOP DRIVE 50-60 (2 PUMPS) - SPM 200 GPM 586 MW 8.4 PPG 29 VIS TRQ ON/OFF = 9-6 K PSI ON /OFF 2100-1700, DIFF 200-500 PU/SO/RT =140/110/98 K SLIDE = 23% 473 ROT = 77% 1585 NOV / 2- DEWATERING 3' LOW 6' RIGHT OF LINE 0 DRILL FLARE, 0 CONN FLARE
	15:30 - 16:00	0.50	DRLPRV	07	A	P		RIG SERVICE
	16:00 - 0:00	8.00	DRLPRV					CLOSED LOOP SYSTEM DRILL F/ 4368 TO 5780=1412 AVG 176 WOB / 18-24 RPM TOP DRIVE 50-60 (2 PUMPS) - SPM 200 GPM 586 MW 8.4 PPG 29 VIS TRQ ON/OFF = 11-9 K PSI ON /OFF 2100-2400, DIFF 200-500 PU/SO/RT =170/120/140 K SLIDE =12% 169' ROT = 88% 1243' NOV / 2- DEWATERING 4' NORTH 11' WEST OF CENTER TARGET 0 DRILL FLARE, 0 CONN FLARE
9/27/2012	0:00 - 14:30	14.50	DRLPRV	02	B	P		CLOSED LOOP SYSTEM DRILL F/5780 TO 7878=2098 AVG 144 WOB / 18-24 RPM TOP DRIVE 50-60 (2 PUMPS) - SPM 200 GPM 586 MW 8.4 PPG 29 VIS TRQ ON/OFF = 11-9 K PSI ON /OFF 2100-2400, DIFF 200-500 PU/SO/RT =170/120/140 K SLIDE =105 17% TIME 2.58 ROT =2012 83% 12 HR NOV / 2- DEWATERING 18 'NORTH 2' WEST OF CENTER TARGET 8-12' DRILL FLARE, 0 CONN FLARE
	14:30 - 15:00	0.50	DRLPRV	07	A	P		RIG SERVICE

Operation Summary Report

Well: NBU 1022-11A4CS BLUE			Spud Date: 7/1/2012
Project: UTAH-UINTAH	Site: NBU 1022-11G4 PAD		Rig Name No: PROPETRO 11/11, PIONEER 54/54
Event: DRILLING	Start Date: 6/13/2012		End Date: 9/29/2012
Active Datum: RKB @5,064.00usft (above Mean Sea Level)	UWI: SW/NE/0/10/S/22/E/11/0/0/26/PM/N/2411/E/0/1535/0/0		

Date	Time Start-End	Duration (hr)	Phase	Code	Sub Code	P/U	MD From (usft)	Operation
	15:00 - 19:00	4.00	DRLPRV	02	B	P		CLOSED LOOP SYSTEM DRILL F/7878 TO 8352=474 AVG 105 WOB / 18-24 RPM TOP DRIVE 50-60 (2 PUMPS) - SPM 200 GPM 586 MW 8.4 PPG 29 VIS TRQ ON/OFF = 13-10 K PSI ON /OFF 2100-2400, DIFF 200-500 PU/SO/RT =190/140/160 K SLIDE =0 ROT =100% NOV / 2- DEWATERING 15 'NORTH 2' WEST OF CENTER TARGET 8-12' DRILL FLARE, 0 CONN FLARE
	19:00 - 20:00	1.00	DRLPRV	05	G	P		DISPLACE HOLE WITH 11.3# 38 VIS MUD
	20:00 - 0:00	4.00	DRLPRV	02	B	P		CLOSED LOOP SYSTEM DRILL F/8352 TO 8685 = AVG WOB / 18-24 RPM TOP DRIVE 50-60 (2 PUMPS) - SPM 176 GPM 510 MW 11.8 PPG 40 VIS TRQ ON/OFF = 11-9 K PSI ON /OFF 2100-2400, DIFF 200-500 PU/SO/RT =190/140/160 K SLIDE =0 ROT =100% NOV / 2- CONVENTIONAL 15 'NORTH 7" EAST OF CENTER TARGET 5' DRILL FLARE, 8 CONN FLARE
9/28/2012	0:00 - 2:00	2.00	DRLPRV	02	B	P		CLOSED LOOP SYSTEM DRILL F/8685 TO TD 8815 =105 AVG 65 WOB / 18-24 RPM TOP DRIVE 50-60 (2 PUMPS) - SPM 176 GPM 510 MW 11.9 PPG 40 VIS TRQ ON/OFF = 11-9 K PSI ON /OFF 2100-2400, DIFF 200-500 PU/SO/RT =190/140/160 K SLIDE =0 ROT =100% NOV / 2- CONVENTIONAL 8 'NORTH 11" EAST OF CENTER TARGET 0 DRILL FLARE, 3 CONN FLARE
	2:00 - 3:00	1.00	DRLPRV	05	C	P		CIRCULATE BOTTOMS UP FOR WIPERTRIP
	3:00 - 8:00	5.00	DRLPRV	06	E	P		WIPER TRIP TO SHOE,TIGHT SPOT 3950',BREAK CIRC 5890',TIH,WASH 90' TO BOTTOM
	8:00 - 10:30	2.50	DRLPRV	05	C	P		CIRCULATE FOR TRIP,20' FLARE FOR 30 MIN,MIX BAR & CONDITION FOR TRIP
	10:30 - 14:30	4.00	DRLPRV	06	A	P		TRIP OUT FOR CASING RUN
	14:30 - 15:00	0.50	CSGPRO	14	B	P		PULL WEARBUSHING
	15:00 - 21:00	6.00	CSGPRO	12	C	P		RUN 4.5 11.6# I-80,,113 JTS DQX,85 JTS LTC,1 MARKER 1 X-O TO 8805' MD,LAND CASING
	21:00 - 22:30	1.50	CSGPRO	05	D	P		CIRCULATE FOR CEMENT,10-20' FLARE FOR 30 MINUTES

US ROCKIES REGION

Operation Summary Report

Well: NBU 1022-11A4CS BLUE		Spud Date: 7/1/2012	
Project: UTAH-UINTAH	Site: NBU 1022-11G4 PAD		Rig Name No: PROPETRO 11/11, PIONEER 54/54
Event: DRILLING	Start Date: 6/13/2012		End Date: 9/29/2012
Active Datum: RKB @5,064.00usft (above Mean Sea Level)	UWI: SW/NE/0/10/S/22/E/11/0/0/26/PM/N/2411/E/0/1535/0/0		

Date	Time Start-End	Duration (hr)	Phase	Code	Sub Code	P/U	MD From (usft)	Operation
	22:30 - 0:00	1.50	CSGPRO	12	E	P		SAFETY MEET W/ BAKER,PUMP 25 BBL SPACER,475SX LEAD #12.5 1.98YLD PLII+6%Gel+.3%R-3+.2%SM+.25#/SK CF+5#/SK Kol-Seal+.4%FL-525#blsf 940SX TAIL 14.3# 1.32 YLD 50/50 poz+2%gell+0.15% R-3 + 10%salt 0.005% sf+.5%EC-1 DISPLACE 136 BBLS CLAYFIX,FINALLIFT 2520,BUMPPLUG 500 OVER FLOATS HELD,20 BBLS SPACER TO PIT,1.5 BBLS TO INVENTORY
9/29/2012	0:00 - 1:00	1.00	CSGPRO	12	E	P		SAFETY MEET W/ BAKER,PUMP 25 BBL SPACER,475SX LEAD #12.5 1.98YLD PLII+6%Gel+.3%R-3+.2%SM+.25#/SK CF+5#/SK Kol-Seal+.4%FL-525#blsf 940SX TAIL 14.3# 1.32 YLD 50/50 poz+2%gell+0.15% R-3 + 10%salt 0.005% sf+.5%EC-1 DISPLACE 136 BBLS CLAYFIX,FINALLIFT 2520,BUMPPLUG 500 OVER FLOATS HELD,20 BBLS SPACER TO PIT,1.5 BBLS TO INVENTORY
	1:00 - 1:30	0.50	RDMO	14	B	P		SET PACK OFF WITH CAMERON
	1:30 - 3:00	1.50	RDMO	01	E	P		SAVE MUD,PREP FOR SKID,RIG RELEASE @ 03:00AM 9/29/2012

1 General

1.1 Customer Information

Company	US ROCKIES REGION
Representative	
Address	

1.2 Well/Wellbore Information

Well	NBU 1022-11A4CS BLUE	**Wellbore No.**	OH
Well Name	NBU 1022-11A4CS	**Wellbore Name**	NBU 1022-11A4CS
Report No.	1	**Report Date**	1/22/2013
Project	UTAH-UINTAH	**Site**	NBU 1022-11G4 PAD
Rig Name/No.		**Event**	COMPLETION
Start Date	1/22/2013	**End Date**	2/7/2013
Spud Date	7/1/2012	**Active Datum**	RKB @5,064.00usft (above Mean Sea Level)
UWI	SW/NE/0/10/S/22/E/11/0/0/26/PM/N/2411/E/0/1535/0/0		

1.3 General

Contractor		**Job Method**		**Supervisor**	
Perforated Assembly		**Conveyed Method**			

1.4 Initial Conditions

Fluid Type		**Fluid Density**	
Surface Press		**Estimate Res Press**	
TVD Fluid Top		**Fluid Head**	
Hydrostatic Press		**Press Difference**	
Balance Cond	NEUTRAL		

1.5 Summary

Gross Interval	6,593.0 (usft)-8,537.0 (usft	**Start Date/Time**	1/28/2013 12:00AM
No. of Intervals	56	**End Date/Time**	1/28/2013 12:00AM
Total Shots	183	**Net Perforation Interval**	59.00 (usft)
Avg Shot Density	3.10 (shot/ft)	**Final Surface Pressure**	
		Final Press Date	

2 Intervals

2.1 Perforated Interval

Date	Formation/ Reservoir	CCL@ (usft)	CCL-TS (usft)	MD Top (usft)	MD Base (usft)	Shot Density (shot/ft)	Misfires/ Add. Shot	Diameter (in)	Carr Type /Stage No	Carr Size (in)	Phasing (°)	Charge Desc /Charge Manufacturer	Charge Weight (gram)	Reason	Misrun
1/28/2013 12:00AM	MESAVERDE/			6,593.0	6,595.0	4.00		0.360	EXP/	3.375	90.00		23.00	PRODUCTION	

2.1 Perforated Interval (Continued)

Date	Formation/ Reservoir	CCL@ (usft)	CCL-TS (usft)	MD Top (usft)	MD Base (usft)	Shot Density (shot/ft)	Misfires/ Add. Shot	Diameter (in)	Carr Type /Stage No	Carr Size (in)	Phasing (°)	Charge Desc /Charge Manufacturer	Charge Weight (gram)	Reason	Misrun
1/28/2013 12:00AM	MESAVERDE/			6,625.0	6,627.0	4.00		0.360	EXP/	3.375	90.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			6,797.0	6,799.0	4.00		0.360	EXP/	3.375	90.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			6,843.0	6,844.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			6,863.0	6,864.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			6,883.0	6,884.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			6,910.0	6,911.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			6,950.0	6,951.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			6,980.0	6,981.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			7,053.0	7,054.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			7,107.0	7,108.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			7,192.0	7,193.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			7,230.0	7,231.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			7,264.0	7,265.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			7,287.0	7,288.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			7,344.0	7,345.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			7,361.0	7,362.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			7,427.0	7,428.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			7,439.0	7,440.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			7,514.0	7,515.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			7,524.0	7,525.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			7,549.0	7,550.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	

2.1 Perforated Interval (Continued)

Date	Formation/ Reservoir	CCL@ (usft)	CCL-TS (usft)	MD Top (usft)	MD Base (usft)	Shot Density (shot/ft)	Misfires/ Add. Shot	Diameter (in)	Carr Type /Stage No	Carr Size (in)	Phasing (°)	Charge Desc /Charge Manufacturer	Charge Weight (gram)	Reason	Misrun
1/28/2013 12:00AM	MESAVERDE/			7,579.0	7,580.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			7,610.0	7,611.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			7,642.0	7,643.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			7,667.0	7,668.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			7,682.0	7,683.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			7,713.0	7,714.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			7,729.0	7,730.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			7,750.0	7,751.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			7,765.0	7,766.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			7,800.0	7,801.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			7,812.0	7,813.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			7,854.0	7,855.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			7,887.0	7,888.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			7,917.0	7,918.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			7,956.0	7,957.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			7,972.0	7,973.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			8,011.0	8,012.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			8,023.0	8,024.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			8,049.0	8,050.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			8,065.0	8,066.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			8,118.0	8,119.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	

2.1 Perforated Interval (Continued)

Date	Formation/ Reservoir	CCL@ (usft)	CCL-TS (usft)	MD Top (usft)	MD Base (usft)	Shot Density (shot/ft)	Misfires/ Add. Shot	Diameter (in)	Carr Type /Stage No	Carr Size (in)	Phasing (°)	Charge Desc /Charge Manufacturer	Charge Weight (gram)	Reason	Misrun
1/28/2013 12:00AM	MESAVERDE/			8,138.0	8,139.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			8,147.0	8,148.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			8,177.0	8,178.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			8,190.0	8,191.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			8,271.0	8,272.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			8,290.0	8,291.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			8,349.0	8,350.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			8,388.0	8,389.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			8,425.0	8,426.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			8,451.0	8,452.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			8,466.0	8,467.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			8,514.0	8,515.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
1/28/2013 12:00AM	MESAVERDE/			8,536.0	8,537.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	

3 Plots

US ROCKIES REGION

Operation Summary Report

Well: NBU 1022-11A4CS BLUE		Spud Date: 7/1/2012	
Project: UTAH-UINTAH	Site: NBU 1022-11G4 PAD		Rig Name No: MILES 2/2
Event: COMPLETION	Start Date: 1/22/2013		End Date: 2/7/2013
Active Datum: RKB @5,064.00usft (above Mean Sea Level)	UWI: SW/NE/0/10/S/22/E/11/0/0/26/PM/N/2411/E/0/1535/0/0		

Date	Time Start-End	Duration (hr)	Phase	Code	Sub Code	P/U	MD From (usft)	Operation
7/1/2012	-							
7/2/2012	-							
1/22/2013	10:00 - 10:24	0.40	SUBSPR	33	C	P		FILL SURFACE CSG. MIRU CAMERON QUICK TEST. 1ST PSI TEST T/ 7000 PSI. HELD FOR 15 MIN LOST 82 PSI. NO COMMUNICATION OR MIGRATION WITH SURFACE CSG BLEED OFF PSI. MOVE T/ NEXT WELL.SWIFN
1/25/2013	8:00 - 12:00	4.00	SUBSPR	37		P		PERF STG 1)PU 3 1/8 EXP GUN, 23 GM, .36 HOLE SIZE. 90 DEG PHASING. RIH PERF AS PER PERF DESIGN. POOH. SWIFWPERF STG 1)PU 3 1/8 EXP GUN, 23 GM, .36 HOLE SIZE. 90 DEG PHASING. RIH PERF AS PER PERF DESIGN. POOH. SWIFW
1/28/2013	6:30 - 7:00	0.50	FRAC	48		P		JSA-SAFETY MEETING
	7:00 - 11:00	4.00	FRAC	46	E	Z		WAIT FOR NABORS FRAC TO REPAIR COMPUTOR
	11:00 - 17:30	6.50	FRAC	36	B	P		PRESSURE TEST SURFACE LINE TO 8,136#, LOST 700# IN 10 MIN. 1.REFER TO STIMULATION PJR FOR FLUID, SAND AND CHEMICAL VOLUME, ALL STAGES WERE PERFORATED ACCORDING TO PERF RECORD IN OPEN WELL, ALL STAGES WERE STIMULATED TO VENDOR POST JOB REPORT. (FRAC STG #1) WHP = 1727#, BRK DN PERFS = 3013#, @ 4.8 BPM, ISIP = 2339#, FG = 0.71 , FINAL ISIP = 2591#, FINAL FG = 0.75 (FRAC STG #2) WHP = 2299#, BRK DN PERFS = 3670#, @ = 6.9 BPM, ISIP = 2405#, FG = 0.73, FINAL ISIP = 2737#, FINAL FG 0.77, SHUT WELL IN SDFN
1/29/2013	6:30 - 7:00	0.50	FRAC	48		P		JSA-SAFETY MEETING

US ROCKIES REGION

Operation Summary Report

Well: NBU 1022-11A4CS BLUE			Spud Date: 7/1/2012
Project: UTAH-UINTAH	Site: NBU 1022-11G4 PAD		Rig Name No: MILES 2/2
Event: COMPLETION	Start Date: 1/22/2013		End Date: 2/7/2013
Active Datum: RKB @5,064.00usft (above Mean Sea Level)	UWI: SW/NE/0/10/S/22/E/11/0/0/26/PM/N/2411/E/0/1535/0/0		

Date	Time Start-End	Duration (hr)	Phase	Code	Sub Code	P/U	MD From (usft)	Operation
	7:00 - 17:30	10.50	FRAC	36	B	P		1. REFER TO STIMULATION PJR FOR FLUID, SAND AND CHEMICAL VOLUME, ALL STAGES WERE PERFORATED ACCORDING TO PERF RECORD IN OPEN WELL, ALL STAGES WERE STIMULATED TO VENDOR POST JOB REPORT. (FRAC STG #3) WHP = 2081#, BRK DN PERFS = 3681#, @ 4 BPM, ISIP = 2331#, F.G = 0.73 , FINAIL ISIP = 2602#, FINIAL F.G. = 0.76, (FRAC STG #4) WHP = 1184#, BRK DN PERFS = 3658#, @ 4.7 BPM, ISIP = 1861#, FG = 0.67 , FINAL ISIP = 2003 #, FINAL FG = 0.70 , (FRAC STG #5) WHP = 1646#, BRK DN PERFS = 1994#, @ = 6.8 BPM, ISIP = 1667#, F G = 0.66 , FINAL ISIP = 2043#, FINAL F G = 0.71 , SHUT WELL IN SDFN
1/30/2013	6:30 - 7:00	0.50	FRAC	48		P		JSA-SAFETY MEETING
	7:00 - 17:30	10.50	FRAC	36	B	P		1.REFER TO STIMULATION PJR FOR FLUID, SAND AND CHEMICAL VOLUME, ALL STAGES WERE PERFORATED ACCORDING TO PERF RECORD IN OPEN WELL, ALL STAGES WERE STIMULATED TO VENDOR POST JOB REPORT. (FRAC STG #6) WHP = 1305#, BRK DN PERFS = 2711#, @ 5.2 BPM, ISIP = 1612#, F G = 0.66 , FINAL ISIP = 2666#, FINAL F G = 0.79 , (FRAC STG #7) WHP = 1186#, BRK DN PERFS = 2579#, @ = 5 BPM, ISIP = 1658#, F G = 0.68 , FINAL ISIP = 2461#, FINAL F G = 0.79 , (FRAC STG #8) WHP = 1078#, BRK DN PERFS = 2836#, @ 5 BPM, ISIP = 1491#, F G = 0.66 , FINAL ISIP = 2497#, FINAL F G = 0.81 , (KILL PLUG) P/U RIH W/ HALIBURTON 8K CBP, SET FOR TOP KILL @ = 6543' R/D WIRELINE AND FRAC CREW, SHUT WELL IN, TOTAL FLUID PUMP'D = 9571 BBLS TOTAL SAND PUMP'D = 202430 #
2/6/2013	7:00 - 7:30	0.50	DRLOUT	48		P		TRIPPING TBG
	7:30 - 12:00	4.50	DRLOUT	31	I	P		MIRU, NDWH, NU BOP'S, PU BIT,POBS, SN, TBG, TIH TO 6543', 207 JTS, BREAK CIRC, TEST BOP'S 3000#, RU PWR SWIVEL,
	12:00 - 16:30	4.50	DRLOUT	44	C	P		MILL 4 PLUGS, 7470' 236 JTS, HAD LARGE INCREASE, BLOW OUT ON BLOW DWN LINE, FIXED PROBLEM, WINTERIZE RIG, SWIFN
2/7/2013	7:00 - 7:30	0.50	DRLOUT	48		P		MILLING PLUGS

US ROCKIES REGION

Operation Summary Report

Well: NBU 1022-11A4CS BLUE			Spud Date: 7/1/2012
Project: UTAH-UINTAH	Site: NBU 1022-11G4 PAD		Rig Name No: MILES 2/2
Event: COMPLETION	Start Date: 1/22/2013		End Date: 2/7/2013
Active Datum: RKB @5,064.00usft (above Mean Sea Level)	UWI: SW/NE/0/10/S/22/E/11/0/0/26/PM/N/2411/E/0/1535/0/0		

Date	Time Start-End	Duration (hr)	Phase	Code	Sub Code	P/U	MD From (usft)	Operation
	7:30 - 12:00	4.50	DRLOUT	44	C	P		MILL 4 CBP'S, 251 JTS, 8321',C/O 30' SAND,TO PBTD, 276 JTS, 8759', POOH TO 8094.42', 255 JTS, LAND TBG, ND BOP'S, NUWH, POBS, 1200#, PRESSURE TEST FLOW LINE 3000#, RDMO TO NBU 1022-11G1CS PLUG# 1 6543' 5 ' SAND 5 MIN 000# KICK PLUG# 2 6829' 30' SAND 5 MIN 400# KICK PLUG# 3 6894' 60' SAND 5 MIN 600# KICK PLUG# 4 7138' 70' SAND 5 MIN 1200# KICK PLUG# 5 7470' 30' SAND 5 MIN 000# KICK PLUG# 6 7703' 100' SAND 5 MIN 300# KICK PLUG# 7 7901' 30' SAND 5 MIN 400# KICK PLUG# 8 8321' 30' SAND 5 MIN 300# KICK PBTD 8759' BTM PERF 8537' TBG 242 JTS 8072.39' KB 19.00' HANGER 4.125" .83' SN 1.875" 2.20' EOT 8094.42' FRAC WTR 9,571 BBLS RCVD 2,200 BBLS LTR 7,371 BBLS
	12:00 - 12:00	0.00	DRLOUT	50				WELL TURNED TO SALES @ 1120 HR ON 2/7/2013. 1200 MCFD, 1560 BWPD, FCP 2100#, FTP 1800#, 20/64" CK.
2/9/2013	7:00 -			50				WELL IP'D ON 2/9/13 - 2421 MCFD, 0 BWPD, 0 BOPD, CP 2395#, FTP 1727#, LP #, 24 HRS, CK 20/64

Scientific Drilling

Project: Uintah County, UT UTM12
Site: NBU 1022-11G4 PAD
Well: NBU 1022-11A4CS
Wellbore: OH
Design: OH

Anadarko Petroleum Corporation

WELL DETAILS: NBU 1022-11A4CS					
GL 5045 & KB 19 @ 5064.00ft (PIONEER 54)					
+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
0.00	0.00	14516986.13	2088043.81	39.964115	-109.402537

Azimuths to True North
Magnetic North: 10.89°

Magnetic Field
Strength: 52213.2snT
Dip Angle: 65.83°
Date: 07/20/2012
Model: IGRF2010

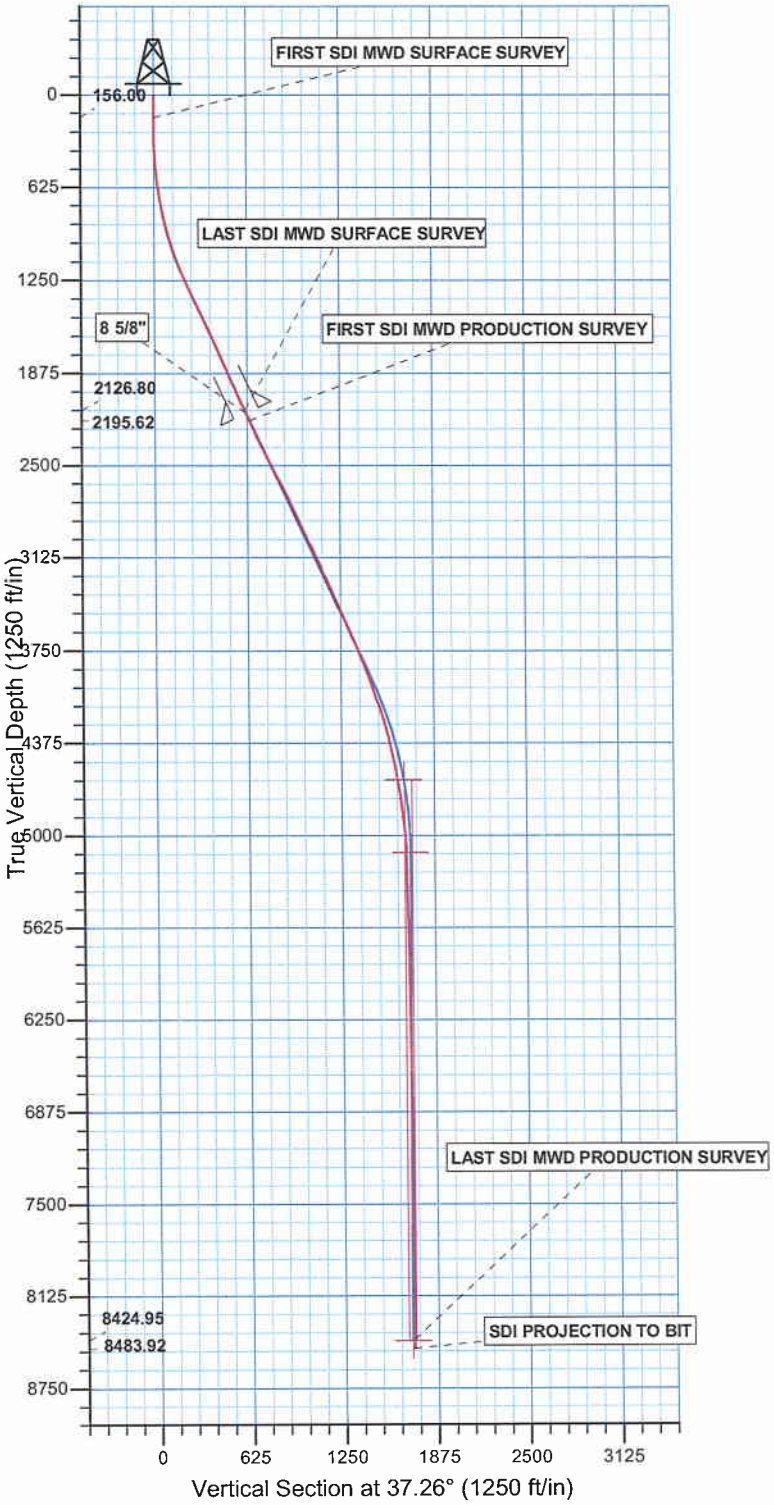

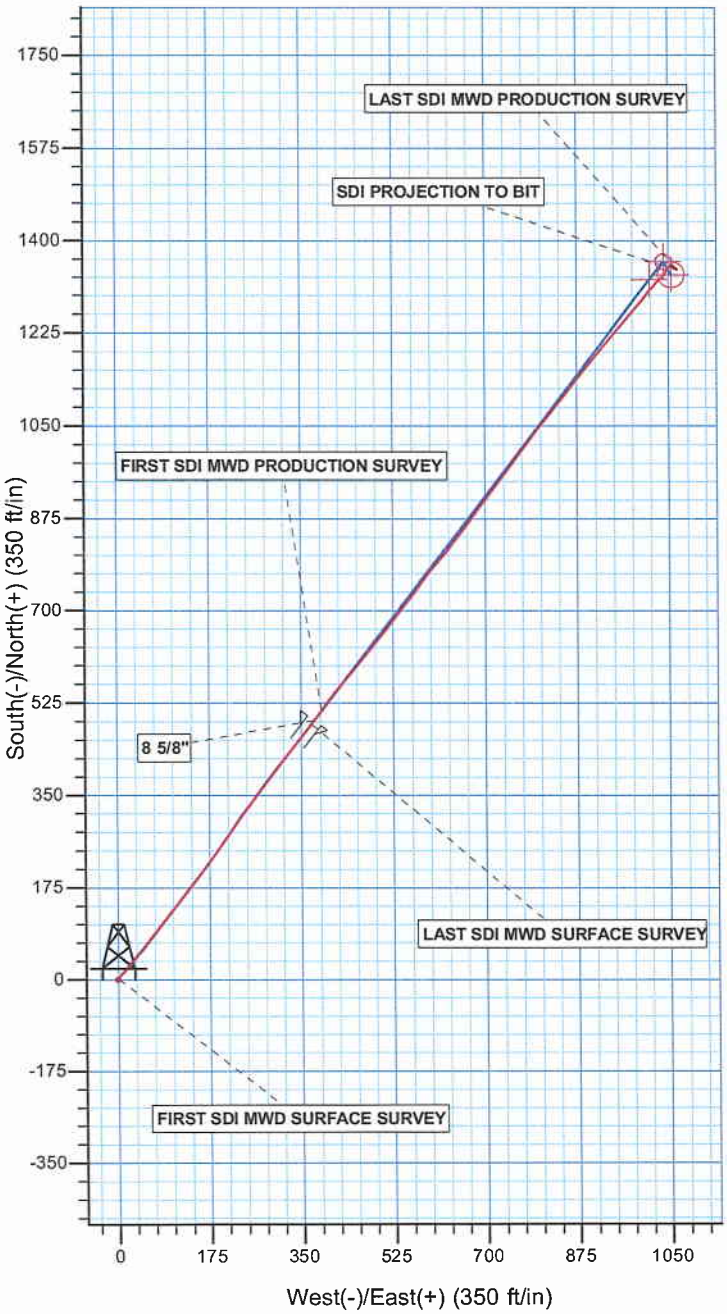

PROJECT DETAILS: Uintah County, UT UTM12	
Geodetic System:	Universal Transverse Mercator (US Survey Feet)
Datum:	NAD 1927 - Western US
Ellipsoid:	Clarke 1866
Zone:	Zone 12N (114 W to 108 W)
Location:	SECTION 11 T10S R22E
System Datum:	Mean Sea Level

Design: OH (NBU 1022-11A4CS/OH)

Created By: Gabe Kendall Date: 9:55, October 02 2012

Scientific Drilling

Kerr McGee Oil and Gas Onshore LP

Uintah County, UT UTM12
NBU 1022-11G4 PAD
NBU 1022-11A4CS

OH

Design: OH

Standard Survey Report

02 October, 2012

Anadarko Petroleum Corporation

Company:	Kerr McGee Oil and Gas Onshore LP	**Local Co-ordinate Reference:**	Well NBU 1022-11A4CS
Project:	Uintah County, UT UTM12	**TVD Reference:**	GL 5045 & KB 19 @ 5064.00ft (PIONEER 54)
Site:	NBU 1022-11G4 PAD	**MD Reference:**	GL 5045 & KB 19 @ 5064.00ft (PIONEER 54)
Well:	NBU 1022-11A4CS	**North Reference:**	True
Wellbore:	OH	**Survey Calculation Method:**	Minimum Curvature
Design:	OH	**Database:**	EDM 5000.1 Single User Db

Project Uintah County, UT UTM12

Map System:	Universal Transverse Mercator (US Survey Feet)	**System Datum:**	Mean Sea Level
Geo Datum:	NAD 1927 - Western US		
Map Zone:	Zone 12N (114 W to 108 W)		

Site NBU 1022-11G4 PAD, SECTION 11 T10S R22E

Site Position:		**Northing:**	14,516,992.11 usft	**Latitude:**	39.964131
From:	Lat/Long	**Easting:**	2,088,051.83 usft	**Longitude:**	-109.402508
Position Uncertainty:	0.00 ft	**Slot Radius:**	13.200 in	**Grid Convergence:**	1.03 °

Well NBU 1022-11A4CS, 2411 FNL 1535 FEL

Well Position	**+N/-S**	0.00 ft	**Northing:**	14,516,986.13 usft	**Latitude:**	39.964115
	+E/-W	0.00 ft	**Easting:**	2,088,043.81 usft	**Longitude:**	-109.402537
Position Uncertainty		0.00 ft	**Wellhead Elevation:**	ft	**Ground Level:**	5,045.00 ft

Wellbore OH

Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2010	07/20/12	10.89	65.83	52,213

Design OH

Audit Notes:

Version:	1.0	**Phase:**	ACTUAL	**Tie On Depth:**	0.00

Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)
	0.00	0.00	0.00	37.26

Survey Program **Date** 10/02/12

From (ft)	To (ft)	Survey (Wellbore)	Tool Name	Description
156.00	2,244.00	Survey #1 SDI MWD SURFACE (OH)	MWD SDI	MWD - Standard ver 1.0.1
2,320.00	8,815.00	Survey #2 SDI MWD PRODUCTION (OH)	MWD SDI	MWD - Standard ver 1.0.1

Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
156.00	0.53	20.30	156.00	0.68	0.25	0.69	0.34	0.34	0.00
FIRST SDI MWD SURFACE SURVEY									
184.00	0.79	23.38	184.00	0.98	0.37	1.00	0.94	0.93	11.00
212.00	0.97	23.90	211.99	1.37	0.54	1.42	0.64	0.64	1.86
242.00	0.99	20.41	241.99	1.84	0.74	1.91	0.21	0.07	-11.63
271.00	1.14	21.62	270.98	2.35	0.93	2.43	0.52	0.52	4.17
300.00	1.32	23.46	299.98	2.92	1.17	3.03	0.64	0.62	6.34
327.00	1.49	25.57	326.97	3.52	1.45	3.68	0.66	0.63	7.81
357.00	1.85	26.72	356.96	4.31	1.83	4.54	1.21	1.20	3.83

Company:	Kerr McGee Oil and Gas Onshore LP	**Local Co-ordinate Reference:**	Well NBU 1022-11A4CS
Project:	Uintah County, UT UTM12	**TVD Reference:**	GL 5045 & KB 19 @ 5064.00ft (PIONEER 54)
Site:	NBU 1022-11G4 PAD	**MD Reference:**	GL 5045 & KB 19 @ 5064.00ft (PIONEER 54)
Well:	NBU 1022-11A4CS	**North Reference:**	True
Wellbore:	OH	**Survey Calculation Method:**	Minimum Curvature
Design:	OH	**Database:**	EDM 5000.1 Single User Db

Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
445.00	3.34	38.14	444.86	7.59	4.05	8.50	1.78	1.69	12.98
535.00	5.54	40.95	534.59	12.94	8.52	15.46	2.46	2.44	3.12
625.00	7.74	41.31	623.98	20.77	15.37	25.84	2.44	2.44	0.40
715.00	10.02	41.57	712.89	31.18	24.57	39.69	2.53	2.53	0.29
805.00	12.49	40.08	801.16	44.49	36.03	57.22	2.76	2.74	-1.66
895.00	14.68	37.44	888.63	60.99	49.23	78.35	2.53	2.43	-2.93
985.00	16.71	37.35	975.27	80.33	64.01	102.69	2.26	2.26	-0.10
1,075.00	18.86	38.04	1,060.97	102.08	80.83	130.18	2.40	2.39	0.77
1,165.00	21.98	38.58	1,145.30	126.71	100.30	161.57	3.47	3.47	0.60
1,255.00	24.73	37.34	1,227.92	154.85	122.23	197.24	3.10	3.06	-1.38
1,345.00	25.06	37.09	1,309.56	185.02	145.14	235.13	0.38	0.37	-0.28
1,435.00	25.32	37.18	1,391.00	215.56	168.27	273.44	0.29	0.29	0.10
1,525.00	27.35	36.21	1,471.65	247.58	192.11	313.36	2.31	2.26	-1.08
1,615.00	25.50	34.01	1,552.25	280.32	215.16	353.37	2.33	-2.06	-2.44
1,705.00	23.39	35.33	1,634.18	310.96	236.33	390.57	2.42	-2.34	1.47
1,795.00	23.30	36.91	1,716.81	339.76	257.35	426.23	0.70	-0.10	1.76
1,885.00	23.92	36.65	1,799.28	368.63	278.94	462.27	0.70	0.69	-0.29
1,975.00	24.01	37.94	1,881.52	397.71	301.09	498.83	0.59	0.10	1.43
2,065.00	23.83	38.05	1,963.79	426.47	323.55	535.31	0.21	-0.20	0.12
2,155.00	24.31	37.80	2,045.96	455.43	346.11	572.02	0.55	0.53	-0.28
2,244.00	25.15	37.53	2,126.80	484.90	368.86	609.25	0.95	0.94	-0.30
LAST SDI MWD SURFACE SURVEY									
2,320.00	25.06	36.70	2,195.62	510.61	388.32	641.49	0.48	-0.12	-1.09
FIRST SDI MWD PRODUCTION SURVEY									
2,414.00	24.45	37.06	2,280.98	542.10	411.94	680.85	0.67	-0.65	0.38
2,509.00	25.50	41.01	2,367.10	573.22	437.21	720.92	2.07	1.11	4.16
2,604.00	26.73	39.52	2,452.40	605.13	464.22	762.68	1.47	1.29	-1.57
2,699.00	28.05	37.93	2,536.75	639.24	491.55	806.37	1.59	1.39	-1.67
2,794.00	26.82	37.67	2,621.07	673.82	518.38	850.13	1.30	-1.29	-0.27
2,889.00	26.29	37.14	2,706.05	707.55	544.18	892.60	0.61	-0.56	-0.56
2,983.00	24.80	37.23	2,790.86	739.85	568.67	933.14	1.59	-1.59	0.10
3,078.00	24.09	38.29	2,877.34	770.93	592.74	972.45	0.88	-0.75	1.12
3,173.00	26.74	39.24	2,963.14	802.71	618.28	1,013.20	2.82	2.79	1.00
3,268.00	24.33	37.04	3,048.85	834.88	643.59	1,054.13	2.73	-2.54	-2.32
3,362.00	23.90	35.70	3,134.65	865.80	666.37	1,092.53	0.74	-0.46	-1.43
3,457.00	25.15	36.62	3,221.08	897.64	689.64	1,131.96	1.38	1.32	0.97
3,552.00	23.74	37.58	3,307.56	929.00	713.35	1,171.27	1.54	-1.48	1.01
3,646.00	24.36	37.32	3,393.40	959.41	736.64	1,209.57	0.67	0.66	-0.28
3,741.00	24.89	35.74	3,479.76	991.22	760.19	1,249.15	0.89	0.56	-1.66
3,835.00	25.15	36.35	3,564.94	1,023.36	783.59	1,288.90	0.39	0.28	0.65
3,930.00	23.48	39.87	3,651.51	1,054.15	807.69	1,327.99	2.33	-1.76	3.71
4,025.00	23.04	38.90	3,738.79	1,083.14	831.50	1,365.48	0.61	-0.46	-1.02
4,119.00	21.72	38.46	3,825.71	1,111.08	853.87	1,401.26	1.42	-1.40	-0.47

Company:	Kerr McGee Oil and Gas Onshore LP	**Local Co-ordinate Reference:**	Well NBU 1022-11A4CS
Project:	Uintah County, UT UTM12	**TVD Reference:**	GL 5045 & KB 19 @ 5064.00ft (PIONEER 54)
Site:	NBU 1022-11G4 PAD	**MD Reference:**	GL 5045 & KB 19 @ 5064.00ft (PIONEER 54)
Well:	NBU 1022-11A4CS	**North Reference:**	True
Wellbore:	OH	**Survey Calculation Method:**	Minimum Curvature
Design:	OH	**Database:**	EDM 5000.1 Single User Db

Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
4,214.00	19.52	38.20	3,914.62	1,137.32	874.62	1,434.71	2.32	-2.32	-0.27
4,309.00	19.70	38.81	4,004.11	1,162.27	894.47	1,466.58	0.29	0.19	0.64
4,404.00	18.54	39.57	4,093.87	1,186.39	914.12	1,497.68	1.25	-1.22	0.80
4,499.00	16.71	41.01	4,184.41	1,208.34	932.71	1,526.40	1.98	-1.93	1.52
4,593.00	15.16	39.56	4,274.79	1,228.01	949.41	1,552.17	1.70	-1.65	-1.54
4,688.00	13.54	40.57	4,366.82	1,246.04	964.55	1,575.69	1.73	-1.71	1.06
4,783.00	12.22	43.12	4,459.43	1,261.83	978.66	1,596.79	1.51	-1.39	2.68
4,878.00	11.34	40.66	4,552.43	1,276.25	991.61	1,616.12	1.07	-0.93	-2.59
4,972.00	10.46	36.88	4,644.74	1,290.09	1,002.76	1,633.88	1.21	-0.94	-4.02
5,067.00	8.71	40.83	4,738.41	1,302.43	1,012.64	1,649.68	1.97	-1.84	4.16
5,162.00	6.95	40.22	4,832.52	1,312.26	1,021.05	1,662.60	1.85	-1.85	-0.64
5,256.00	5.63	44.09	4,925.95	1,319.92	1,027.93	1,672.86	1.47	-1.40	4.12
5,351.00	4.13	47.95	5,020.60	1,325.55	1,033.72	1,680.85	1.62	-1.58	4.06
5,446.00	2.46	39.69	5,115.44	1,329.41	1,037.56	1,686.25	1.82	-1.76	-8.69
5,541.00	1.23	28.97	5,210.39	1,331.88	1,039.35	1,689.29	1.34	-1.29	-11.28
5,636.00	0.97	53.93	5,305.38	1,333.24	1,040.50	1,691.07	0.57	-0.27	26.27
5,731.00	0.70	64.39	5,400.37	1,333.97	1,041.67	1,692.36	0.33	-0.28	11.01
5,826.00	0.88	38.46	5,495.36	1,334.79	1,042.65	1,693.61	0.42	0.19	-27.29
5,921.00	0.53	7.00	5,590.35	1,335.79	1,043.16	1,694.72	0.54	-0.37	-33.12
6,016.00	0.81	11.21	5,685.34	1,336.89	1,043.34	1,695.70	0.30	0.29	4.43
6,111.00	0.88	21.85	5,780.33	1,338.23	1,043.74	1,697.00	0.18	0.07	11.20
6,206.00	0.44	30.11	5,875.33	1,339.22	1,044.20	1,698.07	0.47	-0.46	8.69
6,300.00	0.62	68.43	5,969.32	1,339.72	1,044.85	1,698.86	0.41	0.19	40.77
6,395.00	1.06	1.46	6,064.31	1,340.78	1,045.35	1,700.02	1.05	0.46	-70.49
6,490.00	1.06	357.86	6,159.30	1,342.54	1,045.34	1,701.41	0.07	0.00	-3.79
6,585.00	0.62	17.46	6,254.29	1,343.91	1,045.46	1,702.57	0.55	-0.46	20.63
6,680.00	0.50	25.35	6,349.28	1,344.77	1,045.79	1,703.46	0.15	-0.13	8.31
6,775.00	0.62	72.65	6,444.28	1,345.30	1,046.46	1,704.28	0.49	0.13	49.79
6,870.00	1.49	32.49	6,539.26	1,346.50	1,047.62	1,705.93	1.15	0.92	-42.27
6,965.00	1.50	42.92	6,634.23	1,348.45	1,049.13	1,708.40	0.29	0.01	10.98
7,060.00	1.23	66.41	6,729.20	1,349.77	1,050.91	1,710.53	0.65	-0.28	24.73
7,155.00	1.14	75.55	6,824.18	1,350.41	1,052.76	1,712.16	0.22	-0.09	9.62
7,250.00	0.88	99.55	6,919.17	1,350.53	1,054.39	1,713.24	0.52	-0.27	25.26
7,344.00	0.97	97.96	7,013.16	1,350.30	1,055.89	1,713.97	0.10	0.10	-1.69
7,439.00	0.35	293.70	7,108.15	1,350.30	1,056.42	1,714.29	1.38	-0.65	-172.91
7,534.00	0.18	257.92	7,203.15	1,350.39	1,056.01	1,714.11	0.24	-0.18	-37.66
7,629.00	1.02	310.95	7,298.15	1,350.91	1,055.23	1,714.05	0.97	0.88	55.82
7,723.00	0.76	315.94	7,392.14	1,351.91	1,054.16	1,714.20	0.29	-0.28	5.31
7,818.00	0.44	330.52	7,487.13	1,352.68	1,053.54	1,714.44	0.37	-0.34	15.35
7,913.00	0.18	99.19	7,582.13	1,352.97	1,053.51	1,714.65	0.60	-0.27	135.44
8,008.00	0.09	47.16	7,677.13	1,353.00	1,053.71	1,714.80	0.15	-0.09	-54.77
8,103.00	0.35	72.39	7,772.13	1,353.14	1,054.04	1,715.11	0.29	0.27	26.56
8,197.00	0.62	102.36	7,866.13	1,353.11	1,054.81	1,715.56	0.38	0.29	31.88
8,293.00	0.79	117.04	7,962.12	1,352.70	1,055.91	1,715.89	0.26	0.18	15.29

Company:	Kerr McGee Oil and Gas Onshore LP	**Local Co-ordinate Reference:**	Well NBU 1022-11A4CS
Project:	Uintah County, UT UTM12	**TVD Reference:**	GL 5045 & KB 19 @ 5064.00ft (PIONEER 54)
Site:	NBU 1022-11G4 PAD	**MD Reference:**	GL 5045 & KB 19 @ 5064.00ft (PIONEER 54)
Well:	NBU 1022-11A4CS	**North Reference:**	True
Wellbore:	OH	**Survey Calculation Method:**	Minimum Curvature
Design:	OH	**Database:**	EDM 5000.1 Single User Db

Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
8,388.00	1.23	121.96	8,057.10	1,351.86	1,057.36	1,716.10	0.47	0.46	5.18
8,483.00	1.41	121.34	8,152.08	1,350.72	1,059.22	1,716.32	0.19	0.19	-0.65
8,578.00	1.58	129.78	8,247.05	1,349.27	1,061.23	1,716.38	0.29	0.18	8.88
8,672.00	1.93	135.32	8,341.00	1,347.32	1,063.34	1,716.10	0.41	0.37	5.89
8,756.00	1.93	137.25	8,424.95	1,345.27	1,065.29	1,715.66	0.08	0.00	2.30
LAST SDI MWD PRODUCTION SURVEY									
8,815.00	1.93	137.25	8,483.92	1,343.81	1,066.64	1,715.32	0.00	0.00	0.00
SDI PROJECTION TO BIT									

Casing Points

Measured Depth (ft)	Vertical Depth (ft)	Name	Casing Diameter (in)	Hole Diameter (in)
2,265.00	2,145.81	8 5/8"	8.625	11.000

Design Annotations

Measured Depth (ft)	Vertical Depth (ft)	Local Coordinates +N/-S (ft)	Local Coordinates +E/-W (ft)	Comment
156.00	156.00	0.68	0.25	FIRST SDI MWD SURFACE SURVEY
2,244.00	2,126.80	484.90	368.86	LAST SDI MWD SURFACE SURVEY
2,320.00	2,195.62	510.61	388.32	FIRST SDI MWD PRODUCTION SURVEY
8,756.00	8,424.95	1,345.27	1,065.29	LAST SDI MWD PRODUCTION SURVEY
8,815.00	8,483.92	1,343.81	1,066.64	SDI PROJECTION TO BIT

Checked By: _____ Approved By: _____ Date: _____